

机 器 附 件

MACHINE ACCESSORIES



△ 因产品技术不断改进，所有产品图片及数据以本公司最新产品为准，如有变动，恕不另行通知！

As the product technology has continuous improvement, all of the pictures and data of products may for your reference.
Our catalog and products are subject to any changes without prior notice.



温州希科机器附件有限公司

地址：浙江省乐清市北白象镇白塔王工业区开发路28号

电话：0577-62993003

传真：0577-62996003

邮编：325603

邮箱：sankq@sankq.com

网址：www.sankq.com

WENZHOU SANKQ MACHINE ACCESSORIES CO.,LTD

Add: No.28 Kaifa Road, Baitawang Industrial Zone,
Beibaixiang, Yueqing, Zhejiang, China

Tel: +86-577-62992003

Fax: +86-577-62996003

Postcode: 325603

E-mail: sankq@sankq.com

Website: www.sankq.com

Company Introduction 企业简介

SANKQ® 希科®




温州希科机器附件有限公司成立于1997年，专业制造中高档机器附件，应用于木工机械、印刷机械、包装机械、食品机械、玻璃机械、金属成型机械、管材机械、材料加工机械、纺织机械、电动车、医疗器械、健身器材等。

产品有位置显示器、位置指示表、带表手轮、手轮、转动手柄、可折手柄、可调手柄、方型拉手、椭圆拉手、手柄球、手柄套、六角把手、七星把手、扣式塞头、铰链等。“SANKQ”产品销往中国、欧洲、美洲、东南亚国家等。

WENZHOU SANKQ MACHINE ACCESSORIES CO.,LTD is a specialized manufacturer in dealing with middle and high quality machine accessories since 1997. Our company provides a comprehensive range of products which widely applied in woodworking machine, printing machine, packaging machine, food machine, glass machine, shaping machine, tube machine, press sheet metal working machine, textile machine, electromobile, medical instruments, fitness equipment and machine tool.

Our supply involves position indicators, position gauges, handwheels with position gauge, handwheels, revolving handles, fold-down handles, adjustable handles, pull handles, spherical knobs, long knobs, lobeknobs, star knobs, buckle type plug and hinge, etc.

Our products have been sold to the areas of China, European countries, American countries, South-EastAsian countries and so on.

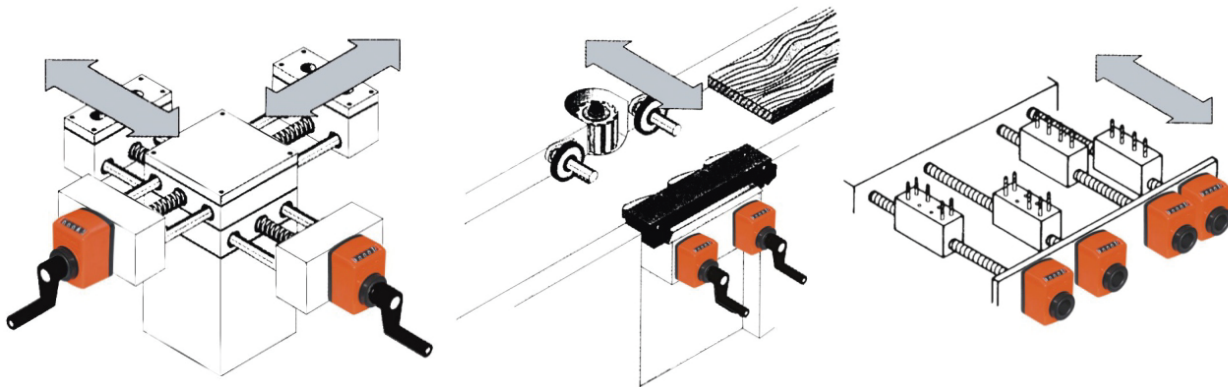

SK04型位置显示器 Position indicators

订购举例 Example for order:



SK04 12 - 1.5 (001,5) I - 14 - O P

P=带安装底座, N=不带安装底座
P=with pedestal, N=without pedestal外壳颜色: O= 橙色, B= 黑色, G= 灰色
Color: O=Orange, B=Black, G=Grey位置显示器空心轴标准内径: $\phi 14$ 毫米
小于14毫米采用轴套SK04-RH(右图)
需不锈钢空心轴加“SS”, 如SS14
Hollow shaft bore: $\phi 14$ mm
Reducing sleeve will be adopted when less than 14mm
If need stainless steel hollow shaft add “SS”
For example SS14计数方向(右图)
I=主轴顺时针旋转, 位置显示器所显示的数据增大
E=主轴逆时针旋转, 位置显示器所显示的数据增大
Counting direction
I=Clockwise increasing E=Anticlockwise increasing从零位开始, 主轴旋转1圈位置显示器所显示的数据(见表)
显示标准数据时, 本项可省略不写
Display after one revolution
It will be omitted when norm display


主轴轴向节距(见表)Axial pitch

安装型式Mounting position

型号Type

计数方向
Counting direction


安装型式 Mounting position

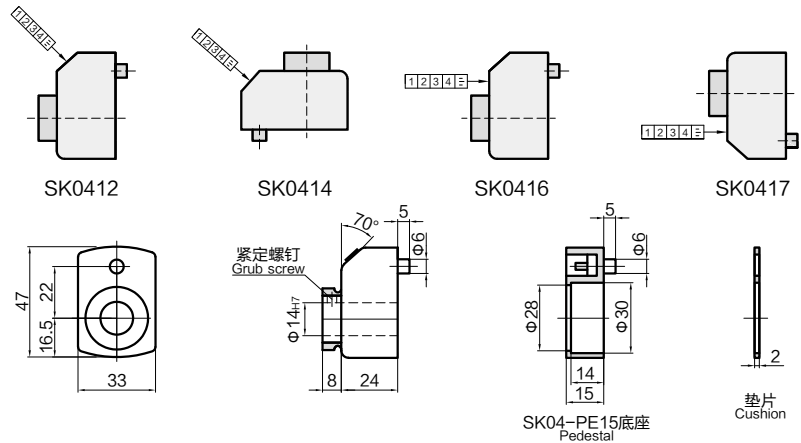

主轴轴向节距 Axial pitch	从零位开始, 主轴旋转 1 圈位置显示器所显示的数据 Display after one revolution			最大速度 (转 / 分) Max speed(r/m)
1.0mm	标准数据 Norm 001,0 —	或 Or 00,10 —	或 Or 0010 —	1500
1.25mm	标准数据 Norm 001,2/5	或 Or 00,12/5	或 Or 0012/5	1200
1.5mm	标准数据 Norm 001,5 —	或 Or 00,15 —	或 Or 0015 —	1000
1.75mm	标准数据 Norm 001,7/5	或 Or 00,17/5	或 Or 0017/5	850
2.0mm	标准数据 Norm 002,0 —	或 Or 00,20 —	或 Or 0020 —	750
2.5mm	标准数据 Norm 002,5 —	或 Or 00,25 —	或 Or 0025 —	600
3.0mm	标准数据 Norm 003,0 —	或 Or 00,30 —	或 Or 0030 —	500
4.0mm	标准数据 Norm 004,0 —	或 Or 00,40 —	或 Or 0040 —	375
5.0mm	标准数据 Norm 005,0 —	或 Or 00,50 —	或 Or 0050 —	300
6.0mm	标准数据 Norm 006,0 —	或 Or 00,60 —	或 Or 0060 —	250
8.0mm	标准数据 Norm 008,0 —	或 Or 00,80 —	或 Or 0080 —	180
10.0mm	标准数据 Norm 010,0 —	或 Or 01,00 —	或 Or 0100 —	150

SK19 型位置显示器 Position indicators

订购举例 Example for order:

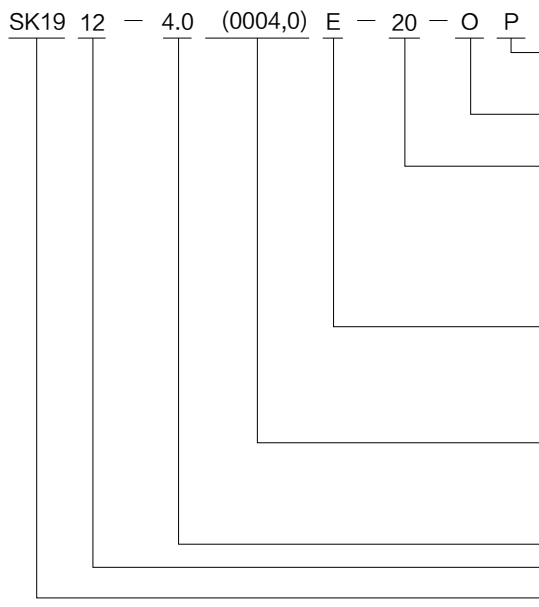

P=带安装底座, N=不带安装底座
P=with pedestal, N=without pedestal

外壳颜色: O= 橙色, B= 黑色, G= 灰色
Color: O=Orange, B=Black, G=Grey

位置显示器空心轴标准内径: $\Phi 20$ 毫米
小于20毫米采用轴套SK19-RH(右图)
需不锈钢空心轴加“SS”, 如SS20
Hollow shaft bore: $\Phi 20$ mm
Reducing sleeve will be adopted when less than 20mm
If need stainless steel hollow shaft add “SS”
For example SS20


计数方向(右图)
I=主轴顺时针旋转, 位置显示器所显示的数据增大
E=主轴逆时针旋转, 位置显示器所显示的数据增大
Counting direction
I=Clockwise increasing E=Anticlockwise increasing

从零位开始, 主轴旋转1圈位置显示器所显示的数据(见表)
显示标准数据时, 本项可省略不写
Display after one revolution
It will be omitted when norm display


主轴轴向节距(见表)Axial pitch

安装型式Mounting position

型号Type




SK19-RH
轴套内径Reducing sleeve
d=10,11,12,14,15,16,18mm




SK1912 SK1914

计数方向
Counting direction


安装型式 Mounting position




SK1912






SK1914



SK1916




SK1917



SK19-PE12底座
Pedestal
垫片
Cushion

主轴轴向节距 Axial pitch	从零位开始, 主轴旋转 1 圈位置显示器所显示的数据 Display after one revolution			最大速度 (转 / 分) Max speed(r/m)
1.0mm	标准数据 Norm 0001,0	或 Or 000,10	或 Or 00010	1500
1.25mm	标准数据 Norm 0001,2/5	或 Or 000,12/5	或 Or 00012/5	1200
1.5mm	标准数据 Norm 0001,5	或 Or 000,15	或 Or 00015	1000
1.6mm	标准数据 Norm 0001,6	或 Or 000,16	或 Or 00016	1000
2.0mm	标准数据 Norm 0002,0	或 Or 000,20	或 Or 00020	750
2.5mm	标准数据 Norm 0002,5	或 Or 000,25	或 Or 00025	600
3.0mm	标准数据 Norm 0003,0	或 Or 000,30	或 Or 00030	500
3.6mm	标准数据 Norm 0003,6	或 Or 000,36	或 Or 00036	500
4.0mm	标准数据 Norm 0004,0	或 Or 000,40	或 Or 00040	450
5.0mm	标准数据 Norm 0005,0	或 Or 000,50	或 Or 00050	300
6.0mm	标准数据 Norm 0006,0	或 Or 000,60	或 Or 00060	300
8.0mm	标准数据 Norm 0008,0	或 Or 000,80	或 Or 00080	250
10.0mm	标准数据 Norm 0010,0	或 Or 001,00	或 Or 00100	150

SK04-KP 锁紧块 Clamping plates(SK04 的附件 Annex)

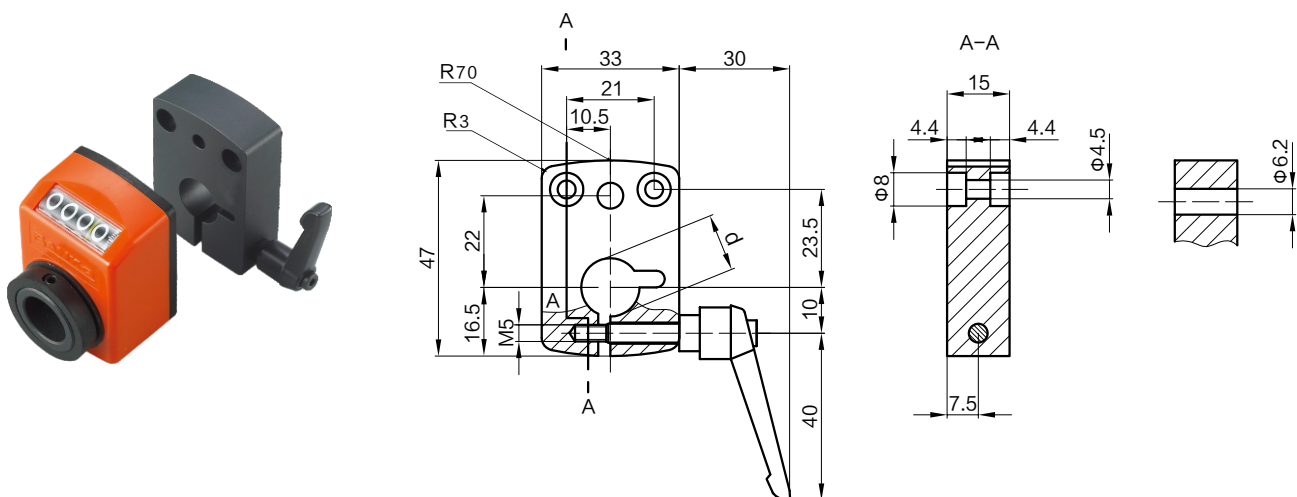

材料：黑色阳极氧化处理的铝合金

Material: Black anodized aluminum


锁紧手柄体材料：锌合金

Clamping handles body material: Zinc alloy

锁紧块孔径 d=8,10,12,14mm

Bore: d=8,10,12,14mm

SK19-KP 锁紧块 Clamping plates(SK19 的附件 Annex)

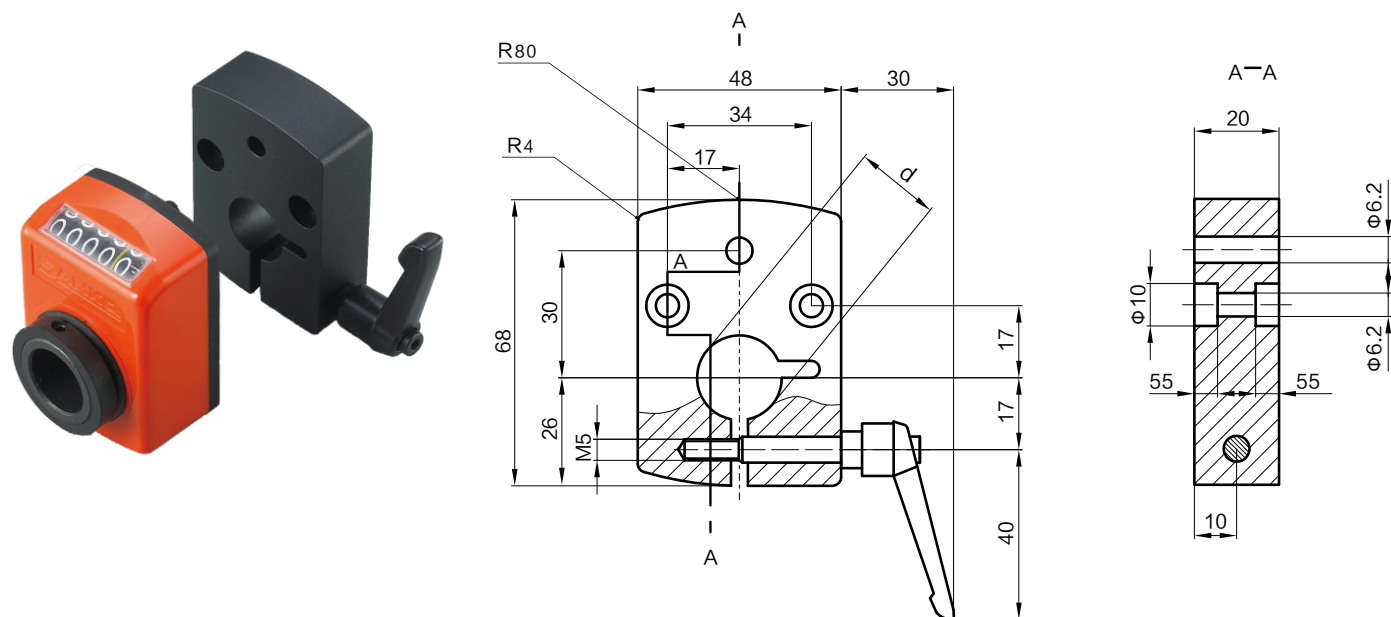

材料：黑色阳极氧化处理的铝合金

Material: Black anodized aluminum

锁紧手柄体材料：锌合金

Clamping handles body material: Zinc alloy


锁紧块孔径 d=16,20mm

Bore: d=16,20mm


订购举例 Example for order:

The diagram shows the model code SK09-12-4.0(0004,0)E-20-O-C with callouts explaining each part:

- SK09**: 定位销结构: C或D(见图)
The structure of torque pin: C or D
- 12**: 外壳颜色: O= ■ 橙色, B= ■ 黑色, G= ■ 灰色
Color: O=Orange, B=Black, G=Grey
- 4.0**: 位置显示器空心轴标准内径: $\Phi 20$ 毫米
小于20毫米采用轴套SK09-RH(右图)
Hollow shaft bore: $\Phi 20$ mm
Reducing sleeve will be adopted when less than 20mm
- (0004,0)**: 计数方向(右图)
I=主轴顺时针旋转, 位置显示器所显示的数据增大
E=主轴逆时针旋转, 位置显示器所显示的数据增大
Counting direction
I=Clockwise increasing E=Anticlockwise increasing
- 0**: 从零位开始, 主轴旋转1圈位置显示器所显示的数据(见表)
显示标准数据时, 本项可省略不写
Display after one revolution
It will be omitted when norm display
- E**: 主轴轴向节距(见表)Axial pitch
- 20**: 安装型式Mounting position
- O**: 型号Type
- C**: 定位销结构: C或D(见图)
The structure of torque pin: C or D




SK09-RH
轴套内径Reducing sleeve
d=10,11,12,14,15,16,18mm



SK0912 SK0914

计数方向
Counting direction



安装型式 Mounting position

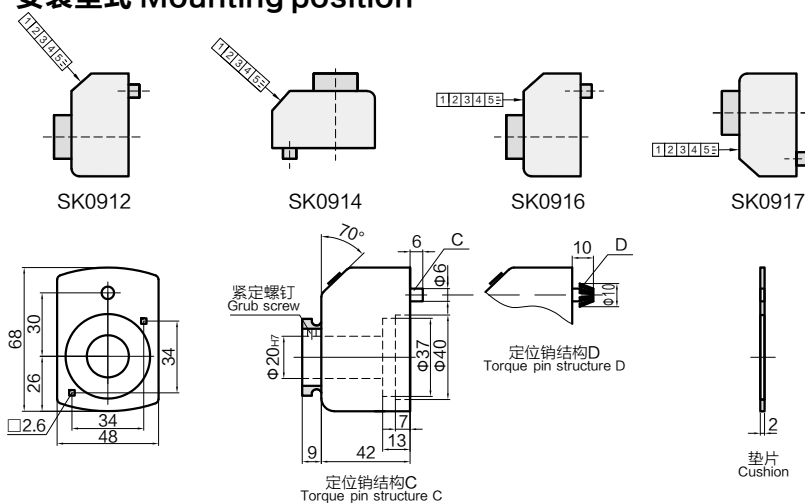


主轴轴向节距 Axial pitch	从零位开始，主轴旋转 1 圈位置显示器所显示的数据 Display after one revolution			最大速度 (转 / 分) Max speed(r/m)
1.0mm	标准数据 Norm 0001,0 ≡	或 Or 000,10 ≡	或 Or 00010 ≡	1500
1.25mm	标准数据 Norm 0001,2/5	或 Or 000,12/5	或 Or 00012/5	1200
1.5mm	标准数据 Norm 0001,5 ≡	或 Or 000,15 ≡	或 Or 00015 ≡	1000
1.75mm	标准数据 Norm 0001,7/5	或 Or 000,17/5	或 Or 00017/5	850
2.0mm	标准数据 Norm 0002,0 ≡	或 Or 000,20 ≡	或 Or 00020 ≡	750
2.5mm	标准数据 Norm 0002,5 ≡	或 Or 000,25 ≡	或 Or 00025 ≡	600
3.0mm	标准数据 Norm 0003,0 ≡	或 Or 000,30 ≡	或 Or 00030 ≡	500
4.0mm	标准数据 Norm 0004,0 ≡	或 Or 000,40 ≡	或 Or 00040 ≡	450
5.0mm	标准数据 Norm 0005,0 ≡	或 Or 000,50 ≡	或 Or 00050 ≡	300
6.0mm	标准数据 Norm 0006,0 ≡	或 Or 000,60 ≡	或 Or 00060 ≡	300
8.0mm	标准数据 Norm 0008,0 ≡	或 Or 000,80 ≡	或 Or 00080 ≡	250
10.0mm	标准数据 Norm 0010,0 ≡	或 Or 001,00 ≡	或 Or 00100 ≡	150

SK10型位置显示器 Position indicators

订购举例 Example for order:

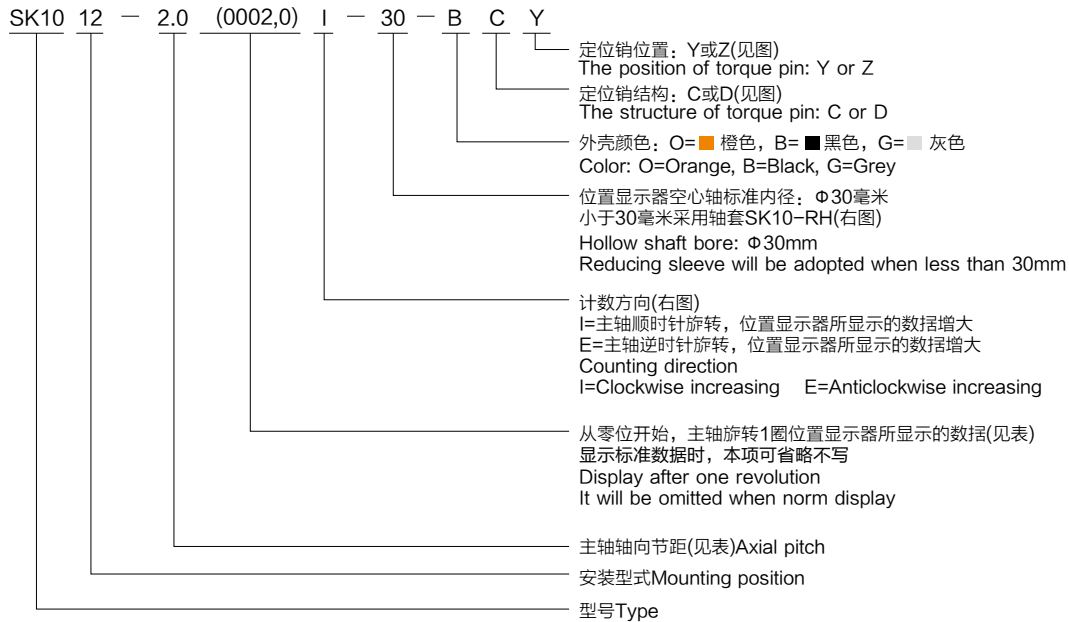

安装型式 Mounting position

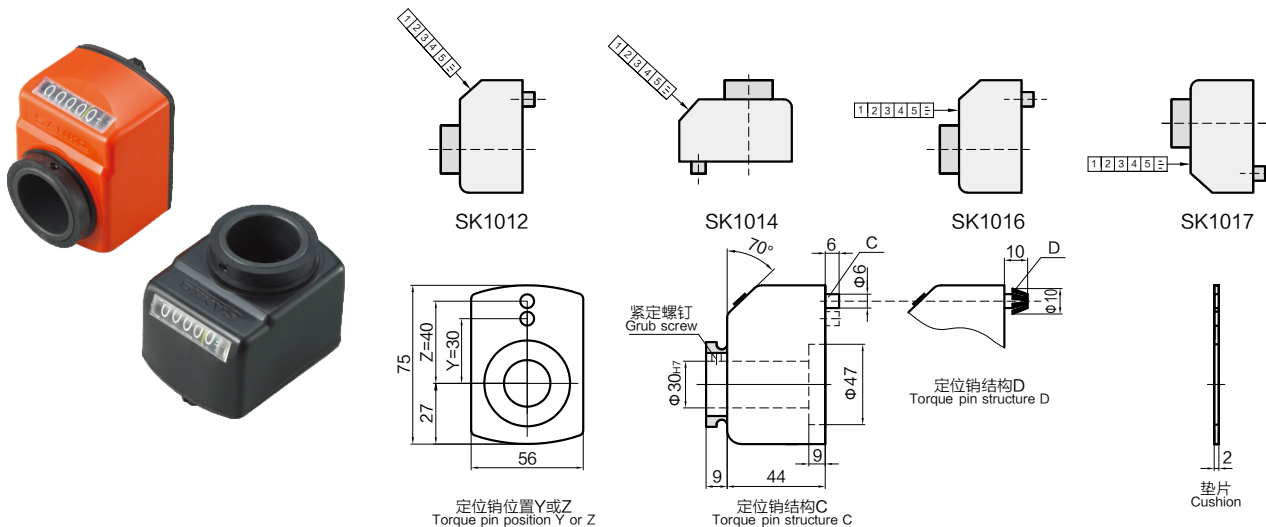

主轴轴向节距 Axial pitch	从零位开始, 主轴旋转 1 圈位置显示器所显示的数据 Display after one revolution			最大速度 (转 / 分) Max speed(r/m)
1.0mm	标准数据 Norm 0001,0	或 Or 000,10	或 Or 00010	1500
1.5mm	标准数据 Norm 0001,5	或 Or 000,15	或 Or 00015	1000
1.75mm	标准数据 Norm 0001,7/5	或 Or 000,17/5	或 Or 00017/5	850
2.0mm	标准数据 Norm 0002,0	或 Or 000,20	或 Or 00020	750
2.5mm	标准数据 Norm 0002,5	或 Or 000,25	或 Or 00025	600
3.0mm	标准数据 Norm 0003,0	或 Or 000,30	或 Or 00030	500
4.0mm	标准数据 Norm 0004,0	或 Or 000,40	或 Or 00040	450
5.0mm	标准数据 Norm 0005,0	或 Or 000,50	或 Or 00050	300
6.0mm	标准数据 Norm 0006,0	或 Or 000,60	或 Or 00060	300
8.0mm	标准数据 Norm 0008,0	或 Or 000,80	或 Or 00080	250
10.0mm	标准数据 Norm 0010,0	或 Or 001,00	或 Or 00100	150

订购举例 Example for order:

SK10-RH
軸套內徑Reducing sleeve
d=20mm



Technical drawings of the SK1012 torque pin, showing various views and dimensions.

Top View Dimensions:

- Overall Height: 75
- Base Height: 27
- Height to Center: $Z=40$
- Height to Pin Center: $Y=30$
- Width: 56

Side View Dimensions (SK1012):

- Thread Diameter: $\Phi 25$
- Flange Thickness: 9
- Base Thickness: 21
- Main Body Length: 44
- Internal Shoulder: 9
- Outer Diameter: $\Phi 47$
- Pin Length: 6
- Taper Angle: 70°
- Pin Diameter: $\Phi 6$
- Pin Diameter: $\Phi 10$

Pin Position Indicators:

- SK1012: 1 2 3 4 5 6 7
- SK1014: 1 2 3 4 5 6 7
- SK1016: 1 2 3 4 5 6 7
- SK1017: 1 2 3 4 5 6 7

Pin Structures:

- SK1012: Torque pin structure C
- SK1016: Torque pin structure D

Other Components:

- M5 紧定螺钉 Grub screw
- 垫片 Cushion

6 20250331

SK20 型位置显示器 Position indicators

订购举例 Example for order:

SK20 12 — 2.0 (R002,0/0002,0) I — 30 — B C Y

定位销位置: Y或Z(见图)
The position of torque pin: Y or Z

定位销结构: C或D(见图)
The structure of torque pin: C or D

外壳颜色: O= 橙色, B= 黑色
Color: O=Orange, B=Black

位置显示器空心轴标准内径: $\Phi 30$ 毫米
小于30毫米采用轴套SK20-RH(右图)
Hollow shaft bore: $\Phi 30$ mm
Reducing sleeve will be adopted when less than 30mm



计数方向(右图)
I=主轴顺时针旋转, 位置显示器所显示的数据增大
E=主轴逆时针旋转, 位置显示器所显示的数据增大
Counting direction
I=Clockwise increasing E=Anticlockwise increasing

从零位开始, 主轴旋转1圈位置显示器所显示的数据
Display after one revolution


主轴轴向节距Axial pitch

安装型式Mounting position

型号Type



定位销位置Y或Z
Torque pin position Y or Z

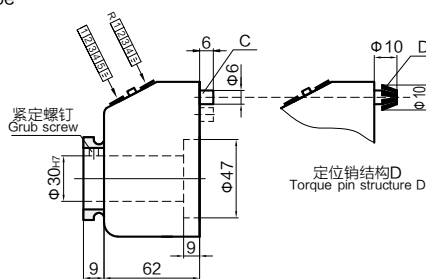


定位销结构C
Torque pin structure C

定位销结构D
Torque pin structure D

垫片
Cushion

主轴轴向节距 Axial pitch	从零位开始, 主轴旋转 1 圈位置显示器所显示的数据 Display after one revolution			最大速度 (转 / 分) Max speed(r/m)
2.0mm	标准数据 Norm 0002,0 —	或 Or 000,20 —	或 Or 00020	750

SK7330刻度微调旋钮Scale fine turning control knob

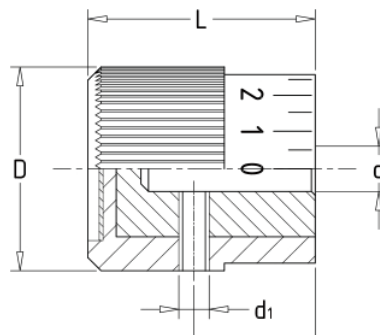

材料: 黑色塑料柄体、钢质轮毂
Material: Black nylon plastic body, Steel hub


代号 Code	规格 Description	D	d	L	L1	d1
7330130	27 × 6	27	6	32	16.5	M4
7330240	32 × 8	32	8	38	17.5	M4
7330350	35 × 10	35	10	43	19.5	M4
7330460	40 × 12	40	12	53	20.5	M4

SK60、80、100位置指示表 Position gauges


订购举例 Example for order:

SK60 R20 (0-20) DX

表盘刻度从小到方向 (见图)
DX=表盘刻度值顺时针方向从小到大
SX=表盘刻度值逆时针方向从小到大
Direction of dial scale
DX=Clockwise increasing
SX=Anticlockwise increasing
表盘刻度0-20 Dial scale from 0 to 20
传动比 Reduction ratio
R20表示传动比20: 1
R20 means the ratio is 20:1
型号Type

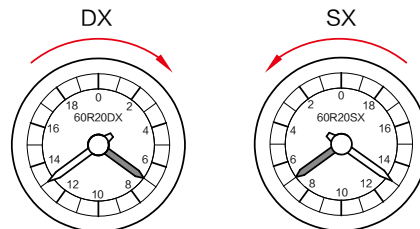

表盘刻度值从小到方向
Direction of dial scale



型号 Type	D	D1	H	B	传动比 Ratio	表盘刻度值 (标准) Dial scale(norm)
SK60	57.5	54.5	31	9.5	10:1, 12:1, 15:1, 16:1, 18:1, 20:1, 24:1, 25:1, 30:1, 36:1, 40:1, 50:1, 80:1, 100:1	0-10, 0-12, 0-15, 0-16, 0-18, 0-20, 0-24, 0-25, 0-30, 0-36, 0-40, 0-50, 0-80, 0-100
SK80	81.5	78.5	37	11.5		
SK100	107	100	36	15		

位置指示表配合手轮使用，当作刻度指示，圈数记数之用。

带位置指示表的手轮安装在水平轴上，手轮中的位置指示表能精确地显示出机件的不同位置。


表盘刻度值可以按客户要求设计、制造。

Position gauge used with handwheel, which is used in counting or indication the movement of instrument.

When handwheel is fixed to horizontal spindle, the gauge indicates different positions of spindle.

Special designs of dial scale available on request.




SK7324带表波纹手轮 Handwheels with position gauge

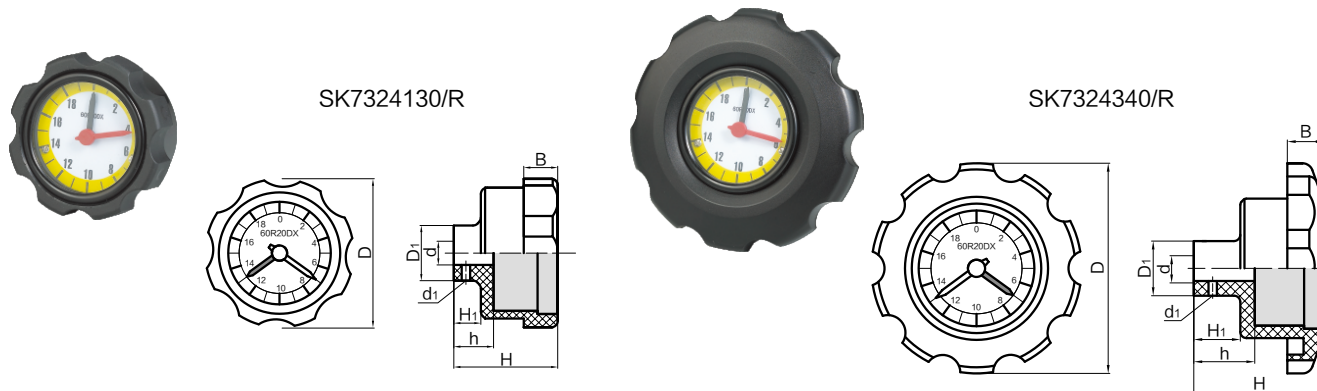

材料：黑色亚光聚酰胺 Material: Matte polyamide resin

代号 Code		规格 Description	D	d	h	H	D1	H1	d1	B
带表 With gauge	带塑盖 With cover									
7324130/60R □□□□	7324130	70 × 10	Φ70	Φ10	18	49	Φ26	14	Φ4	16
7324340/60R □□□□	7324340	110 × 12	Φ110	Φ12	19	51	Φ30	18	Φ4	17

SK7328带表平面手轮 Handwheels with position gauge

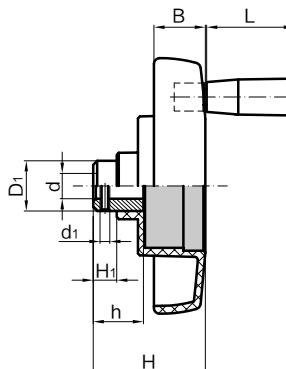

材料：黑色亚光聚酰胺、黑色氧化处理的钢质轮毂 Material: Matte polyamide resin, Black oxidation treatment steel hub
注：配 SK7010 可折手柄 Match SK7010 fold-down handles

代号 Code	规格 Description	D	d	h	H	D ₁	H ₁	d ₁	B	L	b	t
7328445/60R □□□□	133x12x50	Φ133	Φ12	27.5	61	Φ24	12	M5	26	50	4	13.8
7328666/80R □□□□	163x16x63	Φ163	Φ16	32	71	Φ32	15	M6	33	63	5	18.3





SK7360带表铝手轮 Aluminum handwheels with position gauge



SK7360H130/R





SK7360Z130/R



材料：黑色喷塑处理的铝合金 Material: Aluminum alloy
注：“H” 铝压花手轮，“Z” 铝直纹手轮 “H” knurling handwheel “Z” ruled surface handwheel



代号 Code		规格 Description	D	d	h	H	D ₁	H ₁	d ₁
带表 With gauge	带塑盖 With cover								
7360H130/60R □□□□	7360H130	65 × 10	Φ65	Φ10	22.5	54	Φ32	18	M6
7360Z130/60R □□□□	7360Z130	65 × 10	Φ65	Φ10	22.5	54	Φ32	18	M6

SK10-CV面板塞头 Panel plug

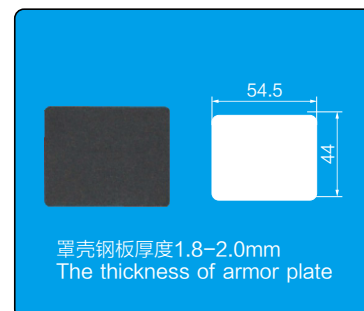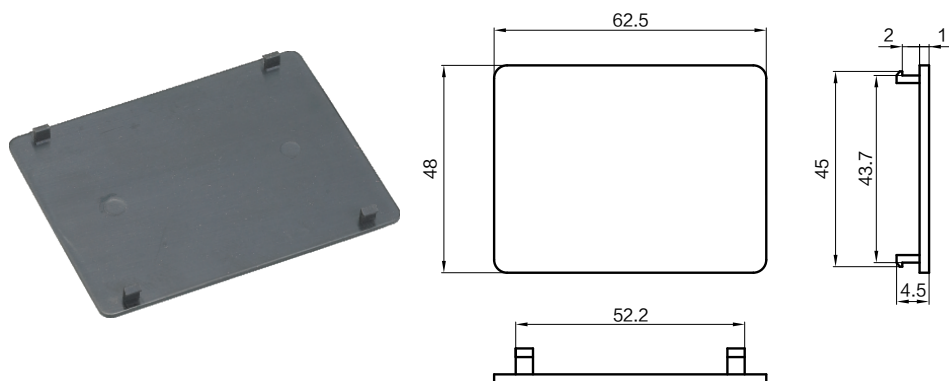


材料：黑色亚光聚酰胺
Material: Matte polyamide resin

SK10-WD面板视窗 Panel display window

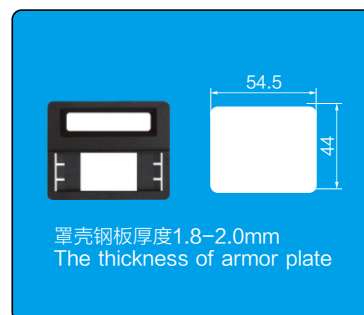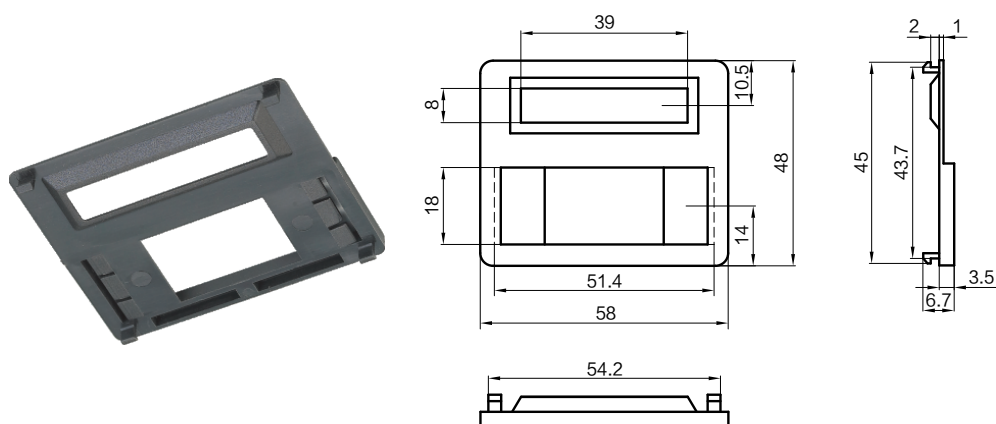

材料：黑色亚光聚酰胺
Material: Matte polyamide resin

SK7605扣式塞头Buckle type plug

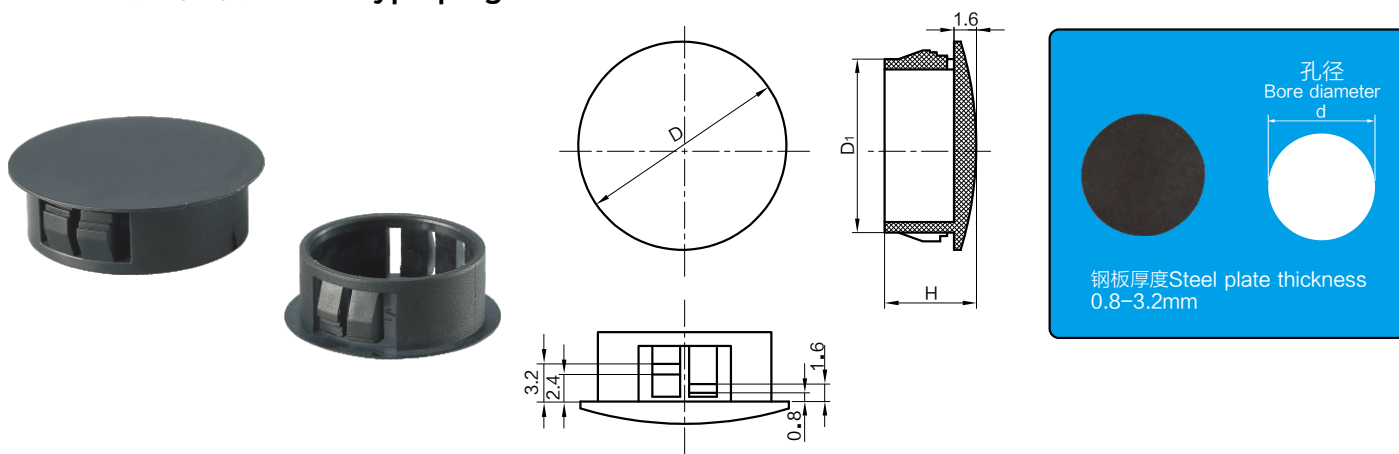


材料：黑色亚光聚酰胺 Material: Matte polyamide resin

用途：钢板预留孔或多余孔的塞头 Purpose: The plug of steel plate reserved hole or spare hole

代号 Code	规格 Description	d	D	D1	H
7605105	d8	Φ8	Φ10.5	Φ7.8	8.1
7605135	d10	Φ10	Φ13.5	Φ9.8	10.3
7605165	d13	Φ13	Φ16.5	Φ12.8	10.3
7605195	d16	Φ16	Φ19.5	Φ15.8	10.3
7605240	d20	Φ20	Φ24	Φ19.8	10.3
7605260	d22	Φ22	Φ26	Φ21.8	11.3
7605295	d25	Φ25	Φ29.5	Φ24.8	11.4
7605350	d30	Φ30	Φ35	Φ29.8	11.6

SK7607扣式塞头Buckle type plug

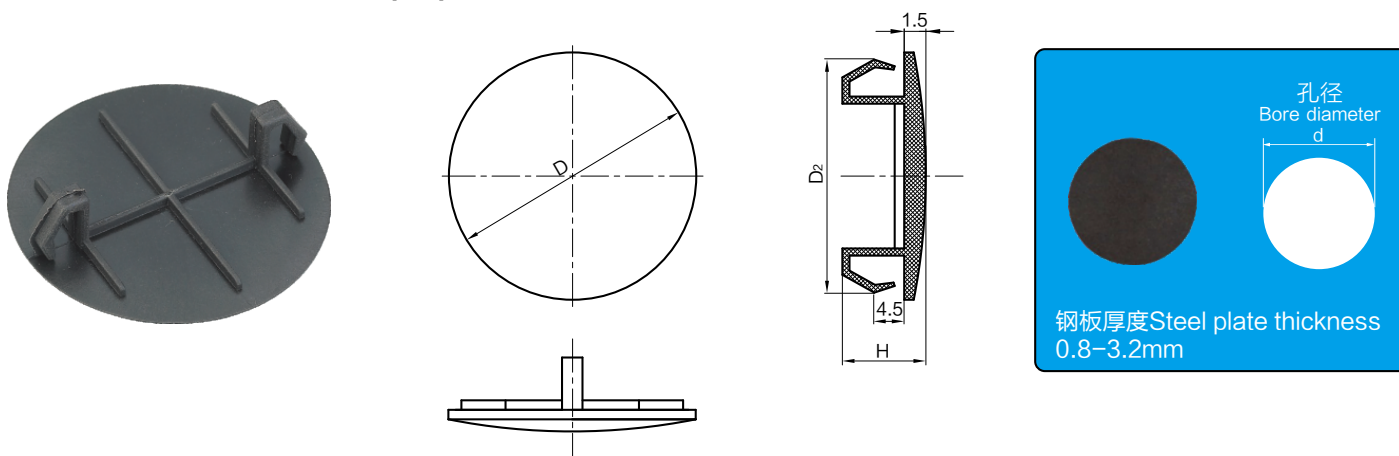


材料：黑色亚光聚酰胺 Material: Matte polyamide resin

用途：钢板预留孔或多余孔的塞头 Purpose: The plug of steel plate reserved hole or spare hole

代号 Code	规格 Description	d	D	D2	H
7607160	d10	Φ10	Φ16	Φ13.5	12.5
7607215	d16	Φ16	Φ21.5	Φ19.5	12.5
7607325	d24	Φ24	Φ32.5	Φ27.5	13
7607350	d29	Φ29	Φ35	Φ32.5	13.5
7607520	d46	Φ46	Φ52	Φ49.5	13

SK7605 扣式塞头 Buckle type plug

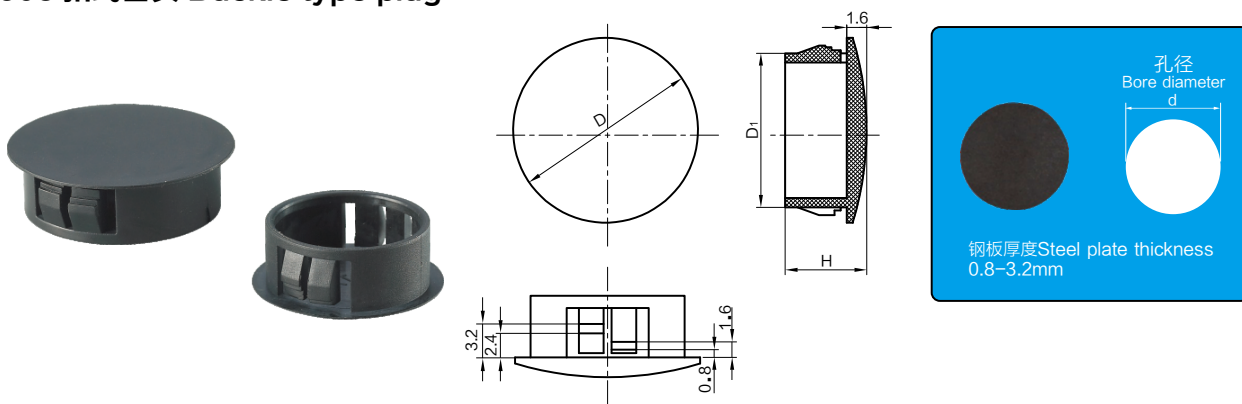

材料：黑色亚光聚酰胺


Material: Matte polyamide resin

用途：钢板预留孔或多余孔的塞头

Purpose: The plug of steel plate reserved hole or spare hole

代号 Code	规格 Description	d	D	D1	H
7605105	d8	Φ8	Φ10.5	Φ7.8	8.1
7605135	d10	Φ10	Φ13.5	Φ9.8	10.3
7605165	d13	Φ13	Φ16.5	Φ12.8	10.3
7605195	d16	Φ16	Φ19.5	Φ15.8	10.3
7605240	d20	Φ20	Φ24	Φ19.8	10.3
7605260	d22	Φ22	Φ26	Φ21.8	11.3
7605295	d25	Φ25	Φ29.5	Φ24.8	11.4
7605350	d30	Φ30	Φ35	Φ29.8	11.6

SK7607 扣式塞头 Buckle type plug

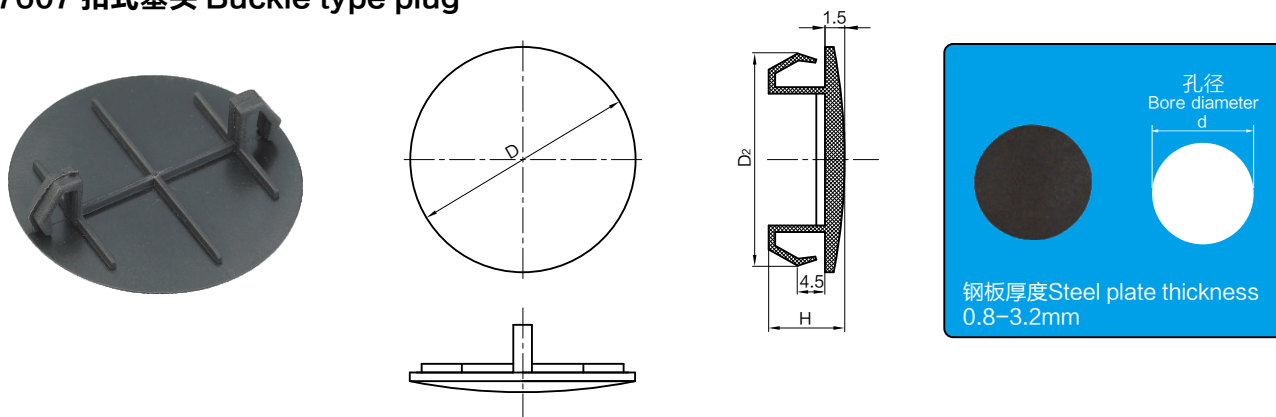

材料：黑色亚光聚酰胺


Material: Matte polyamide resin

用途：钢板预留孔或多余孔的塞头

Purpose: The plug of steel plate reserved hole or spare hole

代号 Code	规格 Description	d	D	D2	H
7607160	d10	Φ10	Φ16	Φ13.5	12.5
7607215	d16	Φ16	Φ21.5	Φ19.5	12.5
7607325	d24	Φ24	Φ32.5	Φ27.5	13
7607350	d29	Φ29	Φ35	Φ32.5	13.5
7607520	d46	Φ46	Φ52	Φ49.5	13

SK7722铰链 Zinc alloy hinges

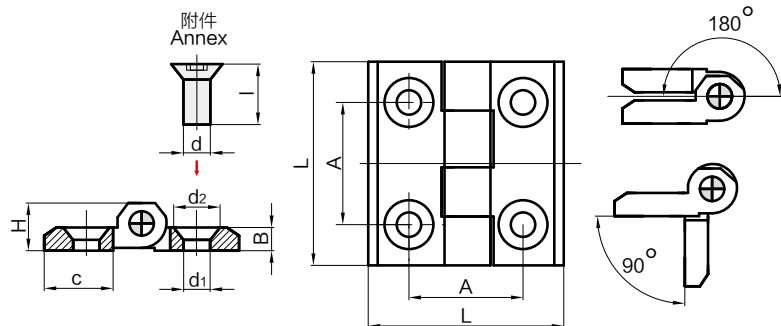


材料：黑色喷塑处理的锌合金、黑色氧化处理的钢质轴或 "SS" 不锈钢轴

Material: Zinc alloy, Black oxide treatment of steel shaft or "SS" stainless steel shaft

注：“F”带附件合金钢平头内六角螺钉 $d \times l$ “F” with annex alloy steel HEX socket head screw $d \times l$

代号 Code	规格 Description	L	$A \pm 0.25$	d_1	d_2	B	H	c	d	l
7722222F	40 × 40	40	25	$\Phi 5.5$	$\Phi 10.5$	5	9	14	M5	12
7722333F	50 × 50	50	30	$\Phi 6.5$	$\Phi 12.5$	6	11.5	18	M6	16
7722444F	60 × 60	60	36	$\Phi 8.5$	$\Phi 16.5$	8	15	21.5	M8	20
7722SS222F	40 × 40	40	25	$\Phi 5.5$	$\Phi 10.5$	5	9	14	M5	12
7722SS333F	50 × 50	50	30	$\Phi 6.5$	$\Phi 12.5$	6	11.5	18	M6	16
7722SS444F	60 × 60	60	36	$\Phi 8.5$	$\Phi 16.5$	8	15	21.5	M8	20

SK7724SS不锈钢铰链 Stainless steel hinges

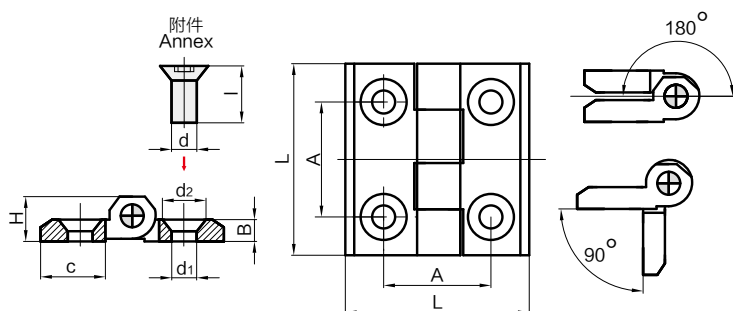


材料：SUS304 不锈钢，抛亮光表面

Material: SUS304 Stainless steel, High-polished surface

注：“F”带附件不锈钢平头内六角螺钉 $d \times l$ With annex stainless steel HEX socket head screw $d \times l$

代号 Code	规格 Description	L	$A \pm 0.25$	d_1	d_2	B	H	c	d	l	重量 g
7724SS222F	40 × 40	40	25	$\Phi 5.5$	$\Phi 10.5$	5	9	14	M5	12	45.0
7724SS333F	50 × 50	50	30	$\Phi 6.5$	$\Phi 12.5$	6	10.5	18	M6	16	92.2
7724SS444F	60 × 60	60	36	$\Phi 8.5$	$\Phi 16.5$	7.5	14	21.5	M8	20	108.3


SK7724A带螺柱锌合金铰链 Zinc alloy hinge with studs

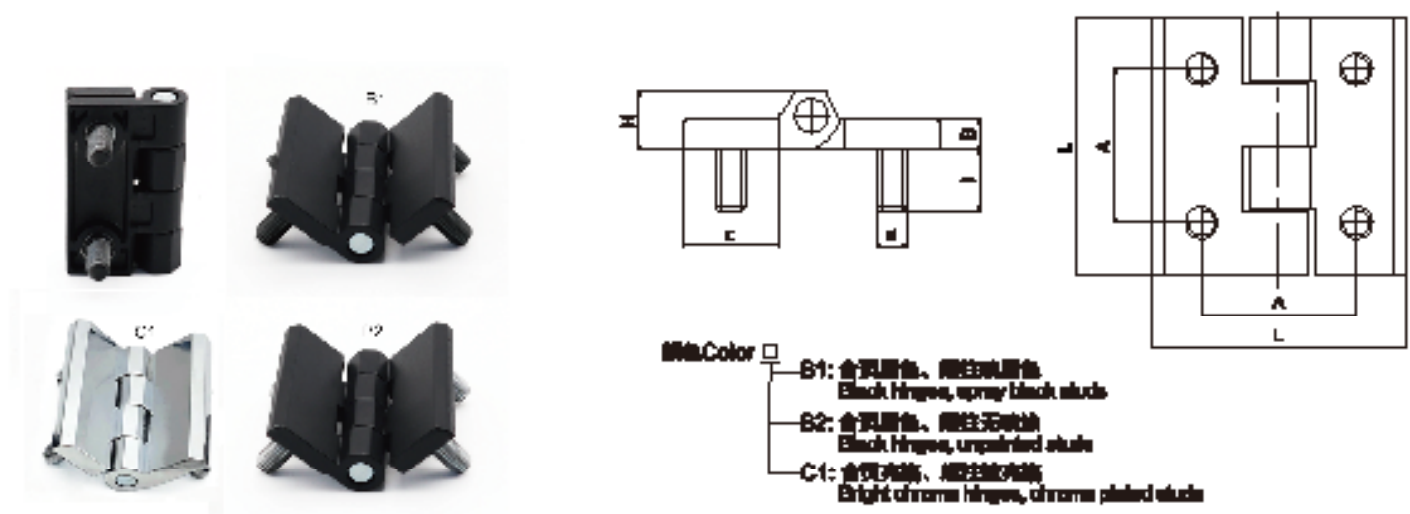

材料：锌合金的合页、钢制的螺柱、表面黑色喷塑或镀亮铬
Material: Zinc alloy, Steel studs

代号 Code	规格 Description	L	A±0.25	B	H	c	d	l	重量 g
7724A222 □	38×38	38	25	5	9	14	M5	10.5	44.0
7724A333 □	46×46	46	30	5	11.5	18	M6	12	71.3
7724A444 □	57×57	57	36	7.5	14	21.5	M8	17	168.2


SK7724ASS带螺柱不锈钢铰链 Stainless steel hinge with studs

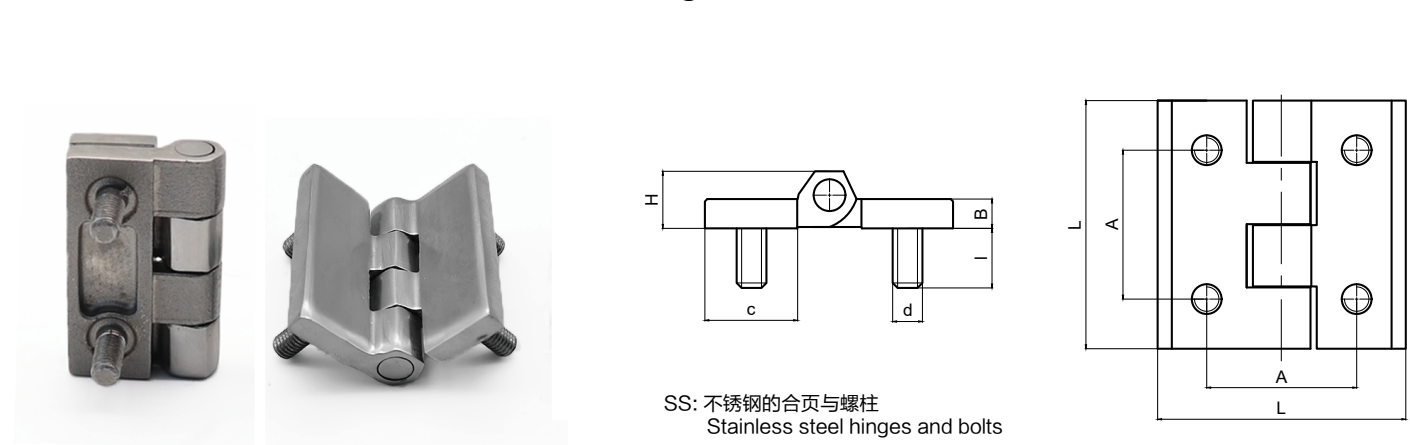

材料：不锈钢的合页与螺柱、表面抛亮光
Material: Stainless steel , High-polished surface

代号 Code	规格 Description	L	A±0.25	B	H	c	d	l	重量 g
7724ASS222	40×40	40	25	5	9	14	M5	11	63.3
7724ASS333	50×50	50	30	6	10.5	18	M6	12	
7724ASS444	60×60	60	36	8	14	21.5	M8	17	



SK7328带塑盖平面手轮 Handwheels

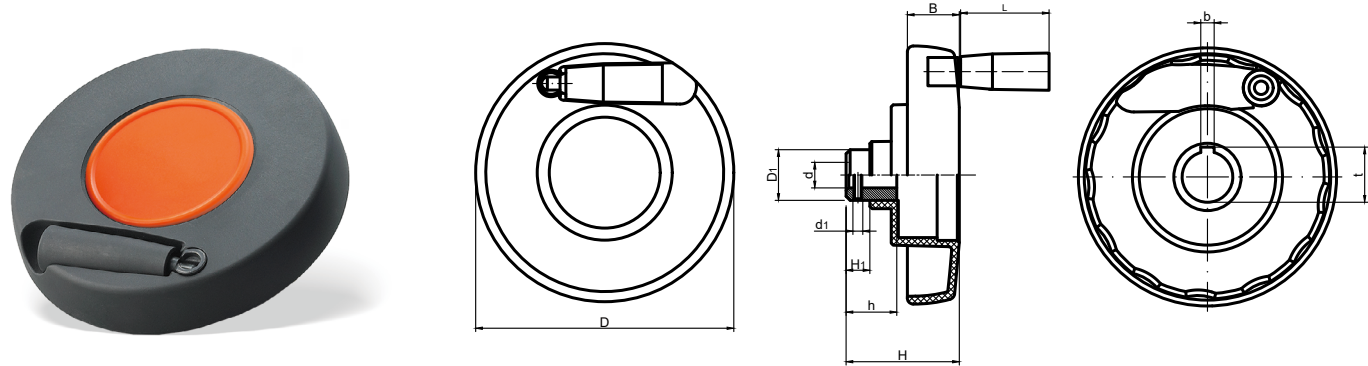

材料：黑色亚光聚酰胺、黑色氧化处理的钢质轮毂 Material: Matte polyamide resin, Black oxidation treatment steel hub
注：配 SK7010 可折手柄 Match SK7010 fold-down handles

代号 Code	规格 Description	D	d	h	H	D1	H1	d1	B	L	b	t
7328445	133x12x50	Φ133	Φ12	27.5	61	Φ24	12	M5	26	50	4	13.8
7328666	163x16x63	Φ163	Φ16	32	71	Φ32	15	M6	33	63	5	18.3

SK7310A铝双幅条手轮 Spoke handwheels

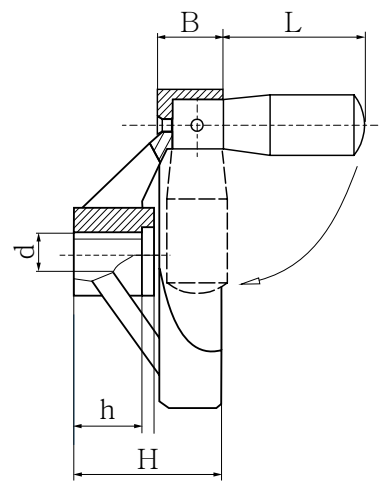
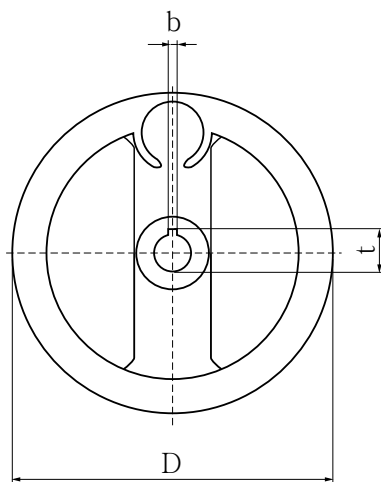


材料：黑色喷塑的铝合金 Material: Aluminum alloy

注：配可折叠手柄，需要平键请在代号中加 "F" Match fold-down handles. Please add "F" in the code if you need a flat key

代号 Code	规格 Description	D	d	h	H	B	L	b	t
7310A345	100 × 12 × 50	Φ100	Φ12	20	40	20	50	4	13.8
7310A446	125 × 12 × 63	Φ125	Φ12	20	44	22	63	4	13.8
7310A667	160 × 16 × 80	Φ160	Φ16	20	50	25	80	5	18.3
7310A877	200 × 18 × 80	Φ200	Φ18	25	56	28	90	6	20.8

SK7310P尼龙双幅条手轮 Spoke handwheels

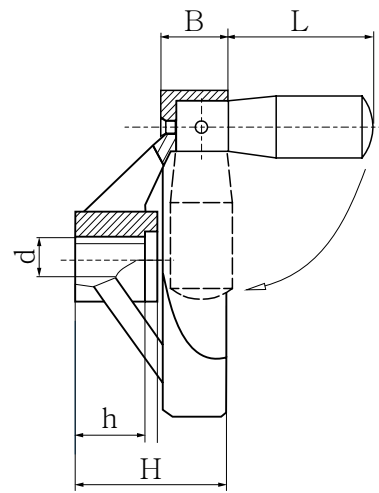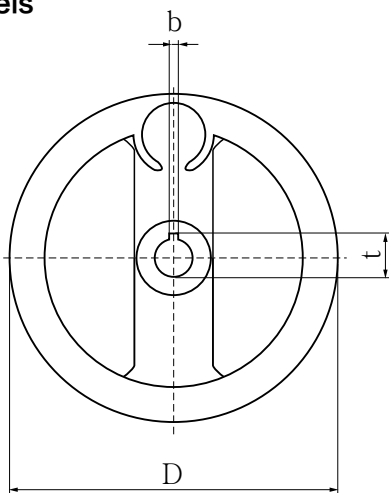


材料：黑色亚光聚酰胺，铸铝轮毂

Material: Matte polyamide resin, Zinc alloy hub

注：配可折叠手柄，需要平键请在代号中加 "F" Match fold-down handles. Please add "F" in the code if you need a flat key

代号 Code	规格 Description	D	d	h	H	B	L	b	t
7310P345	100 × 12 × 50	Φ100	Φ12	20	40	20	50	4	13.8
7310P446	125 × 12 × 63	Φ125	Φ12	20	44	22	63	4	13.8
7310P667	160 × 16 × 80	Φ160	Φ16	20	50	25	80	5	18.3
7310P877	200 × 18 × 80	Φ200	Φ18	25	56	28	90	6	20.8

SK7303方轮缘手轮 Square rim handwheels

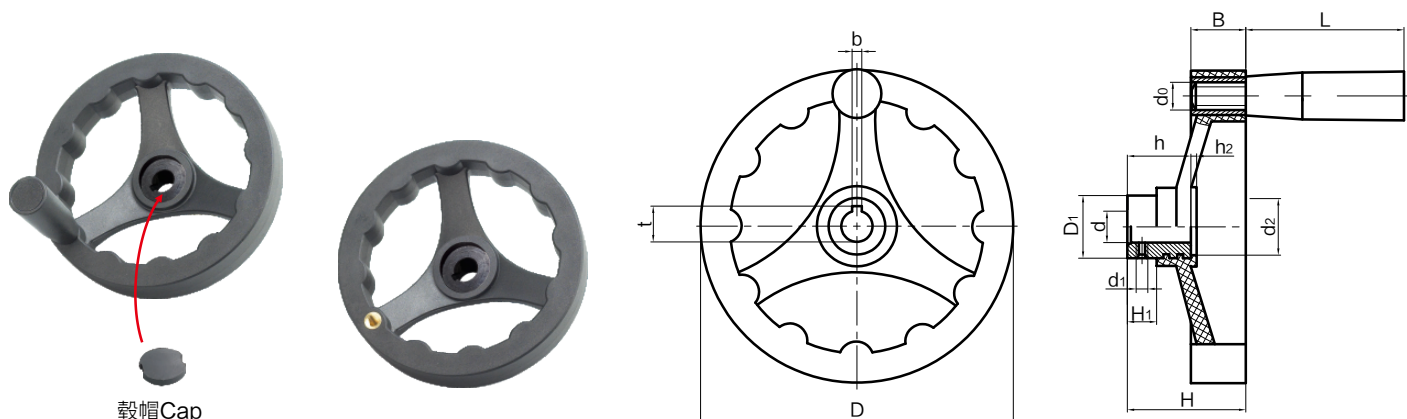

毂帽Cap


材料：黑色亚光聚酰胺、黑色氧化处理的钢质轮毂、黑色亚光聚酰胺毂帽

Material: Matte polyamide resin, Black oxidation treatment steel hub, Matte polyamide resin cap

注：配 SK7005 转动手柄 Match SK7005 revolving handles

代号 Code		规格 Description	D	d	h	H	D1	H1	d1	B	d0	L	b	t	d2	h2
不带手柄 Without handles	带手柄 With handles															
7303340	—	100 × 12	Φ100	Φ12	23.5	45	Φ24	12	M5	20	M6		4	13.8	18	4
—	7303345	100 × 12 × 50	Φ100	Φ12	23.5	45	Φ24	12	M5	20	M6	50	4	13.8	18	4
7303440	—	125 × 12	Φ125	Φ12	27.5	50	Φ24	12	M5	23.5	M8		4	13.8	22	4
—	7303446	125 × 12 × 63	Φ125	Φ12	27.5	50	Φ24	12	M5	23.5	M8	63	4	13.8	22	4
7303660	—	160 × 16	Φ160	Φ16	32	60	Φ32	15	M6	27.5	M10		5	18.3	28	5
—	7303667	160 × 16 × 80	Φ160	Φ16	32	60	Φ32	15	M6	27.5	M10	80	5	18.3	28	5
7303870	—	200 × 18	Φ200	Φ18	39	73	Φ40	15	M8	31	M10		6	20.8	36	6
—	7303877	200 × 18 × 80	Φ200	Φ18	39	73	Φ40	15	M8	31	M10	80	6	20.8	36	6

SK7304方轮缘手轮 Square rim handwheels

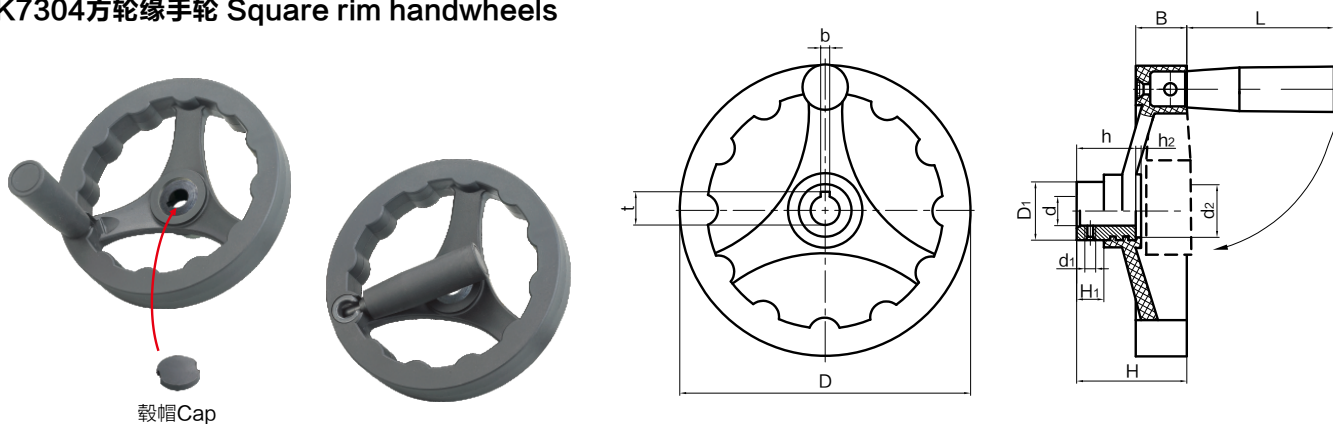

毂帽Cap


材料：黑色亚光聚酰胺、黑色氧化处理的钢质轮毂、黑色亚光聚酰胺毂帽

Material: Matte polyamide resin, Black oxidation treatment steel hub, Matte polyamide resin cap

注：配 SK7010 可折手柄 Match SK7010 fold-down handles

代号 Code	规格 Description	D	d	h	H	D1	H1	d1	B	L	b	t	d2	h2
7304345	100 × 12 × 50	Φ100	Φ12	23.5	45	Φ24	12	M5	20	50	4	13.8	18	4
7304445	125 × 12 × 50	Φ125	Φ12	27.5	50	Φ24	12	M5	24	50	4	13.8	22	4
7304666	160 × 16 × 63	Φ160	Φ16	32	60	Φ32	15	M6	28	63	5	18.3	28	5
7304877	200 × 18 × 80	Φ200	Φ18	39	73	Φ40	15	M8	31	80	6	20.8	36	6


SK7302小手轮 Little handwheels

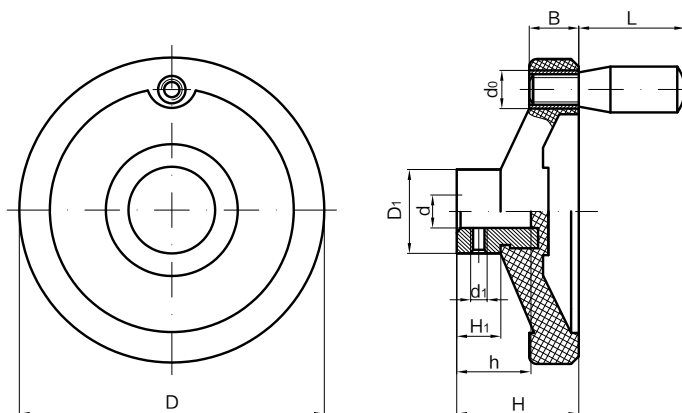

材料：黑色亮光热固性塑料、黑色氧化处理的钢质轮毂
Material: Duroplast, Black oxidation treatment steel hub
注：配 SK7002 小手柄 Match SK7002 little handles

代号 Code		规格 Description	D	d	h	H	D ₁	H ₁	d ₁	B	d ₀	L
不带手柄 Without handles	带小手柄 With handles											
7302230		80x10	Φ80	Φ10	16	32	Φ22	12	M5	12	M6	
	7302232	80x10x25	Φ80	Φ10	16	32	Φ22	12	M5	12	M6	25
7302340		100x12	Φ100	Φ12	18	36	Φ28	13	M6	14	M6	
	7302343	100x12x32	Φ100	Φ12	18	36	Φ28	13	M6	14	M6	32
7302440		125x12	Φ125	Φ12	20	40	Φ28	14	M6	16	M6	
	7302444	125x12x40	Φ125	Φ12	20	40	Φ28	14	M6	16	M6	40



SK7305圆轮缘手轮 Circular rim handwheels

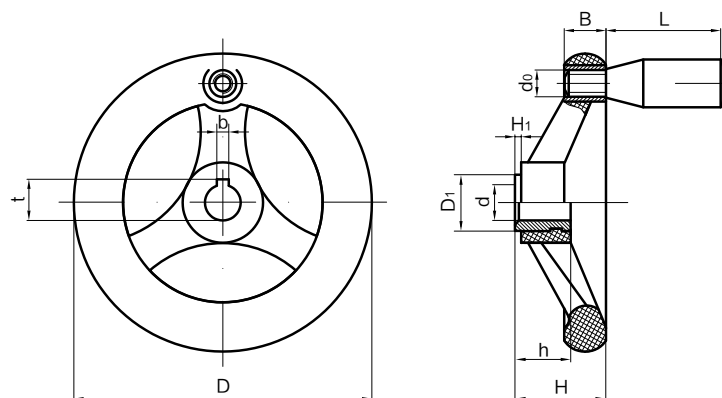

材料：黑色亮光热固性塑料、黑色氧化处理的钢质轮毂
Material: Duroplast, Black oxidation treatment steel hub
注：配 SK7006 转动手柄 Match SK7006 revolving handles

代号 Code		规格 Description	D	d	h	H	D ₁	H ₁	B	d ₀	L	b	t
不带手柄 Without handles	带手柄 With handles												
7305340		100x12	Φ100	Φ12	18	30	Φ20	0.5	16	M6		4	13.8
	7305345	100x12x50	Φ100	Φ12	18	30	Φ20	0.5	16	M6	50	4	13.8

SK7307D短轴内波纹手轮 Short insert inner corrugated handwheels

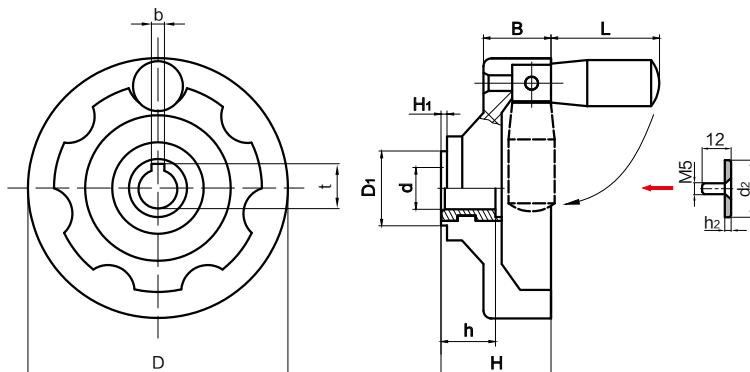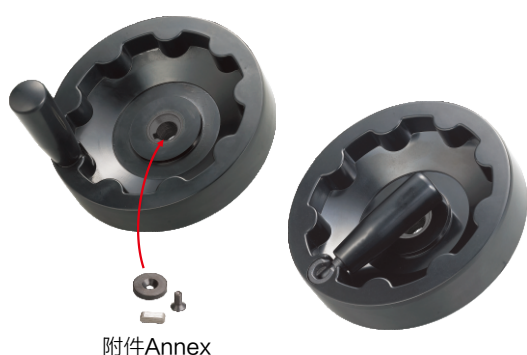

材料：黑色亮光热固性塑料、黑色氧化处理的钢质轮毂


Material: Duroplast, Black oxidation treatment steel hub

注：配 SK7011 可折手柄 Match SK7011 fold-down handles

“F” 带附件轴端挡圈、平键、平头内六角螺钉 “F” with annex washers, carbon steel flat keys, counter sunk screw

代号 Code	Description	D	d	h	H	D ₁	H ₁	B	L	b	t	d ₂	h ₂
7307D345F	100 × 12 × 50	Φ100	Φ12	18	42	Φ25	1.5	26	50	4	13.8	Φ20	4
7307D446F	125 × 12 × 63	Φ125	Φ12	18	43	Φ28	1.5	30	63	4	13.8	Φ20	4
7307D667F	160 × 16 × 80	Φ160	Φ16	20	50	Φ32	1.5	32	80	5	18.3	Φ22	4
7307D877F	200 × 18 × 80	Φ200	Φ18	25	55	Φ36	1.5	34	80	6	20.8	Φ25	4

SK7307L长轴内波纹手轮 Long insert inner corrugated handwheels

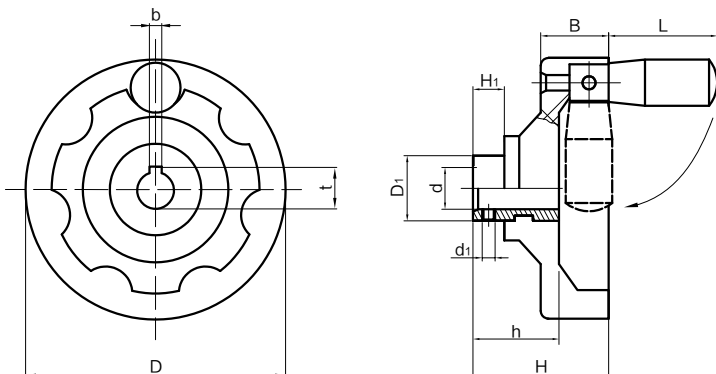

材料：黑色亮光热固性塑料、黑色氧化处理的钢质轮毂

Material: Duroplast, Black oxidation treatment steel hub

注：配 SK7011 可折手柄 Match SK7011 fold-down handles


“F” 带附件轴端挡圈、平键、平头内六角螺钉 “F” with annex washers, carbon steel flat keys, counter sunk screw

代号 Code	规格 Description	D	d	h	H	D ₁	H ₁	d ₁	B	L	b	t	h ₂
7307L345	100x12x50	Φ100	Φ12	33	52	Φ25	12	M5	26	50	4	13.8	4
7307L446	125x12x63	Φ125	Φ12	35	56	Φ28	15	M5	30	63	4	13.8	4
7307L667	160x16x80	Φ160	Φ16	38	62	Φ32	15	M6	32	80	5	18.3	4
7307L877	200x18x80	Φ200	Φ18	43	66	Φ36	15	M8	34	80	6	20.8	4

SK7950分度销 Indexing plungers



SS: 不锈钢材质
Stainless steel

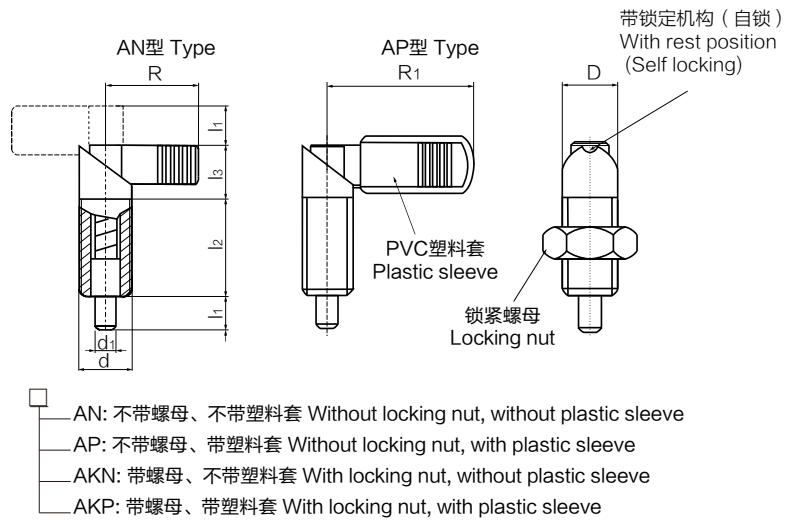

材料: 黑色碳钢或 SUS303 不锈钢的主体、螺母与销, SUS304 的弹簧, 黑色塑料把手套, 细牙螺纹



Material: Black carbon steel or SUS303 main body, nut and pin. SUS304 spring. Black plastic sleeve. Fine thread

代号 Code	规格 Description	R	d	d ₁	l ₁	D	l ₂ +1.5	l ₃	R ₁	Load/N
7950453 □	M10×1.0-4×6	21	M10×1.0	Φ4	6	Φ10	19	12.5	-	7~20
7950454 □	M10×1.0-5×6	21	M10×1.0	Φ5	6	Φ10	19	12.5	-	7~20
7950455 □	M10×1.0-6×6	21	M10×1.0	Φ6	6	Φ10	19	12.5	-	7~20
7950564 □	M12×1.5-5×8	26	M12×1.5	Φ5	8	Φ12	26	13	32	9~21
7950565 □	M12×1.5-6×8	26	M12×1.5	Φ6	8	Φ12	26	13	32	9~21
7950567 □	M12×1.5-8×8	26	M12×1.5	Φ8	8	Φ12	26	13	32	9~21
7950785 □	M16×1.5-6×10	32	M16×1.5	Φ6	10	Φ16	30	16	42	12~32
7950787 □	M16×1.5-8×10	32	M16×1.5	Φ8	10	Φ16	30	16	42	12~32
7950788 □	M16×1.5-10×10	32	M16×1.5	Φ10	10	Φ16	30	16	42	12~32
7950897 □	M20×1.5-8×12	37	M20×1.5	Φ8	12	Φ20	36	21	52	21~58
7950898 □	M20×1.5-10×12	37	M20×1.5	Φ10	12	Φ20	36	21	52	21~58
7950899 □	M20×1.5-12×12	37	M20×1.5	Φ12	12	Φ20	36	21	52	21~58
7950SS453 □	M10×1.0-4×6	21	M10×1.0	Φ4	6	Φ10	19	12.5	-	7~20
7950SS454 □	M10×1.0-5×6	21	M10×1.0	Φ5	6	Φ10	19	12.5	-	7~20
7950SS455 □	M10×1.0-6×6	21	M10×1.0	Φ6	6	Φ10	19	12.5	-	7~20
7950SS564 □	M12×1.5-5×8	26	M12×1.5	Φ5	8	Φ12	26	13	32	9~21
7950SS565 □	M12×1.5-6×8	26	M12×1.5	Φ6	8	Φ12	26	13	32	9~21
7950SS567 □	M12×1.5-8×8	26	M12×1.5	Φ8	8	Φ12	26	13	32	9~21
7950SS785 □	M16×1.5-6×10	32	M16×1.5	Φ6	10	Φ16	30	16	42	12~32
7950SS787 □	M16×1.5-8×10	32	M16×1.5	Φ8	10	Φ16	30	16	42	12~32
7950SS788 □	M16×1.5-10×10	32	M16×1.5	Φ10	10	Φ16	30	16	42	12~32
7950SS897 □	M20×1.5-8×12	37	M20×1.5	Φ8	12	Φ20	36	21	52	21~58
7950SS898 □	M20×1.5-10×12	37	M20×1.5	Φ10	12	Φ20	36	21	52	21~58
7950SS899 □	M20×1.5-12×12	37	M20×1.5	Φ12	12	Φ20	36	21	52	21~58

SK7960分度销(自复) Indexing plungers (Self resetting)



☐ A: 不带锁紧螺母
Without locking nut
☐ AK: 带锁紧螺母
With locking nut
 SS: 不锈钢材质
Stainless steel

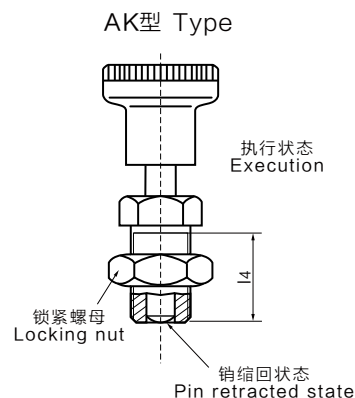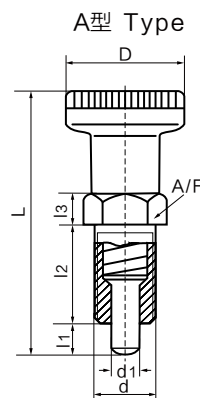

材料: 黑色亚光聚酰胺旋钮, 黑色碳钢或 SUS303 的主体、螺母与销, SUS304 的弹簧, 细牙螺纹



Material: Polyamide resin knob. Black carbon steel or SUS303 main body, nut and pin. SUS304 spring. Fine thread

代号 Code	规格 Description	D	d	d1	l1	L	l2	l3	l4	Load/N
7960454 □	M10 × 1.0-5 × 5	Φ21	M10 × 1.0	Φ5	5	45	17	5	15	7~17
7960565 □	M12 × 1.5-6 × 6	Φ25	M12 × 1.5	Φ6	6	54.5	20	6	17	9~24
7960787 □	M16 × 1.5-8 × 8	Φ31	M16 × 1.5	Φ8	8	69	26	8	23	11~30
7960799 □	M20 × 1.5-10 × 10	Φ31	M20 × 1.5	Φ10	10	80	33	10	30	45~100
7960SS454 □	M10 × 1.0-5 × 5	Φ21	M10 × 1.0	Φ5	5	45	17	5	15	7~17
7960SS565 □	M12 × 1.5-6 × 6	Φ25	M12 × 1.5	Φ6	6	54.5	20	6	17	9~24
7960SS787 □	M16 × 1.5-8 × 8	Φ31	M16 × 1.5	Φ8	8	69	26	8	23	11~30
7960SS799 □	M20 × 1.5-10 × 10	Φ31	M20 × 1.5	Φ10	10	80	33	10	30	45~100

SK7960L分度销(自锁) Indexing plungers (Self locking)



☐ A: 不带锁紧螺母
Without locking nut
☐ AK: 带锁紧螺母
With locking nut

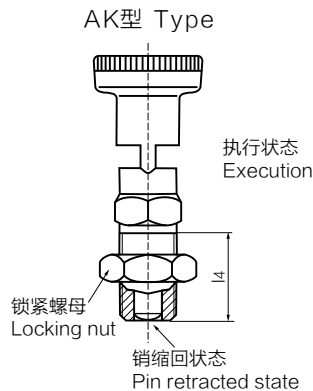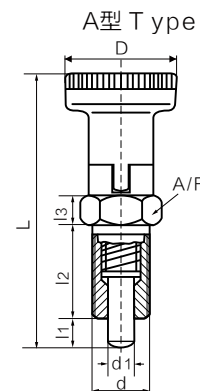

材料: 黑色亚光聚酰胺旋钮, 黑色碳钢或 SUS303 的主体、螺母与销, SUS304 的弹簧, 细牙螺纹


Material: Polyamide resin knob. Black carbon steel or SUS303 main body, nut and pin. SUS304 spring. Fine thread

代号 Code	规格 Description	D	d	d1	l1	L	l2	l3	l4	Load/N
7960L454 □	M10 × 1.0-5 × 5	Φ21	M10 × 1.0	Φ5	5	51	17	5	15	7~17
7960L565 □	M12 × 1.5-6 × 6	Φ25	M12 × 1.5	Φ6	6	61	20	6	17	9~24
7960L787 □	M16 × 1.5-8 × 7	Φ31	M16 × 1.5	Φ8	7	75.5	26	8	23	11~30
7960L799 □	M20 × 1.5-10 × 10	Φ31	M20 × 1.5	Φ10	10	91	33	10	30	45~100
7960LSS454 □	M10 × 1.0-5 × 5	Φ21	M10 × 1.0	Φ5	5	51	17	5	15	7~17
7960LSS565 □	M12 × 1.5-6 × 6	Φ25	M12 × 1.5	Φ6	6	61	20	6	17	9~24
7960LSS787 □	M16 × 1.5-8 × 7	Φ31	M16 × 1.5	Φ8	7	75.5	26	8	23	11~30
7960LSS799 □	M20 × 1.5-10 × 10	Φ31	M20 × 1.5	Φ10	10	91	33	10	30	45~100

SK7961分度销(自复) Indexing plungers (Self resetting)



- A: 不带锁紧螺母
Without locking nut
- AK: 带锁紧螺母
With locking nut
- SS: 不锈钢材质
Stainless steel

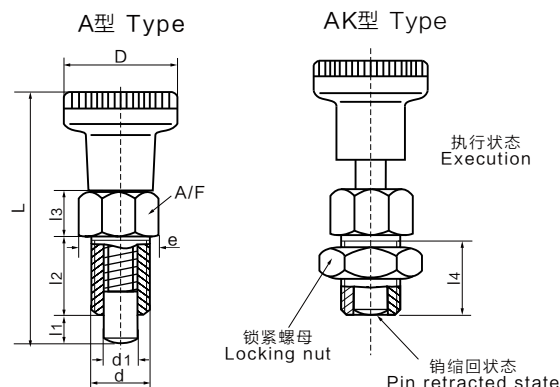


材料: 黑色亚光聚酰胺旋钮, 镀锌碳钢或 SUS303 不锈钢的主体、螺母、销, SUS304 的弹簧, 粗牙螺纹
Material: Polyamide resin knob. Zinc plated carbon steel or SUS303 main body, nut, pin, spring. Coarse thread.

代号 Code	规格 Description	D	d	d ₁	l ₁	L	l ₂	l ₃	e	l ₄	Load/N
7961133 □	M6 × 1.0-4 × 4	Φ12	M6 × 1.0	Φ4	4	30.5	12	4.5	6.9	10	3~12
7961244 □	M8 × 1.25-5 × 5	Φ16	M8 × 1.25	Φ5	5	40	16	6	9.2	13.5	5~24
7961355 □	M10 × 1.5-6 × 6	Φ18	M10 × 1.5	Φ6	6	49	20	7.5	11.5	17	5~21
7961467 □	M12 × 1.75-8 × 8	Φ21	M12 × 1.75	Φ8	8	59	24	9	13.8	20.5	6~22
7961SS133 □	M6 × 1.0-4 × 4	Φ12	M6 × 1.0	Φ4	4	30.5	12	4.5	6.9	10	3~12
7961SS244 □	M8 × 1.25-5 × 5	Φ16	M8 × 1.25	Φ5	5	40	16	6	9.2	13.5	5~24
7961SS355 □	M10 × 1.5-6 × 6	Φ18	M10 × 1.5	Φ6	6	49	20	7.5	11.5	17	5~21
7961SS467 □	M12 × 1.75-8 × 8	Φ21	M12 × 1.75	Φ8	8	59	24	9	13.8	20.5	6~22

SK7961L分度销(自锁) Indexing plungers (Self locking)




- A: 不带锁紧螺母
Without locking nut
- AK: 带锁紧螺母
With locking nut
- SS: 不锈钢材质
Stainless steel

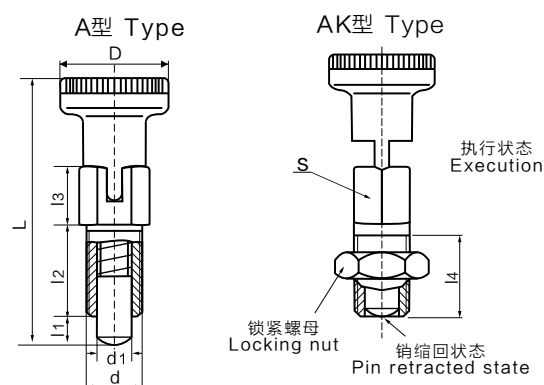

材料: 黑色亚光聚酰胺旋钮, 镀锌碳钢或 SUS303 不锈钢的主体、螺母、销, SUS304 的弹簧, 粗牙螺纹
Material: Polyamide resin knob. Zinc plated carbon steel or SUS303 main body, nut, pin, spring. Coarse thread.

代号 Code	规格 Description	D	d	d ₁	l ₁	L	l ₂	l ₃	S	l ₄	Load/N
7961L133 □	M6 × 1.0-4 × 4	Φ12	M6 × 1.0	Φ4	4	33	12	7	6	10	3~12
7961L244 □	M8 × 1.25-5 × 5	Φ16	M8 × 1.25	Φ5	5	43.5	16	9.5	8	13.5	5~24
7961L355 □	M10 × 1.5-6 × 6	Φ18	M10 × 1.5	Φ6	6	52	20	10.5	10	17	5~21
7961L467 □	M12 × 1.75-8 × 8	Φ21	M12 × 1.75	Φ8	8	63.5	24	13.5	12	20.5	6~22
7961LSS133 □	M6 × 1.0-4 × 4	Φ12	M6 × 1.0	Φ4	4	33	12	7	6	10	3~12
7961LSS244 □	M8 × 1.25-5 × 5	Φ16	M8 × 1.25	Φ5	5	43.5	16	9.5	8	13.5	5~24
7961LSS355 □	M10 × 1.5-6 × 6	Φ18	M10 × 1.5	Φ6	6	52	20	10.5	10	17	5~21
7961LSS467 □	M12 × 1.75-8 × 8	Φ21	M12 × 1.75	Φ8	8	63.5	24	13.5	12	20.5	6~22

SK7981长销带法兰座分度销(自复) Long pin indexing plungers with flange (Self resetting)

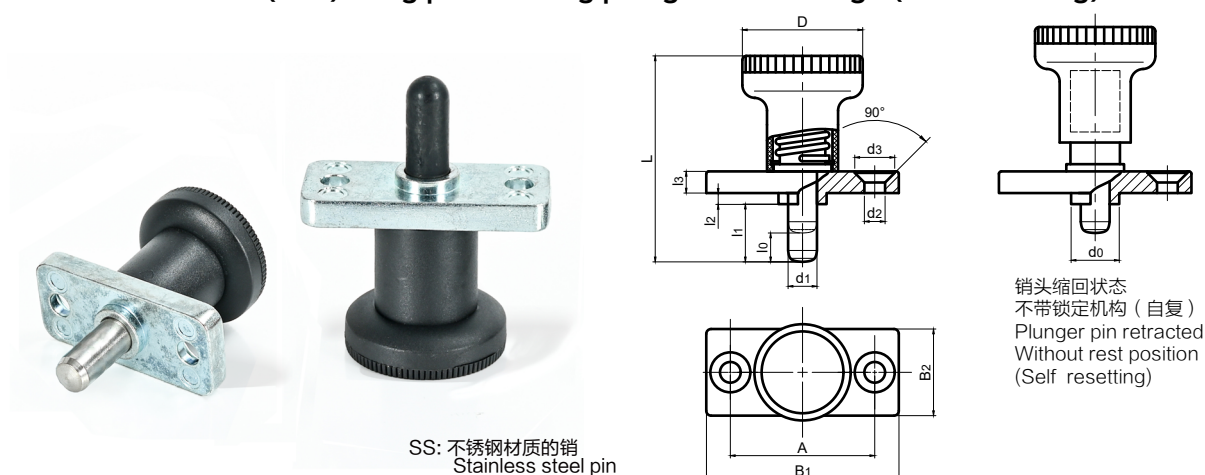


材料: 黑色亚光聚酰胺旋钮, 主体和法兰为镀蓝锌的锌合金, 黑色碳钢或 SUS303 的销, SUS304 的弹簧。

Material: Polyamide resin knob, Main body and flange blue zinc plated zinc alloy, Black carbon steel or SUS303 pin, SUS304 spring.

代号 Code	规格 Description	D	A	d1	l1	B1	B2	l0	l2	l3	L	d0	d2	d3
7981535	30-6 × 14	Φ25	30	Φ6	14	40	18	6	2.5	4.5	45	Φ10	Φ4.3	Φ8.3
7981747	34-8 × 18	Φ31	34	Φ8	18	46	20	8	2.5	4.5	54	Φ12	Φ5.3	Φ10.4
7981SS535	30-6 × 14	Φ25	30	Φ6	14	40	18	6	2.5	4.5	45	Φ10	Φ4.3	Φ8.3
7981SS747	34-8 × 18	Φ31	34	Φ8	18	46	20	8	2.5	4.5	54	Φ12	Φ5.3	Φ10.4

SK7981L长销带法兰座分度销(自锁) Long pin indexing plungers with flange (Self locking)

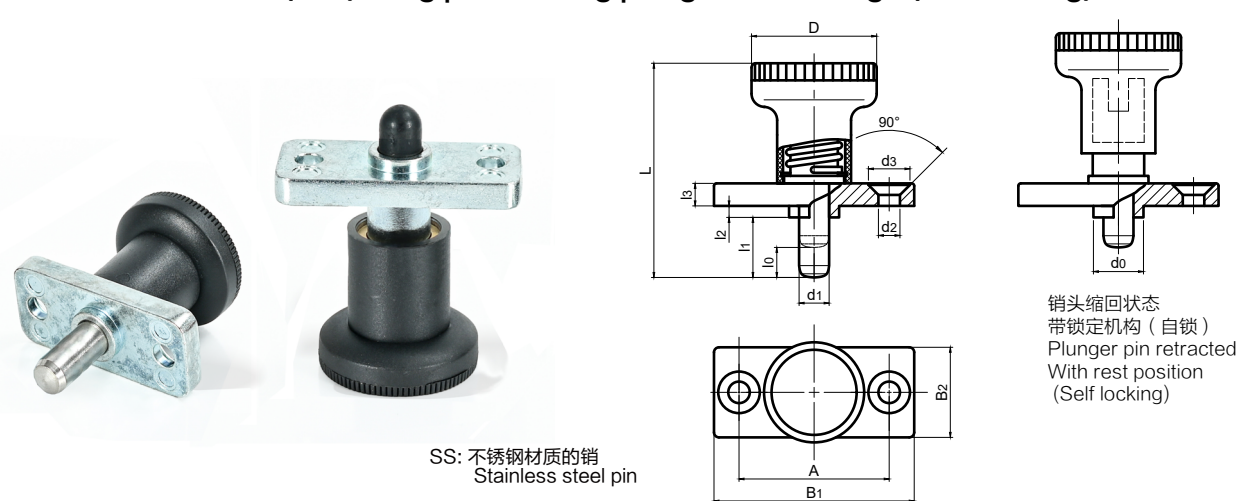


材料: 黑色亚光聚酰胺旋钮, 无螺纹, 主体和法兰为镀蓝锌的锌合金, 黑色碳钢或 SUS303 的销, SUS304 的弹簧。

Material: Polyamide resin knob, Main body and flange blue zinc plated zinc alloy, Black carbon steel or SUS303 pin, SUS304 spring

代号 Code	规格 Description	D	A	d1	l1	B1	B2	l0	l2	l3	L	d0	d2	d3
7981L535	30-6 × 14	Φ25	30	Φ6	14	40	18	6	2.5	4.5	45	Φ10	Φ4.3	Φ8.3
7981L747	34-8 × 18	Φ31	34	Φ8	18	46	20	8	2.5	4.5	54	Φ12	Φ5.3	Φ10.4
7981LSS535	30-6 × 14	Φ25	30	Φ6	14	40	18	6	2.5	4.5	45	Φ10	Φ4.3	Φ8.3
7981LSS747	34-8 × 18	Φ31	34	Φ8	18	46	20	8	2.5	4.5	54	Φ12	Φ5.3	Φ10.4

SK7982短销带法兰座分度销(自复) Short pin indexing plungers with flange (Self resetting)

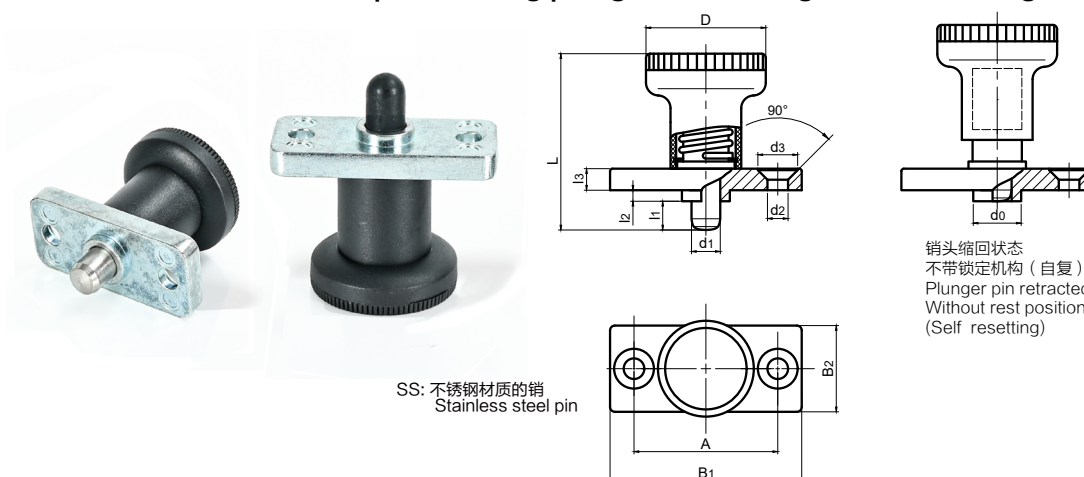


材料: 黑色亚光聚酰胺旋钮, 主体和法兰为镀蓝锌的锌合金, 黑色碳钢或 SUS303 的销, SUS304 的弹簧。

Material: Polyamide resin knob, Main body and flange blue zinc plated zinc alloy, Black carbon steel or SUS303 pin, SUS304 spring.

代号 Code	规格 Description	D	A	d1	l1	B1	B2	L	l2	l3	d0	d2	d3
7982535	30-6×6	Φ25	30	Φ6	6	40	18	37	2.5	4.5	Φ10	Φ4.3	Φ8.3
7982747	34-8×8	Φ31	34	Φ8	8	46	20	44	2.5	4.5	Φ12	Φ5.3	Φ10.4
7982SS535	30-6×6	Φ25	30	Φ6	6	40	18	37	2.5	4.5	Φ10	Φ4.3	Φ8.3
7982SS747	34-8×8	Φ31	34	Φ8	8	46	20	44	2.5	4.5	Φ12	Φ5.3	Φ10.4

SK7982L短销带法兰座分度销(自锁) Short pin indexing plungers with flange (Self locking)

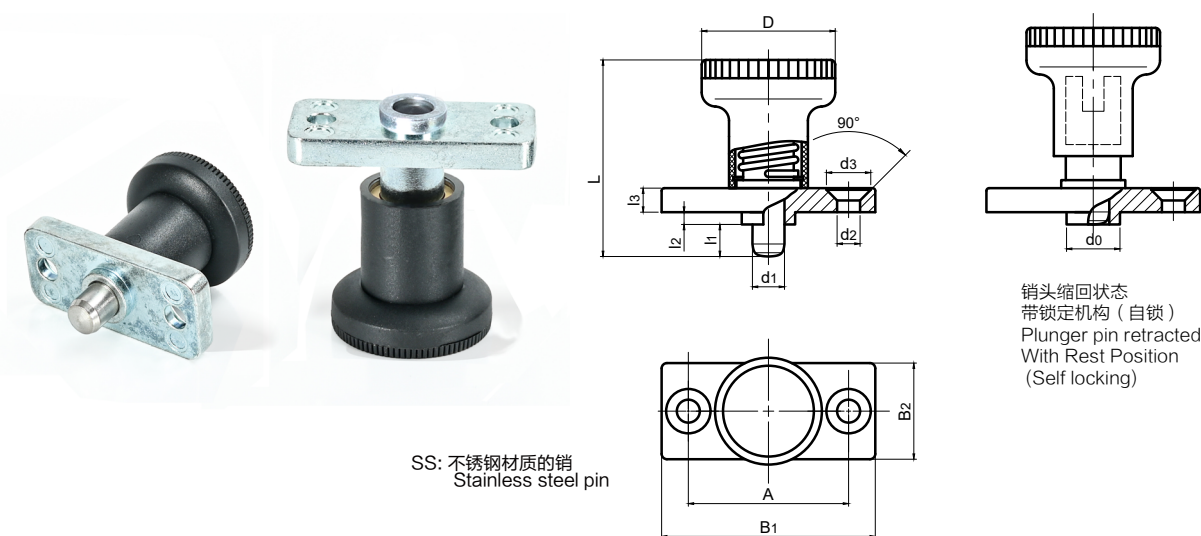

材料: 黑色亚光聚酰胺旋钮, 无螺纹, 主体和法兰为镀蓝锌的锌合金, 黑色碳钢或 SUS303 的销, SUS304 的弹簧。


Material: Polyamide resin knob, Main body and flange blue zinc plated zinc alloy, Black carbon steel or SUS303 pin, SUS304 spring

代号 Code	规格 Description	D	A	d1	l1	B1	B2	L	l2	l3	d0	d2	d3
7982L535	30-6×6	Φ25	30	Φ6	6	40	18	37	2.5	4.5	Φ10	Φ4.3	Φ8.3
7982L747	34-8×8	Φ31	34	Φ8	8	46	20	44	2.5	4.5	Φ12	Φ5.3	Φ10.4
7982LSS535	30-6×6	Φ25	30	Φ6	6	40	18	37	2.5	4.5	Φ10	Φ4.3	Φ8.3
7982LSS747	34-8×8	Φ31	34	Φ8	8	46	20	44	2.5	4.5	Φ12	Φ5.3	Φ10.4

SK7970L金属把手分度销(自锁) Metal knob indexing plungers (Self locking)



SS: 不锈钢材质 Stainless steel
带锁定机构 (自锁) With rest position (Self locking)

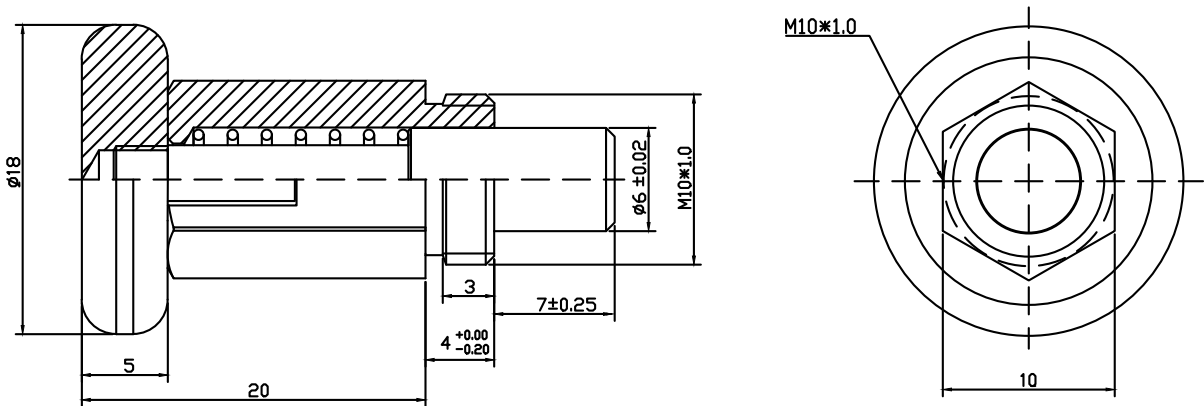


材料：碳钢镀镍或 SUS303 不锈钢的把手、主体与销，SUS304 的弹簧，细牙螺纹。
Material: Carbon steel nickel plating or SUS303 knob, Main body and pin. SUS304 spring, Fine thread.

代号 Code	规格 Description	材质 Material
7970L355	M10 × 1.0-6 × 7	碳钢镀镍 Carbon steel nickel plating
7970LSS355	M10 × 1.0-6 × 7	SUS303

SK7962分度销 Indexing plungers



B: 不带锁定机构 (自复) Without rest position (Self resetting)
 C: 带锁定机构 (自锁) With rest position (Self locking)
 SS: SUS303主体与销 SUS303 main body and pin

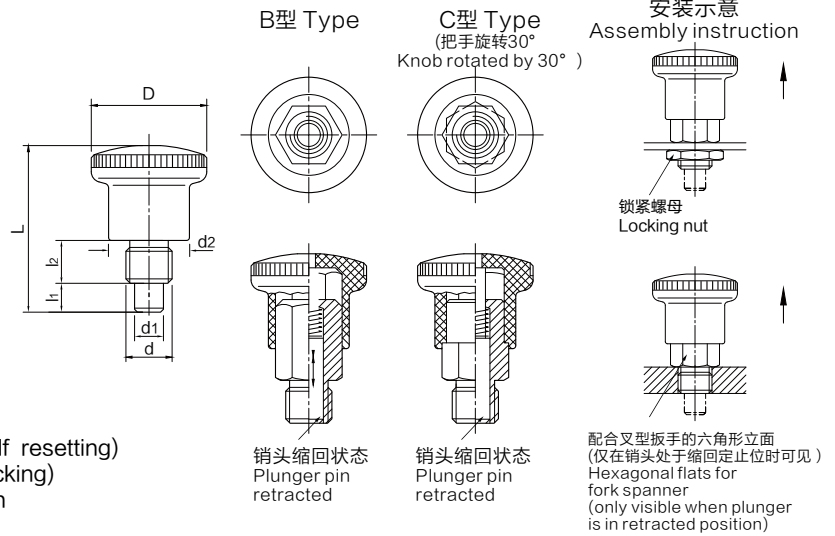

材料: 黑色亚光聚酰胺旋钮, 镀锌碳钢或 SUS303 主体, SUS303 销, SUS304 弹簧, 细牙螺纹


Material: Polyamide resin knob, Galvanized carbon steel or SUS303 main body, SUS303 pin, SUS304 spring, Fine thread

代号 Code	规格 Description	D	d	d ₁ (h9)	l ₁	l ₂ (min.)	L	d ₂	Load/N
7962B443	M8 × 1.0-4 × 5	Φ21	M8 × 1.0	Φ4	5	6	27.5	15	4~12
7962B554	M10 × 1.0-5 × 6	Φ25	M10 × 1.0	Φ5	6	8	34	18	6~16
7962B555	M10 × 1.0-6 × 6	Φ25	M10 × 1.0	Φ6	6	8	34	18	6~16
7962B665	M12 × 1.5-6 × 7	Φ28	M12 × 1.5	Φ6	7	10	40.5	20	10~23
7962B666	M12 × 1.5-7 × 7	Φ28	M12 × 1.5	Φ7	7	10	40.5	20	10~23
7962B887	M16 × 1.5-8 × 10	Φ33	M16 × 1.5	Φ8	10	12	47.5	23	11~35
7962B889	M16 × 1.5-10 × 10	Φ33	M16 × 1.5	Φ10	10	12	47.5	23	11~35
7962C443	M8 × 1.0-4 × 5	Φ21	M8 × 1.0	Φ4	5	6	27.5	15	4~12
7962C554	M10 × 1.0-5 × 6	Φ25	M10 × 1.0	Φ5	6	8	34	18	6~16
7962C555	M10 × 1.0-6 × 6	Φ25	M10 × 1.0	Φ6	6	8	34	18	6~16
7962C665	M12 × 1.5-6 × 7	Φ28	M12 × 1.5	Φ6	7	10	40.5	20	10~23
7962C666	M12 × 1.5-7 × 7	Φ28	M12 × 1.5	Φ7	7	10	40.5	20	10~23
7962C887	M16 × 1.5-8 × 10	Φ33	M16 × 1.5	Φ8	10	12	47.5	23	11~35
7962C889	M16 × 1.5-10 × 10	Φ33	M16 × 1.5	Φ10	10	12	47.5	23	11~35
7962SSB443	M8 × 1.0-4 × 5	Φ21	M8 × 1.0	Φ4	5	6	27.5	15	4~12
7962SSB554	M10 × 1.0-5 × 6	Φ25	M10 × 1.0	Φ5	6	8	34	18	6~16
7962SSB555	M10 × 1.0-6 × 6	Φ25	M10 × 1.0	Φ6	6	8	34	18	6~16
7962SSB665	M12 × 1.5-6 × 7	Φ28	M12 × 1.5	Φ6	7	10	40.5	20	10~23
7962SSB666	M12 × 1.5-7 × 7	Φ28	M12 × 1.5	Φ7	7	10	40.5	20	10~23
7962SSB887	M16 × 1.5-8 × 10	Φ33	M16 × 1.5	Φ8	10	12	47.5	23	11~35
7962SSB889	M16 × 1.5-10 × 10	Φ33	M16 × 1.5	Φ10	10	12	47.5	23	11~35
7962SSC443	M8 × 1.0-4 × 5	Φ21	M8 × 1.0	Φ4	5	6	27.5	15	4~12
7962SSC554	M10 × 1.0-5 × 6	Φ25	M10 × 1.0	Φ5	6	8	34	18	6~16
7962SSC555	M10 × 1.0-6 × 6	Φ25	M10 × 1.0	Φ6	6	8	34	18	6~16
7962SSC665	M12 × 1.5-6 × 7	Φ28	M12 × 1.5	Φ6	7	10	40.5	20	10~23
7962SSC666	M12 × 1.5-7 × 7	Φ28	M12 × 1.5	Φ7	7	10	40.5	20	10~23
7962SSC887	M16 × 1.5-8 × 10	Φ33	M16 × 1.5	Φ8	10	12	47.5	23	11~35
7962SSC889	M16 × 1.5-10 × 10	Φ33	M16 × 1.5	Φ10	10	12	47.5	23	11~35

SK7971长款拉环式分度销 Long indexing plungers



□ A: 不带锁紧螺母
Without locking nut
— AK: 带锁紧螺母
With locking nut
SS: 不锈钢材质
Stainless steel

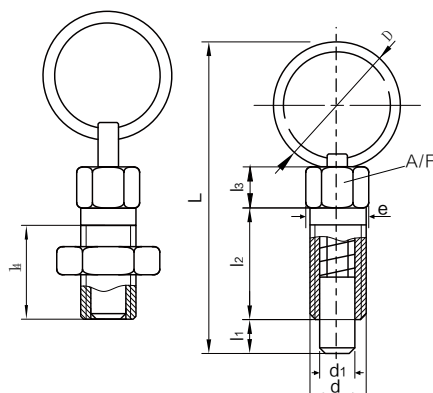

材料: 镀锌碳钢或 SUS303 主体、螺母、销、拉环, SUS304 弹簧, 粗牙螺纹


Material: Zinc plated carbon steel or SUS303 main body, nut, pin, pull ring. SUS304 spring, Coarse thread.

代号 Code	规格 Description	D	d	d1	l1	l2	l3	l4	L	e	A/F
7971132 □	M6 × 1.0-3 × 3.5	14	M6 × 1.0	Φ3	3.5	12	4.5	10	34	6.9	6
7971133 □	M6 × 1.0-4 × 4	14	M6 × 1.0	Φ4	4	12	4.5	10	34.5	6.9	6
7971244 □	M8 × 1.25-5 × 5	18	M8 × 1.25	Φ5	5	16	6	13.5	45	9.2	8
7971355 □	M10 × 1.5-6 × 6	24	M10 × 1.5	Φ6	6	20	7.5	17	57.5	11.5	10
7971767 □	M12 × 1.75-8 × 8	30	M12 × 1.75	Φ8	8	24	9	20.5	71	13.8	12
7971787 □	M16 × 1.5-8 × 10	30	M16 × 1.5	Φ8	10	26	10	24	76	19.6	17
7971789 □	M16 × 1.5-10 × 10	30	M16 × 1.5	Φ10	10	26	10	24	76	19.6	17
7971SS132 □	M6 × 1.0-3 × 3.5	14	M6 × 1.0	Φ3	3.5	12	4.5	10	34	6.9	6
7971SS133 □	M6 × 1.0-4 × 4	14	M6 × 1.0	Φ4	4	12	4.5	10	34.5	6.9	6
7971SS244 □	M8 × 1.25-5 × 5	18	M8 × 1.25	Φ5	5	16	6	13.5	45	9.2	8
7971SS355 □	M10 × 1.5-6 × 6	24	M10 × 1.5	Φ6	6	20	7.5	17	57.5	11.5	10
7971SS767 □	M12 × 1.75-8 × 8	30	M12 × 1.75	Φ8	8	24	9	20.5	71	13.8	12
7971SS787 □	M16 × 1.5-8 × 10	30	M16 × 1.5	Φ8	10	26	10	24	76	19.6	17
7971SS789 □	M16 × 1.5-10 × 10	30	M16 × 1.5	Φ10	10	26	10	24	76	19.6	17

SK7972短款拉环式分度销 Short indexing plungers



□ A: 不带锁紧螺母
Without locking nut
— AK: 带锁紧螺母
With locking nut
SS: 不锈钢材质
Stainless steel

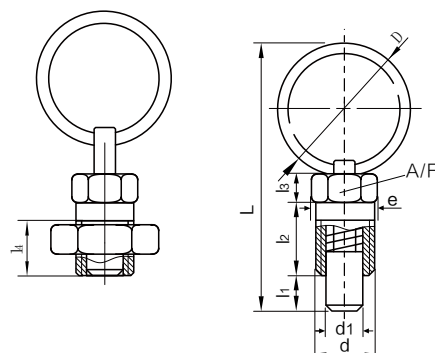


材料: 镀锌碳钢或 SUS303 不锈钢的主体、螺母、销、拉环, SUS304 的弹簧, 粗牙螺纹


Material: Zinc plated carbon steel or SUS303 main body, nut, pin, pull ring. SUS304 spring, Coarse thread.

代号 Code	规格 Description	D	d	d1	l1	l2	l3	l4	L	e	A/F
7972233 □	M6 × 1.0-4 × 4.5	18	M6 × 1.0	Φ4	4.5	8	3	8	33.5	6.9	6
7972244 □	M8 × 1.25-5 × 5.5	18	M8 × 1.25	Φ5	5.5	9	4	9	36.5	9.2	8
7972355 □	M10 × 1.5-6 × 7	24	M10 × 1.5	Φ6	7	11	5	9	47	11.5	10
7972467 □	M12 × 1.75-8 × 9	26	M12 × 1.75	Φ8	9	14	7	11	56	13.8	12
7972789 □	M16 × 2.0-10 × 11	30	M16 × 2.0	Φ10	11	18	7	15	66	19.6	17
7972SS233 □	M6 × 1.0-4 × 5	18	M6 × 1.0	Φ4	5	8	3	8	34	6.9	6
7972SS244 □	M8 × 1.25-5 × 6	18	M8 × 1.25	Φ5	6	9	4	9	37	9.2	8
7972SS355 □	M10 × 1.5-6 × 7	24	M10 × 1.5	Φ6	7	11	5	9	47	11.5	10
7972SS467 □	M12 × 1.75-8 × 10	26	M12 × 1.75	Φ8	10	14	7	11	57	13.8	12
7972SS789 □	M16 × 2.0-10 × 11	30	M16 × 2.0	Φ10	11	18	7	15	66	19.6	17

SK7508水平调节脚 leveling feet

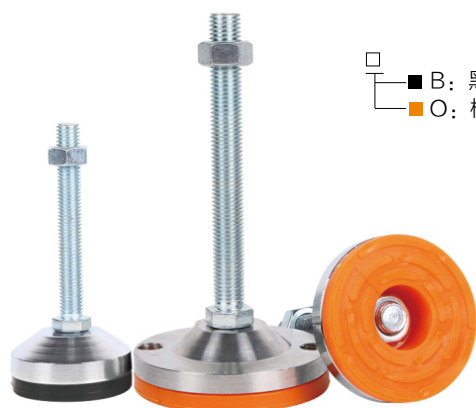

■ B: 黑色胶垫 Black TPR feet
 ■ O: 橙色胶垫 Orange TPR feet

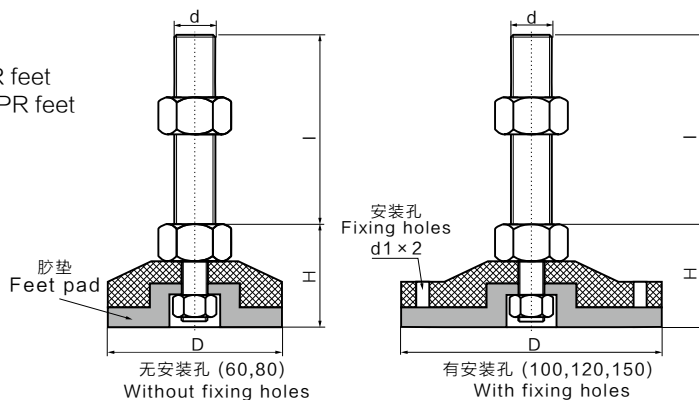


材质: 碳钢的底座、螺杆、螺母, TPR 材质的胶垫

Material: Carbon steel base, Thread and nut. TPR feet pad


代号 Code	规格 Description	D	d	l(-5mm)	H	d ₁
7508311 □	50 × M8 × 50	Φ50	M8	50	32	—
7508314 □	50 × M8 × 100	Φ50	M8	100	32	—
7508321 □	50 × M10 × 50	Φ50	M10	50	34	—
7508323 □	50 × M10 × 80	Φ50	M10	80	34	—
7508324 □	50 × M10 × 100	Φ50	M10	100	34	—
7508331 □	50 × M12 × 50	Φ50	M12	50	34	—
7508334 □	50 × M12 × 100	Φ50	M12	100	34	—
7508421 □	60 × M10 × 50	Φ60	M10	50	34	—
7508424 □	60 × M10 × 100	Φ60	M10	100	34	—
7508431 □	60 × M12 × 50	Φ60	M12	50	35	—
7508433 □	60 × M12 × 80	Φ60	M12	80	35	—
7508434 □	60 × M12 × 100	Φ60	M12	100	35	—
7508436 □	60 × M12 × 150	Φ60	M12	150	35	—
7508454 □	60 × M16 × 100	Φ60	M16	100	37	—
7508456 □	60 × M16 × 150	Φ60	M16	150	37	—
7508457 □	60 × M16 × 200	Φ60	M16	200	37	—
7508459 □	60 × M16 × 300	Φ60	M16	300	37	—
7508474 □	60 × M20 × 100	Φ60	M20	100	38	—
7508534 □	80 × M12 × 100	Φ80	M12	100	38	—
7508536 □	80 × M12 × 150	Φ80	M12	150	38	—
7508554 □	80 × M16 × 100	Φ80	M16	100	39	—
7508555 □	80 × M16 × 120	Φ80	M16	120	39	—
7508556 □	80 × M16 × 150	Φ80	M16	150	39	—
7508557 □	80 × M16 × 200	Φ80	M16	200	39	—
7508573 □	80 × M20 × 80	Φ80	M20	80	40	—
7508574 □	80 × M20 × 100	Φ80	M20	100	40	—
7508575 □	80 × M20 × 120	Φ80	M20	120	40	—

代号 Code	规格 Description	D	d	l	H	d1
7508576 □	80 × M20 × 150	Φ80	M20	150	40	—
7508577 □	80 × M20 × 200	Φ80	M20	200	40	—
7508584 □	80 × M24 × 100	Φ80	M24	100	41	—
7508586 □	80 × M24 × 150	Φ80	M24	150	41	—
7508587 □	80 × M24 × 200	Φ80	M24	200	41	—
7508634 □	100 × M12 × 100	Φ100	M12	100	38	Φ12.5
7508636 □	100 × M12 × 150	Φ100	M12	150	38	Φ12.5
7508654 □	100 × M16 × 100	Φ100	M16	100	40	Φ12.5
7508655 □	100 × M16 × 120	Φ100	M16	120	40	Φ12.5
7508656 □	100 × M16 × 150	Φ100	M16	150	40	Φ12.5
7508657 □	100 × M16 × 200	Φ100	M16	200	40	Φ12.5
7508674 □	100 × M20 × 100	Φ100	M20	100	41	Φ12.5
7508675 □	100 × M20 × 120	Φ100	M20	120	41	Φ12.5
7508676 □	100 × M20 × 150	Φ100	M20	150	41	Φ12.5
7508677 □	100 × M20 × 200	Φ100	M20	200	41	Φ12.5
7508678 □	100 × M20 × 250	Φ100	M20	250	41	Φ12.5
7508684 □	100 × M24 × 100	Φ100	M24	100	42	Φ12.5
7508686 □	100 × M24 × 150	Φ100	M24	150	42	Φ12.5
7508687 □	100 × M24 × 200	Φ100	M24	200	42	Φ12.5
7508688 □	100 × M24 × 250	Φ100	M24	250	42	Φ12.5
7508689 □	100 × M24 × 300	Φ100	M24	300	42	Φ12.5
7508734 □	120 × M12 × 100	Φ120	M12	100	40	Φ13.8
7508754 □	120 × M16 × 100	Φ120	M16	100	42	Φ13.8
7508756 □	120 × M16 × 150	Φ120	M16	150	42	Φ13.8
7508757 □	120 × M16 × 200	Φ120	M16	200	42	Φ13.8
7508774 □	120 × M20 × 100	Φ120	M20	100	43	Φ13.8
7508776 □	120 × M20 × 150	Φ120	M20	150	43	Φ13.8
7508777 □	120 × M20 × 200	Φ120	M20	200	43	Φ13.8
7508778 □	120 × M20 × 250	Φ120	M20	250	43	Φ13.8
7508779 □	120 × M20 × 300	Φ120	M20	300	43	Φ13.8
7508784 □	120 × M24 × 100	Φ120	M24	100	44	Φ13.8
7508786 □	120 × M24 × 150	Φ120	M24	150	44	Φ13.8
7508787 □	120 × M24 × 200	Φ120	M24	200	44	Φ13.8
7508788 □	120 × M24 × 250	Φ120	M24	250	44	Φ13.8
7508854 □	150 × M16 × 100	Φ150	M16	100	46	Φ14.5
7508856 □	150 × M16 × 150	Φ150	M16	150	46	Φ14.5
7508857 □	150 × M16 × 200	Φ150	M16	200	46	Φ14.5
7508874 □	150 × M20 × 100	Φ150	M20	100	47	Φ14.5
7508876 □	150 × M20 × 150	Φ150	M20	150	47	Φ14.5
7508877 □	150 × M20 × 200	Φ150	M20	200	47	Φ14.5
7508884 □	150 × M24 × 100	Φ150	M24	100	48	Φ14.5
7508886 □	150 × M24 × 150	Φ150	M24	150	48	Φ14.5
7508887 □	150 × M24 × 200	Φ150	M24	200	48	Φ14.5

SK7508SS不锈钢水平调节脚 leveling feet

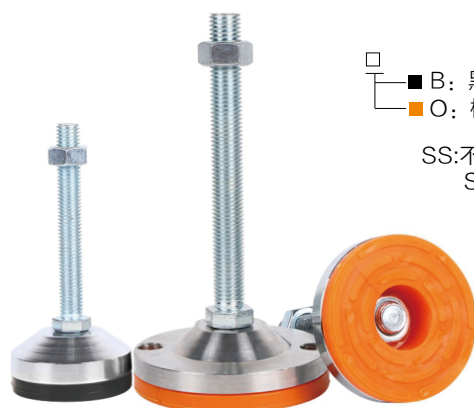

■ B: 黑色胶垫 Black TPR feet
 ■ O: 橙色胶垫 Orange TPR feet
 SS: 不锈钢材质
 Stainless steel


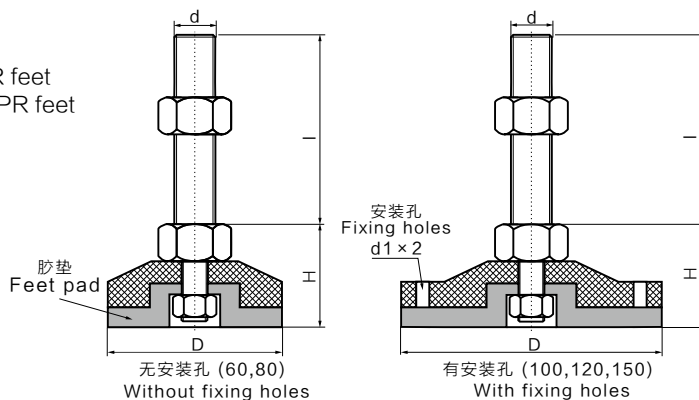


材质: SUS304 的底座、螺杆、螺母, TPR 材质的胶垫
 Material: SUS304 base, Thread and nut. TPR feet pad

代号 Code	规格 Description	D	d	l(-5mm)	H	d1
7508SS311 □	50 × M8 × 50	Φ50	M8	50	32	-
7508SS314 □	50 × M8 × 100	Φ50	M8	100	32	-
7508SS321 □	50 × M10 × 50	Φ50	M10	50	34	-
7508SS323 □	50 × M10 × 80	Φ50	M10	80	34	-
7508SS324 □	50 × M10 × 100	Φ50	M10	100	34	-
7508SS331 □	50 × M12 × 50	Φ50	M12	50	34	-
7508SS334 □	50 × M12 × 100	Φ50	M12	100	34	-
7508SS421 □	60 × M10 × 50	Φ60	M10	50	34	-
7508SS424 □	60 × M10 × 100	Φ60	M10	100	34	-
7508SS431 □	60 × M12 × 50	Φ60	M12	50	35	-
7508SS433 □	60 × M12 × 80	Φ60	M12	80	35	-
7508SS434 □	60 × M12 × 100	Φ60	M12	100	35	-
7508SS436 □	60 × M12 × 150	Φ60	M12	150	35	-
7508SS454 □	60 × M16 × 100	Φ60	M16	100	37	-
7508SS456 □	60 × M16 × 150	Φ60	M16	150	37	-
7508SS457 □	60 × M16 × 200	Φ60	M16	200	37	-
7508SS459 □	60 × M16 × 300	Φ60	M16	300	37	-
7508SS474 □	60 × M20 × 100	Φ60	M20	100	38	-
7508SS534 □	80 × M12 × 100	Φ80	M12	100	38	-
7508SS536 □	80 × M12 × 150	Φ80	M12	150	38	-
7508SS554 □	80 × M16 × 100	Φ80	M16	100	39	-
7508SS555 □	80 × M16 × 120	Φ80	M16	120	39	-
7508SS556 □	80 × M16 × 150	Φ80	M16	150	39	-
7508SS557 □	80 × M16 × 200	Φ80	M16	200	39	-
7508SS573 □	80 × M20 × 80	Φ80	M20	80	40	-
7508SS574 □	80 × M20 × 100	Φ80	M20	100	40	-
7508SS575 □	80 × M20 × 120	Φ80	M20	120	40	-

代号 Code	规格 Description	D	d	l	H	d1
7508SS576 □	80 × M20 × 150	Φ80	M20	150	40	—
7508SS577 □	80 × M20 × 200	Φ80	M20	200	40	—
7508SS584 □	80 × M24 × 100	Φ80	M24	100	41	—
7508SS586 □	80 × M24 × 150	Φ80	M24	150	41	—
7508SS587 □	80 × M24 × 200	Φ80	M24	200	41	—
7508SS634 □	100 × M12 × 100	Φ100	M12	100	38	Φ12.5
7508SS636 □	100 × M12 × 150	Φ100	M12	150	38	Φ12.5
7508SS654 □	100 × M16 × 100	Φ100	M16	100	40	Φ12.5
7508SS655 □	100 × M16 × 120	Φ100	M16	120	40	Φ12.5
7508SS656 □	100 × M16 × 150	Φ100	M16	150	40	Φ12.5
7508SS657 □	100 × M16 × 200	Φ100	M16	200	40	Φ12.5
7508SS674 □	100 × M20 × 100	Φ100	M20	100	41	Φ12.5
7508SS675 □	100 × M20 × 120	Φ100	M20	120	41	Φ12.5
7508SS676 □	100 × M20 × 150	Φ100	M20	150	41	Φ12.5
7508SS677 □	100 × M20 × 200	Φ100	M20	200	41	Φ12.5
7508SS678 □	100 × M20 × 250	Φ100	M20	250	41	Φ12.5
7508SS684 □	100 × M24 × 100	Φ100	M24	100	42	Φ12.5
7508SS686 □	100 × M24 × 150	Φ100	M24	150	42	Φ12.5
7508SS687 □	100 × M24 × 200	Φ100	M24	200	42	Φ12.5
7508SS688 □	100 × M24 × 250	Φ100	M24	250	42	Φ12.5
7508SS689 □	100 × M24 × 300	Φ100	M24	300	42	Φ12.5
7508SS734 □	120 × M12 × 100	Φ120	M12	100	40	Φ13.8
7508SS754 □	120 × M16 × 100	Φ120	M16	100	42	Φ13.8
7508SS756 □	120 × M16 × 150	Φ120	M16	150	42	Φ13.8
7508SS757 □	120 × M16 × 200	Φ120	M16	200	42	Φ13.8
7508SS774 □	120 × M20 × 100	Φ120	M20	100	43	Φ13.8
7508SS776 □	120 × M20 × 150	Φ120	M20	150	43	Φ13.8
7508SS777 □	120 × M20 × 200	Φ120	M20	200	43	Φ13.8
7508SS778 □	120 × M20 × 250	Φ120	M20	250	43	Φ13.8
7508SS779 □	120 × M20 × 300	Φ120	M20	300	43	Φ13.8
7508SS784 □	120 × M24 × 100	Φ120	M24	100	44	Φ13.8
7508SS786 □	120 × M24 × 150	Φ120	M24	150	44	Φ13.8
7508SS787 □	120 × M24 × 200	Φ120	M24	200	44	Φ13.8
7508SS788 □	120 × M24 × 250	Φ120	M24	250	44	Φ13.8
7508SS854 □	150 × M16 × 100	Φ150	M16	100	46	Φ14.5
7508SS856 □	150 × M16 × 150	Φ150	M16	150	46	Φ14.5
7508SS857 □	150 × M16 × 200	Φ150	M16	200	46	Φ14.5
7508SS874 □	150 × M20 × 100	Φ150	M20	100	47	Φ14.5
7508SS876 □	150 × M20 × 150	Φ150	M20	150	47	Φ14.5
7508SS877 □	150 × M20 × 200	Φ150	M20	200	47	Φ14.5
7508SS884 □	150 × M24 × 100	Φ150	M24	100	48	Φ14.5
7508SS886 □	150 × M24 × 150	Φ150	M24	150	48	Φ14.5
7508SS887 □	150 × M24 × 200	Φ150	M24	200	48	Φ14.5



SK7002小手柄 Little handles

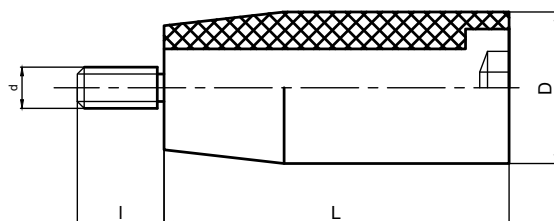

材料：黑色亮光热塑性塑料手柄体、黑色氧化处理的钢质转轴
Material: Thermoplastic body, Black oxidation treatment steel shaft

代号 Code	规格 Description	L	d	l	D
7002033	25 × M6 × 10	25	M6	10	Φ13
7002133	32 × M6 × 12	32	M6	12	Φ15
7002233	40 × M6 × 14	40	M6	14	Φ17



SK7005转动手柄 Revolving handles

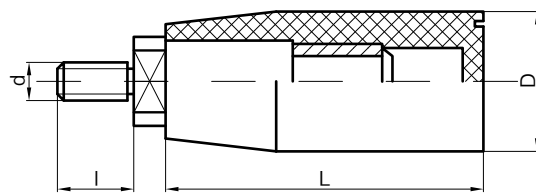

材料：黑色亚光聚酰胺手柄体、黑色氧化处理的钢质转轴
Material: Matte polyamide resin body, Black oxidation treatment steel shaft

代号 Code	规格 Description	L	d	l	D
7005334	50 × M6 × 12	50	M6	12	Φ21
7005444	63 × M8 × 12	63	M8	12	Φ23
7005556	80 × M10 × 14	80	M10	14	Φ25
7005666	100 × M12 × 14	100	M12	14	Φ27


SK7006转动手柄 Revolving handles

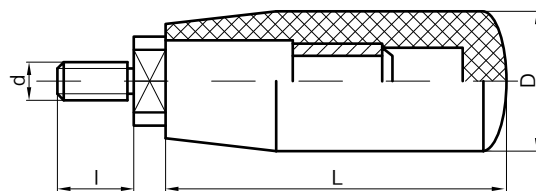

材料：黑色亮光热固性塑料手柄体、黑色氧化处理的钢质转轴
Material: Duroplast body, Black oxidation treatment steel shaft

代号 Code	规格 Description	L	d	l	D
7006334	50 × M6 × 12	50	M6	12	Φ22
7006444	63 × M8 × 12	63	M8	12	Φ24
7006556	80 × M10 × 14	80	M10	14	Φ27
7006666	100 × M12 × 14	100	M12	14	Φ28

SK7010可折手柄 Fold-down handles

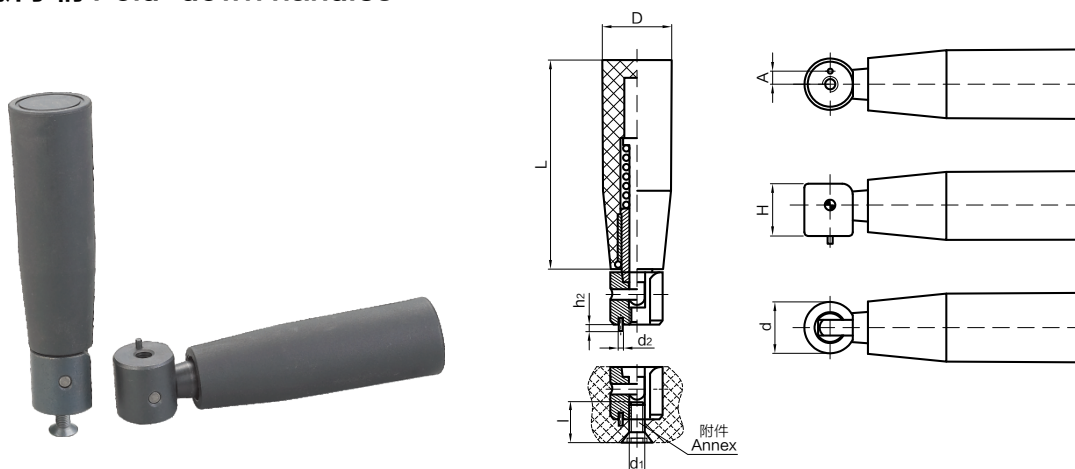

材料：黑色亚光聚酰胺手柄体、黑色氧化处理的钢质手柄头与转轴


Material: Matte polyamide resin body, Black oxide treatment steel handle head and shaft

“P” 如图所示的定位销结构，可以定制 indicates the torque pin structure, can be customized

“F” 带附件合金钢平头内六角螺钉 $d1 \times l$ with annex alloy steel HEX countersunk head screw $d1 \times l$

代号 Code	规格 Description	L	d	H	D	A	d ₂	h ₂	d ₁	l
7010P344F	50 × 16	50	Φ16	15	Φ21	5	Φ2	3	M4	10
7010P444F	63 × 16	63	Φ16	15	Φ23	5	Φ2	3	M4	10
7010P466F	63 × 20	63	Φ20	20	Φ23	5	Φ2	3	M6	16
7010P566F	80 × 20	80	Φ20	20	Φ25	5	Φ2	3	M6	16
7010P666F	100 × 20	100	Φ20	20	Φ27	5	Φ2	3	M6	20

SK7010SS不锈钢可折手柄 Stainless steel fold-down handles

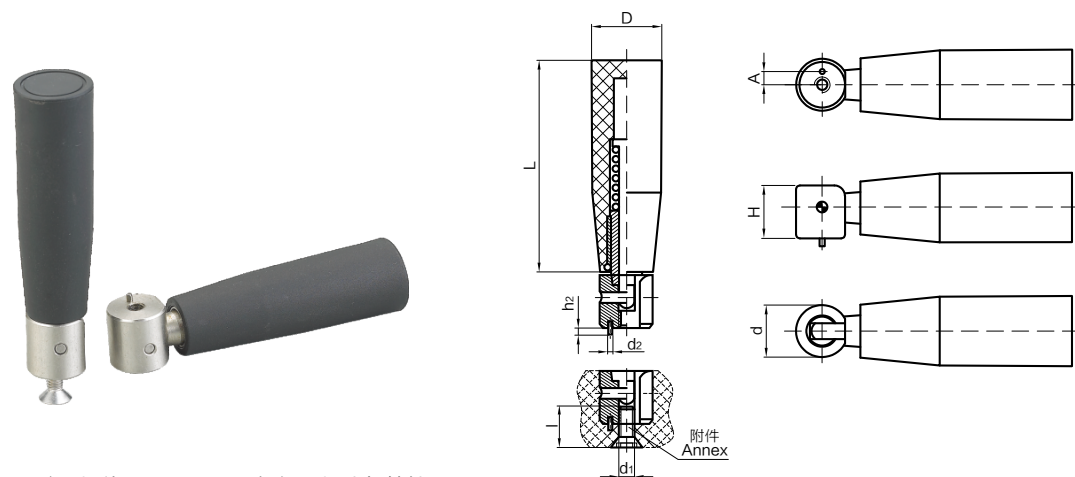

材料：黑色亚光聚酰胺手柄体、SUS303 不锈钢手柄头与转轴


Material: Matte polyamide resin body, SUS303 handle head and shaft

“P” 如图所示的定位销结构，可以定制 indicates the torque pin structure, can be customized

“F” 带附件合金钢平头内六角螺钉 $d1 \times l$ with annex alloy steel HEX countersunk head screw $d1 \times l$

代号 Code	规格 Description	L	d	H	D	A	d ₂	h ₂	d ₁	l
7010SSP344F	50 × 16	50	Φ16	15	Φ21	5	Φ2	3	M4	10
7010SSP444F	63 × 16	63	Φ16	15	Φ23	5	Φ2	3	M4	10
7010SSP466F	63 × 20	63	Φ20	20	Φ23	5	Φ2	3	M6	16
7010SSP566F	80 × 20	80	Φ20	20	Φ25	5	Φ2	3	M6	16
7010SSP666F	100 × 20	100	Φ20	20	Φ27	5	Φ2	3	M6	20

SK7011可折手柄 Fold-down handles

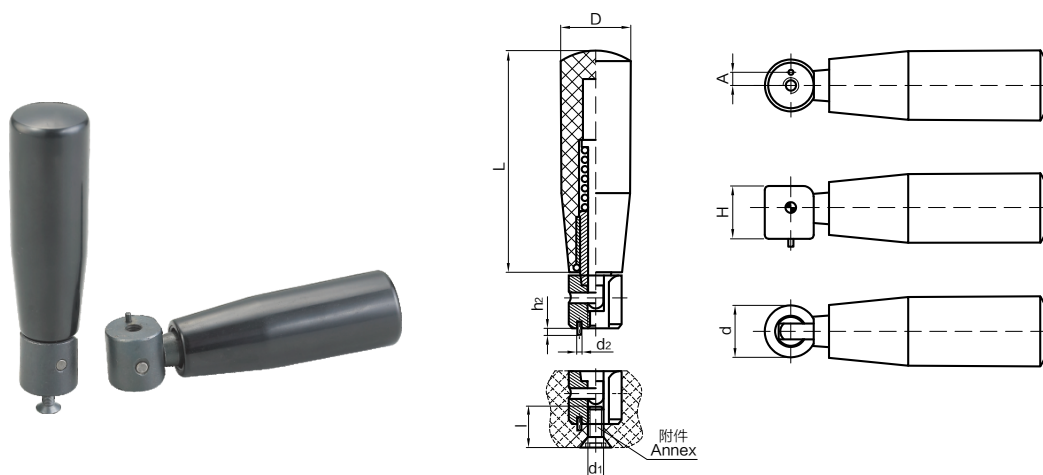

材料：黑色亮光热固性塑料手柄体、黑色氧化处理的钢质手柄头与转轴


Material: Duroplast body, Black oxide treatment steel handle head and shaft

“P” 如图所示的定位销结构，可以定制 indicates the torque pin structure, can be customized

“F” 带附件合金钢平头内六角螺钉 d1×l with annex alloy steel HEX countersunk head screw d1×l

代号 Code	规格 Description	L	d	H	D	A	d2	h2	d1	l
7011P344F	50 × 16	50	Φ16	15	Φ22	5	Φ2	3	M4	10
7011P444F	63 × 16	63	Φ16	15	Φ24	5	Φ2	3	M4	10
7011P466F	63 × 20	63	Φ20	20	Φ24	5	Φ2	3	M6	16
7011P566F	80 × 20	80	Φ20	20	Φ27	5	Φ2	3	M6	16
7011P666F	100 × 20	100	Φ20	20	Φ28	5	Φ2	3	M6	20

SK7011SS不锈钢可折手柄 Stainless steel fold-down handles

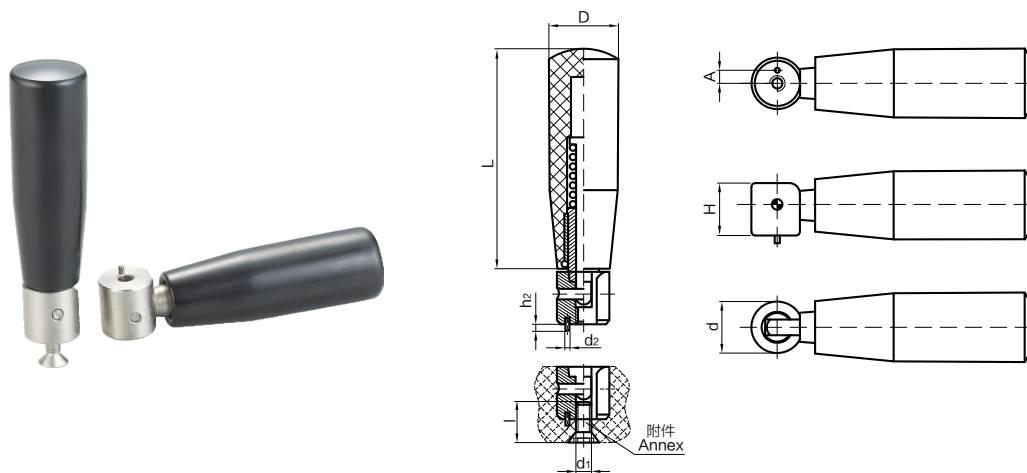

材料：黑色亮光热固性塑料手柄体、SUS303 不锈钢手柄头与转轴

Material: Duroplast body, SUS303 handle head and shaft

“P” 如图所示的定位销结构，可以定制 indicates the torque pin structure, can be customized



“F” 带附件合金钢平头内六角螺钉 d1×l with annex alloy steel HEX countersunk head screw d1×l

代号 Code	规格 Description	L	d	H	D	A	d2	h2	d1	l
7011SSP344F	50 × 16	50	Φ16	15	Φ22	5	Φ2	3	M4	10
7011SSP444F	63 × 16	63	Φ16	15	Φ24	5	Φ2	3	M4	10
7011SSP466F	63 × 20	63	Φ20	20	Φ24	5	Φ2	3	M6	16
7011SSP566F	80 × 20	80	Φ20	20	Φ27	5	Φ2	3	M6	16
7011SSP666F	100 × 20	100	Φ20	20	Φ28	5	Φ2	3	M6	20

SK7012可调手柄 Adjustable handles



颜色Color: ☐ B: 黑Black
☐ O: 橙Orange

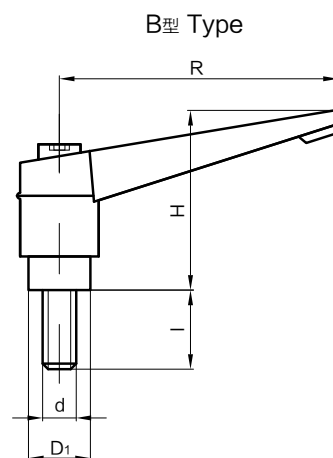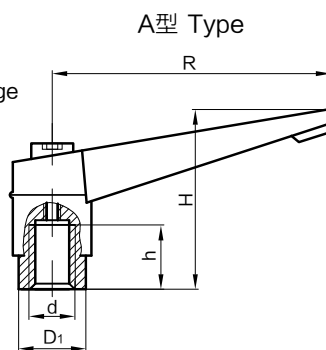


材料：黑色或橙色锌合金手柄体、黑色氧化处理的钢质滑套与螺钉

Material: Zinc alloy handle body, Black oxide treatment steel sliding sleeve and screw

注：可定做非标尺寸的滑套 The sliding sleeve can be customized in nonstandard sizes

代号 Code	规格 Description	R	d	l	h	H	D1
7012320 ☐	50 × AM5	50	M5		9	35	Φ9.8
7012321 ☐	50 × M5 × 16	50	M5	16		35	Φ9.8
7012322 ☐	50 × M5 × 20	50	M5	20		35	Φ9.8
7012323 ☐	50 × M5 × 25	50	M5	25		35	Φ9.8
7012330 ☐	50 × AM6	50	M6		9	35	Φ9.8
7012331 ☐	50 × M6 × 16	50	M6	16		35	Φ9.8
7012332 ☐	50 × M6 × 20	50	M6	20		35	Φ9.8
7012333 ☐	50 × M6 × 25	50	M6	25		35	Φ9.8
7012440 ☐	63 × AM8	63	M8		12	44	Φ12.9
7012442 ☐	63 × M8 × 20	63	M8	20		44	Φ12.9
7012443 ☐	63 × M8 × 25	63	M8	25		44	Φ12.9
7012444 ☐	63 × M8 × 32	63	M8	32		44	Φ12.9
7012446 ☐	63 × M8 × 40	63	M8	40		44	Φ12.9
7012447 ☐	63 × M8 × 50	63	M8	50		44	Φ12.9
7012550 ☐	80 × AM10	80	M10		15	54	Φ16.1
7012552 ☐	80 × M10 × 20	80	M10	20		54	Φ16.1
7012553 ☐	80 × M10 × 25	80	M10	25		54	Φ16.1
7012554 ☐	80 × M10 × 32	80	M10	32		54	Φ16.1
7012556 ☐	80 × M10 × 40	80	M10	40		54	Φ16.1
7012557 ☐	80 × M10 × 50	80	M10	50		54	Φ16.1
7012660 ☐	95 × AM12	95	M12		17	61	Φ19.2
7012663 ☐	95 × M12 × 25	95	M12	25		61	Φ19.2
7012664 ☐	95 × M12 × 32	95	M12	32		61	Φ19.2
7012666 ☐	95 × M12 × 40	95	M12	40		61	Φ19.2
7012667 ☐	95 × M12 × 50	95	M12	50		61	Φ19.2
7012668 ☐	95 × M12 × 63	95	M12	63		61	Φ19.2
7012880 ☐	114 × AM16	114	M16		20	69	Φ22.3
7012886 ☐	114 × M16 × 40	114	M16	40		69	Φ22.3
7012887 ☐	114 × M16 × 50	114	M16	50		69	Φ22.3
7012888 ☐	114 × M16 × 63	114	M16	63		69	Φ22.3

SK7015可调手柄 Adjustable handles

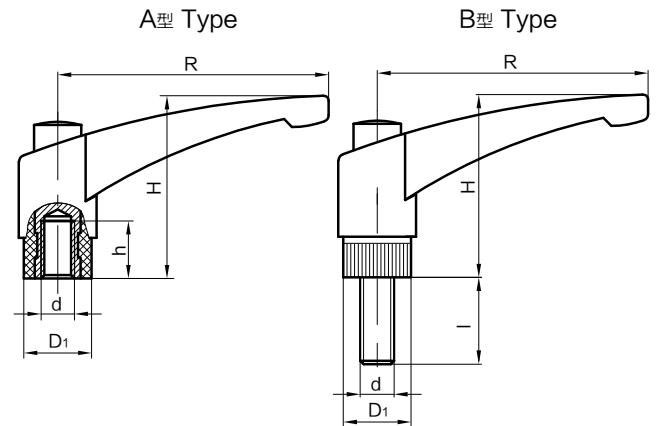颜色 Color: ☐

- BC1: 黑柄黑帽 Black handle body black button
- BC2: 黑柄橙帽 Black handle body orange button
- BC6: 黑柄红帽 Black handle body red button
- BC7: 黑柄绿帽 Black handle body green button

材料：黑色亚光聚酰胺手柄体、白色镀锌处理的钢质螺杆或“T”黄铜螺母

Material: Polyamide resin handle body, White galvanized steel bolt thread or “T” brass nut


注：可定做不同颜色的手柄体 The handle body can be customized in different colors

代号 Code	规格 Description	R	d	l	h	H	D1
7015T320 ☐	45 × AM5	45	M5		9	34	Φ11.5
7015321 ☐	45 × M5 × 15	45	M5	15		34	Φ11.5
7015322 ☐	45 × M5 × 20	45	M5	20		34	Φ11.5
7015323 ☐	45 × M5 × 25	45	M5	25		34	Φ11.5
7015324 ☐	45 × M5 × 30	45	M5	30		34	Φ11.5
7015T330 ☐	45 × AM6	45	M6		9	34	Φ11.5
7015331 ☐	45 × M6 × 15	45	M6	15		34	Φ11.5
7015332 ☐	45 × M6 × 20	45	M6	20		34	Φ11.5
7015333 ☐	45 × M6 × 25	45	M6	25		34	Φ11.5
7015334 ☐	45 × M6 × 30	45	M6	30		34	Φ11.5
7015T440 ☐	65 × AM8	65	M8		13	46	Φ15.5
7015442 ☐	65 × M8 × 20	65	M8	20		46	Φ15.5
7015443 ☐	65 × M8 × 25	65	M8	25		46	Φ15.5
7015444 ☐	65 × M8 × 30	65	M8	30		46	Φ15.5
7015446 ☐	65 × M8 × 40	65	M8	40		46	Φ15.5
7015447 ☐	65 × M8 × 50	65	M8	50		46	Φ15.5
7015T550 ☐	80 × AM10	80	M10		17	55	Φ18.5
7015552 ☐	80 × M10 × 20	80	M10	20		55	Φ18.5
7015553 ☐	80 × M10 × 25	80	M10	25		55	Φ18.5
7015554 ☐	80 × M10 × 30	80	M10	30		55	Φ18.5
7015556 ☐	80 × M10 × 40	80	M10	40		55	Φ18.5
7015557 ☐	80 × M10 × 50	80	M10	50		55	Φ18.5
7015T660 ☐	95 × AM12	95	M12		22	64	Φ21.5
7015663 ☐	95 × M12 × 25	95	M12	25		64	Φ21.5
7015664 ☐	95 × M12 × 30	95	M12	30		64	Φ21.5
7015666 ☐	95 × M12 × 40	95	M12	40		64	Φ21.5
7015667 ☐	95 × M12 × 50	95	M12	50		64	Φ21.5
7015668 ☐	95 × M12 × 60	95	M12	60		64	Φ21.5

SK7018可调手柄 Adjustable handles



颜色Color : ☐ B: 黑Black
☐ O: 橙Orange
☐ G: 灰Grey

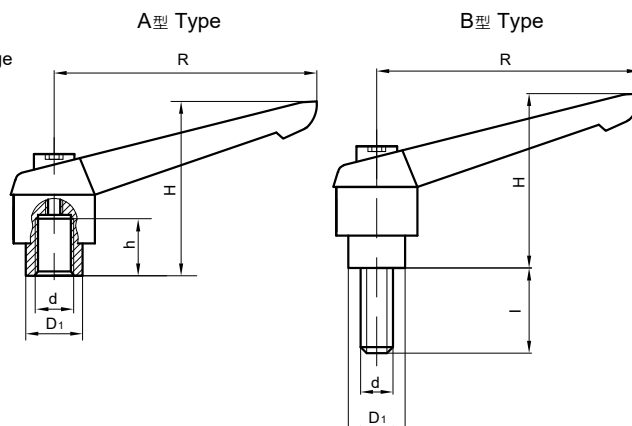

材料：加厚的黑色、橙色或灰色锌合金手柄体、黑色氧化处理的钢质滑套与螺钉


Material: Thick zinc alloy handle body, Black oxide treatment steel sliding sleeve and screw

注：可定做非标尺寸的滑套 The sliding sleeve can be customized in nonstandard sizes

代号 Code	规格 Description	R	d	l	h	H	D ₁
7018220 ☐	40 × AM5	40	M5		9	30	Φ9.2
7018221 ☐	40 × M5 × 15	40	M5	15		30	Φ9.2
7018222 ☐	40 × M5 × 20	40	M5	20		30	Φ9.2
7018223 ☐	40 × M5 × 25	40	M5	25		30	Φ9.2
7018230 ☐	40 × AM6	40	M6		9	30	Φ9.2
7018231 ☐	40 × M6 × 15	40	M6	15		30	Φ9.2
7018232 ☐	40 × M6 × 20	40	M6	20		30	Φ9.2
7018233 ☐	40 × M6 × 25	40	M6	25		30	Φ9.2
7018234 ☐	40 × M6 × 30	40	M6	30		30	Φ9.2
7018440 ☐	65 × AM8	65	M8		12	44	Φ13.7
7018442 ☐	65 × M8 × 20	65	M8	20		44	Φ13.7
7018443 ☐	65 × M8 × 25	65	M8	25		44	Φ13.7
7018444 ☐	65 × M8 × 30	65	M8	30		44	Φ13.7
7018445 ☐	65 × M8 × 35	65	M8	35		44	Φ13.7
7018446 ☐	65 × M8 × 40	65	M8	40		44	Φ13.7
7018447 ☐	65 × M8 × 50	65	M8	50		44	Φ13.7
7018550 ☐	80 × AM10	80	M10		15	53	Φ16
7018552 ☐	80 × M10 × 20	80	M10	20		53	Φ16
7018553 ☐	80 × M10 × 25	80	M10	25		53	Φ16
7018554 ☐	80 × M10 × 30	80	M10	30		53	Φ16
7018555 ☐	80 × M10 × 35	80	M10	35		53	Φ16
7018556 ☐	80 × M10 × 40	80	M10	40		53	Φ16
7018557 ☐	80 × M10 × 50	80	M10	50		53	Φ16
7018660 ☐	95 × AM12	95	M12		17	62	Φ19.6
7018663 ☐	95 × M12 × 25	95	M12	25		62	Φ19.6
7018664 ☐	95 × M12 × 30	95	M12	30		62	Φ19.6
7018666 ☐	95 × M12 × 40	95	M12	40		62	Φ19.6
7018667 ☐	95 × M12 × 50	95	M12	50		62	Φ19.6
7018668 ☐	95 × M12 × 60	95	M12	60		62	Φ19.6
7018880 ☐	110 × AM16	110	M16		20	70	Φ22
7018884 ☐	110 × M16 × 30	110	M16	30		70	Φ22
7018886 ☐	110 × M16 × 40	110	M16	40		70	Φ22
7018887 ☐	110 × M16 × 50	110	M16	50		70	Φ22
7018888 ☐	110 × M16 × 60	110	M16	60		70	Φ22
7018889 ☐	110 × M16 × 70	110	M16	70		70	Φ22

SK7018SS不锈钢可调手柄 Stainless steel adjustable handles


颜色Color: ☐ B: 黑Black
☐ O: 橙Orange
☐ G: 灰Grey

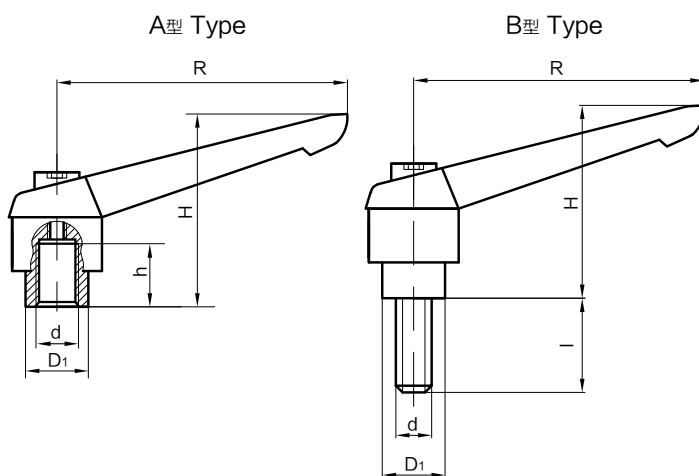

材料: 加厚的黑色、橙色或灰色锌合金手柄体、SUS303滑套与螺钉、SUS304弹簧
Material: Thick zinc alloy handle body, SUS303 thread bolt, Mounting screw. SUS304 spring.
注: 可定做非标尺寸的滑套 The sliding sleeve can be customized in nonstandard sizes

代号 Code	规格 Description	R	d	l	h	H	D1
7018SS220 ☐	40 × AM5	40	M5		9	30	Φ9.2
7018SS221 ☐	40 × M5 × 15	40	M5	15		30	Φ9.2
7018SS222 ☐	40 × M5 × 20	40	M5	20		30	Φ9.2
7018SS223 ☐	40 × M5 × 25	40	M5	25		30	Φ9.2
7018SS230 ☐	40 × AM6	40	M6		9	30	Φ9.2
7018SS231 ☐	40 × M6 × 15	40	M6	15		30	Φ9.2
7018SS232 ☐	40 × M6 × 20	40	M6	20		30	Φ9.2
7018SS233 ☐	40 × M6 × 25	40	M6	25		30	Φ9.2
7018SS234 ☐	40 × M6 × 30	40	M6	30		30	Φ9.2
7018SS440 ☐	65 × AM8	65	M8		12	44	Φ13.7
7018SS442 ☐	65 × M8 × 20	65	M8	20		44	Φ13.7
7018SS443 ☐	65 × M8 × 25	65	M8	25		44	Φ13.7
7018SS444 ☐	65 × M8 × 30	65	M8	30		44	Φ13.7
7018SS445 ☐	65 × M8 × 35	65	M8	35		44	Φ13.7
7018SS446 ☐	65 × M8 × 40	65	M8	40		44	Φ13.7
7018SS447 ☐	65 × M8 × 50	65	M8	50		44	Φ13.7
7018SS550 ☐	80 × AM10	80	M10		15	53	Φ16
7018SS552 ☐	80 × M10 × 20	80	M10	20		53	Φ16
7018SS553 ☐	80 × M10 × 25	80	M10	25		53	Φ16
7018SS554 ☐	80 × M10 × 30	80	M10	30		53	Φ16
7018SS555 ☐	80 × M10 × 35	80	M10	35		53	Φ16
7018SS556 ☐	80 × M10 × 40	80	M10	40		53	Φ16
7018SS557 ☐	80 × M10 × 50	80	M10	50		53	Φ16

SK7019英制可调手柄 Inch adjustable handles

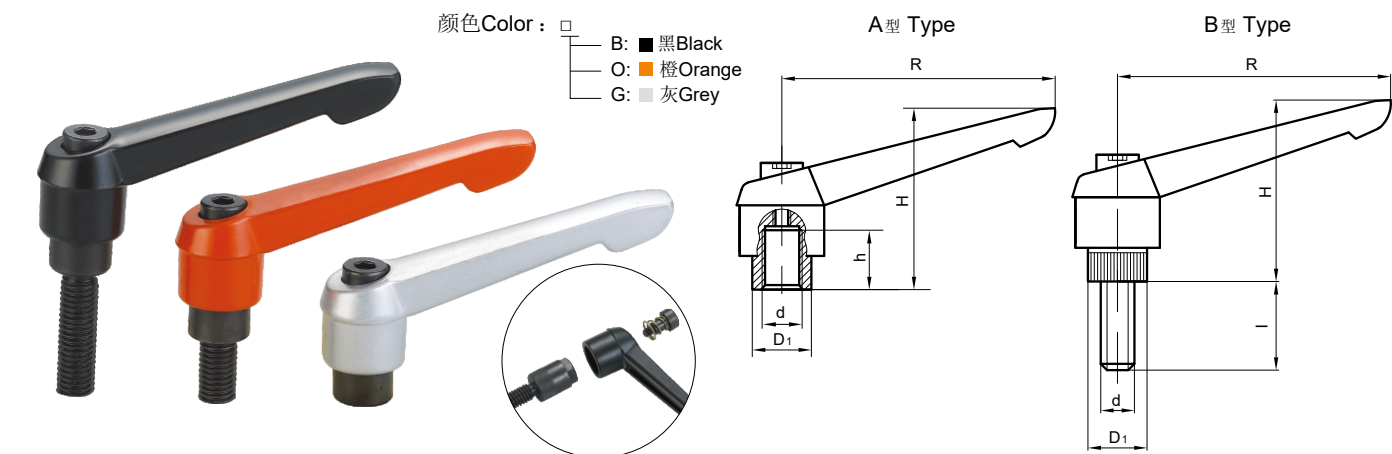


材料：加厚的黑色、橙色或灰色锌合金手柄体、黑色氧化处理的中碳钢质滑套与螺钉

Material: Thick zinc alloy handle body, Black oxide treatment steel sliding sleeve and screw

代号 Code	规格 Description	R	d	l	h	H	D1
7019230 ☐	1.57 × 1/4-20	1.57	1/4-20		0.35	1.18	Φ0.36
7019232 ☐	1.57 × 1/4-20 × 0.50	1.57	1/4-20	0.50		1.18	Φ0.36
7019233 ☐	1.57 × 1/4-20 × 0.75	1.57	1/4-20	0.75		1.18	Φ0.36
7019234 ☐	1.57 × 1/4-20 × 1.00	1.57	1/4-20	1.00		1.18	Φ0.36
7019235 ☐	1.57 × 1/4-20 × 1.25	1.57	1/4-20	1.25		1.18	Φ0.36
7019440 ☐	2.56 × 5/16-18	2.56	5/16-18		0.47	1.73	Φ0.54
7019443 ☐	2.56 × 5/16-18 × 0.75	2.56	5/16-18	0.75		1.73	Φ0.54
7019444 ☐	2.56 × 5/16-18 × 1.00	2.56	5/16-18	1.00		1.73	Φ0.54
7019445 ☐	2.56 × 5/16-18 × 1.25	2.56	5/16-18	1.25		1.73	Φ0.54
7019446 ☐	2.56 × 5/16-18 × 1.50	2.56	5/16-18	1.50		1.73	Φ0.54
7019447 ☐	2.56 × 5/16-18 × 2.00	2.56	5/16-18	2.00		1.73	Φ0.54
7019550 ☐	3.15 × 3/8-16	3.15	3/8-16		0.59	2.09	Φ0.63
7019553 ☐	3.15 × 3/8-16 × 0.75	3.15	3/8-16	0.75		2.09	Φ0.63
7019554 ☐	3.15 × 3/8-16 × 1.00	3.15	3/8-16	1.00		2.09	Φ0.63
7019555 ☐	3.15 × 3/8-16 × 1.25	3.15	3/8-16	1.25		2.09	Φ0.63
7019556 ☐	3.15 × 3/8-16 × 1.50	3.15	3/8-16	1.50		2.09	Φ0.63
7019557 ☐	3.15 × 3/8-16 × 2.00	3.15	3/8-16	2.00		2.09	Φ0.63
7019670 ☐	3.74 × 1/2-12	3.74	1/2-12		0.67	2.44	Φ0.77
7019674 ☐	3.74 × 1/2-12 × 1.00	3.74	1/2-12	1.00		2.44	Φ0.77
7019675 ☐	3.74 × 1/2-12 × 1.25	3.74	1/2-12	1.25		2.44	Φ0.77
7019676 ☐	3.74 × 1/2-12 × 1.50	3.74	1/2-12	1.50		2.44	Φ0.77
7019677 ☐	3.74 × 1/2-12 × 2.00	3.74	1/2-12	2.00		2.44	Φ0.77
7019678 ☐	3.74 × 1/2-12 × 2.50	3.74	1/2-12	2.50		2.44	Φ0.77
7019880 ☐	4.33 × 5/8-11	4.33	5/8-11		0.79	2.76	Φ0.87
7019886 ☐	4.33 × 5/8-11 × 1.50	4.33	5/8-11	1.50		2.76	Φ0.87
7019887 ☐	4.33 × 5/8-11 × 2.00	4.33	5/8-11	2.00		2.76	Φ0.87
7019888 ☐	4.33 × 5/8-11 × 2.50	4.33	5/8-11	2.50		2.76	Φ0.87

SK7028手柄杆 Handle levers

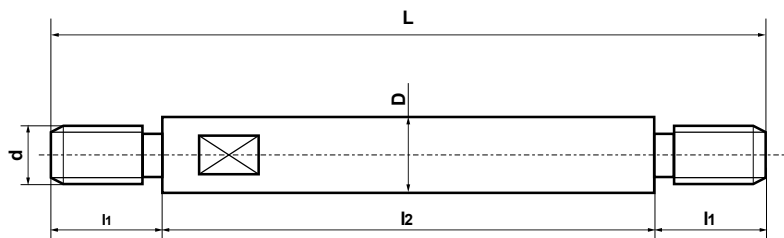


材料：碳钢镀铬或不锈钢，选配 SK7441、SK7442、SK7443、SK7447 把手，“SS”表示不锈钢材质

Material: Carbon steel chrome plated or stainless steel, Match SK7441、SK7442T、SK7443、SK7447 knobs.

代号 Code	规格 Description	L	d	l1	l2	D
7108320	60 × M6 × 10	60	M6	10	40	8
7108321	80 × M6 × 10	80	M6	10	60	8
7108322	100 × M6 × 10	100	M6	10	80	8
7108323	120 × M6 × 10	120	M6	10	100	8
7108325	150 × M6 × 10	150	M6	10	130	8
7108431	80 × M8 × 13	80	M8	13	54	10
7108432	100 × M8 × 13	100	M8	13	74	10
7108434	130 × M8 × 13	130	M8	13	104	10
7108435	150 × M8 × 13	150	M8	13	124	10
7108436	200 × M8 × 13	200	M8	13	174	10
7108437	250 × M8 × 13	250	M8	13	224	10
7108541	80 × M10 × 13	80	M10	13	54	12
7108542	100 × M10 × 13	100	M10	13	74	12
7108544	130 × M10 × 13	130	M10	13	104	12
7108545	150 × M10 × 13	150	M10	13	124	12
7108546	200 × M10 × 13	200	M10	13	174	12
7108547	250 × M10 × 13	250	M10	13	224	12
7108548	300 × M10 × 13	300	M10	13	274	12
7108652	100 × M12 × 13	100	M12	13	74	14
7108654	130 × M12 × 13	130	M12	13	104	14
7108655	150 × M12 × 13	150	M12	13	124	14
7108656	200 × M12 × 13	200	M12	13	174	14
7108657	250 × M12 × 13	250	M12	13	224	14
7108658	300 × M12 × 13	300	M12	13	274	14
7108659	350 × M12 × 13	350	M12	13	324	14
7108766	200 × M14 × 15	200	M14	15	170	16
7108767	250 × M14 × 15	250	M14	15	220	16
7108768	300 × M14 × 15	300	M14	15	270	16
7108769	350 × M14 × 15	350	M14	15	320	16
7108876	200 × M16 × 15	200	M16	15	170	18
7108877	250 × M16 × 15	250	M16	15	220	18
7108878	300 × M16 × 15	300	M16	15	270	18
7108879	350 × M16 × 15	350	M16	15	320	18

SK7057A铝方型拉手 Pull handles

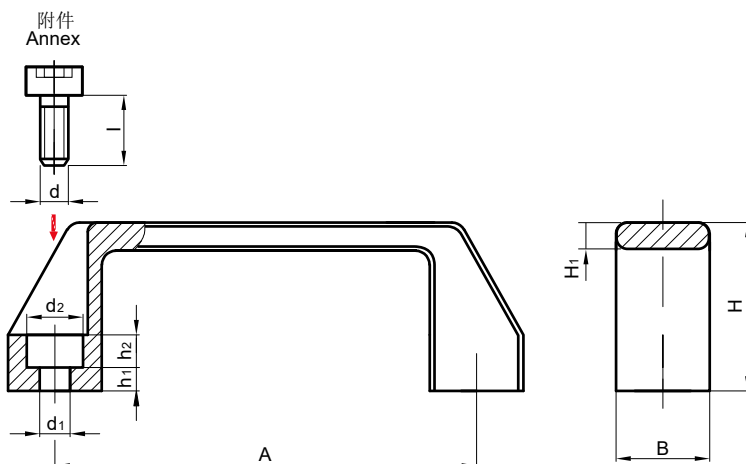


材料：“A” 黑色喷塑处理的铝合金

Material: “A” aluminum alloy

注：“F” 带附件合金钢圆柱头内六角螺钉 $d \times l$ “F” with annex alloy steel HEX socket head screw $d \times l$

代号 Code	规格 Description	$A \pm 1.00$	d	H	H ₁	B	h ₁	h ₂	d ₁	d ₂	l
7057A230F	90 × 6.5	90	M6	36	6	20	5	7	Φ6.5	Φ12	16
7057A340F	120 × 8.5	120	M8	40	8	26	6	9	Φ8.5	Φ15	20
7057A540F	180 × 8.5	180	M8	52	8.5	28.5	9	9	Φ8.5	Φ15	25

SK7057P尼龙方型拉手 Pull handles

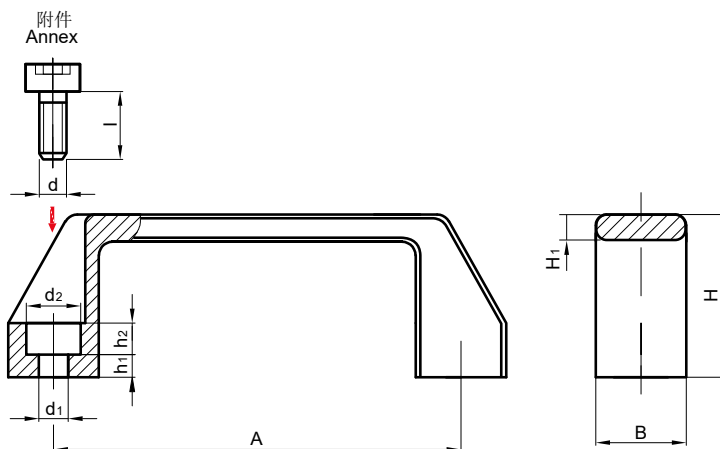


材料：“P” 黑色亚光聚酰胺

Material: “P” matte polyamide resin

注：“F” 带附件合金钢圆柱头内六角螺钉 $d \times l$ “F” with annex alloy steel HEX socket head screw $d \times l$

代号 Code	规格 Description	$A \pm 1.00$	d	H	H ₁	B	h ₁	h ₂	d ₁	d ₂	l
7057P230F	90 × 6.5	90	M6	36	6	20	5	7	Φ6.5	Φ12	16
7057P340F	120 × 8.5	120	M8	40	8	26	6	9	Φ8.5	Φ15	20
7057P540F	180 × 8.5	180	M8	52	8.5	28.5	9	9	Φ8.5	Φ15	25


SK7061椭圆拉手 Pull handles

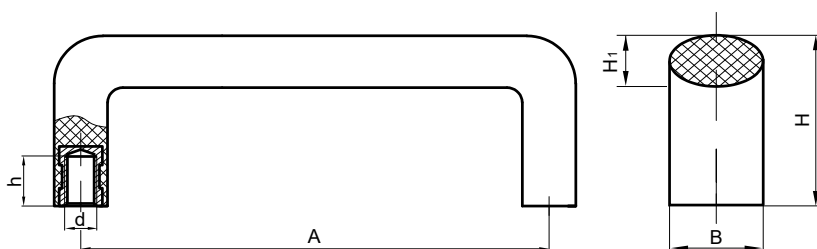

材料：黑色亮光热固性塑料、“T” 黄铜螺母
Material: Duroplast, “T” brass nut

代号 Code	规格 Description	A ± 1.00	d	H	H ₁	B	h
7061T230	90 × M6	90	M6	50	18	28	12
7061T340	120 × M8	120	M8	60	20	30	13
7061T540	180 × M8	180	M8	60	20	30	13
7061T740	240 × M8	240	M8	60	20	30	13

SK7071可折拉手 Fold-down handles


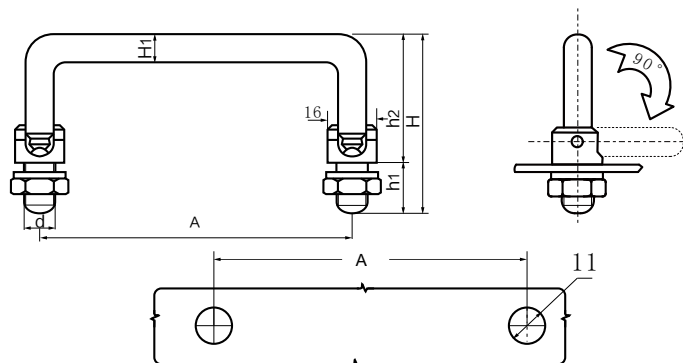


材料：碳钢镀铬或 304 不锈钢，“F” 带锁紧螺母

Material: Carbon steel chrome plated or 304 stainless steel, “F” with locking nut

代号 Code	规格 Description	A	d	H	H ₁	h ₁	h ₂
7071250F	90 × M10 × 1.5	90	M10 × 1.5	55	9	15	40
7071350F	100 × M10 × 1.5	100	M10 × 1.5	55	9	15	40
7071450F	120 × M10 × 1.5	120	M10 × 1.5	55	9	15	40
7071550F	130 × M10 × 1.5	130	M10 × 1.5	55	9	15	40
7071650F	150 × M10 × 1.5	150	M10 × 1.5	55	9	15	40
7071750F	180 × M10 × 1.5	180	M10 × 1.5	55	9	15	40
7071SS250F	90 × M10 × 1.5	90	M10 × 1.5	55	9	15	40
7071SS350F	100 × M10 × 1.5	100	M10 × 1.5	55	9	15	40
7071SS450F	120 × M10 × 1.5	120	M10 × 1.5	55	9	15	40
7071SS550F	130 × M10 × 1.5	130	M10 × 1.5	55	9	15	40
7071SS650F	150 × M10 × 1.5	150	M10 × 1.5	55	9	15	40
7071SS750F	180 × M10 × 1.5	180	M10 × 1.5	55	9	15	40

SK7404七星把手 Star knobs

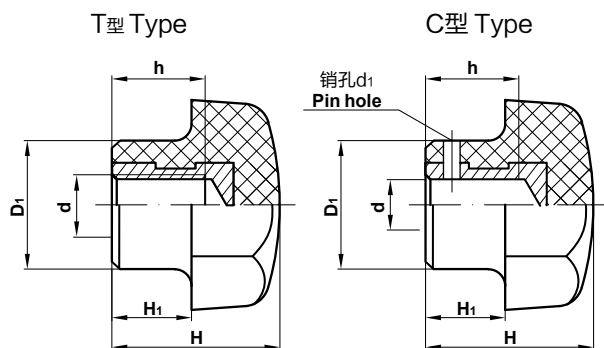



材料：黑色亮光热固性塑料的把手 Material: Duroplast body

注：“T” 黄铜螺母嵌件、“C” 黑色氧化处理的钢质光孔嵌件 “T” brass nut, “C” black oxide treatment steel unthreaded insert

代号 Code	规格 Description	D	d	h	H	D ₁	H ₁	d ₁
7404T220	25 × M5	Φ25	M5	9	20	Φ15	10	
7404T230	25 × M6	Φ25	M6	12	20	Φ15	10	
7404C231	25 × Φ6	Φ25	Φ6	12	20	Φ15	10	Φ3
7404T330	32 × M6	Φ32	M6	12	25	Φ18	12	
7404T340	32 × M8	Φ32	M8	13	25	Φ18	12	
7404C341	32 × Φ8	Φ32	Φ8	13	25	Φ18	12	Φ3
7404T440	40 × M8	Φ40	M8	13	30	Φ22	14	
7404T450	40 × M10	Φ40	M10	17	30	Φ22	14	
7404C451	40 × Φ10	Φ40	Φ10	17	30	Φ22	14	Φ3
7404T550	50 × M10	Φ50	M10	17	35	Φ27	16	
7404T560	50 × M12	Φ50	M12	22	35	Φ27	16	
7404C561	50 × Φ12	Φ50	Φ12	22	35	Φ27	16	Φ4
7404T660	63 × M12	Φ63	M12	22	40	Φ32	19	
7404T680	63 × M16	Φ63	M16	25	40	Φ32	19	
7404C681	63 × Φ16	Φ63	Φ16	25	40	Φ32	19	Φ4

SK7400六角把手 Lobe Knobs




材料：黑色亮光热固性塑料的把手、“T” 黄铜螺母

Material: Duroplast body, “T” brass nut

代号 Code	规格 Description	D	d	h	H	D ₁	H ₁
7400T220	22 × M5	Φ22	M5	9	19	Φ14	8
7400T230	22 × M6	Φ22	M6	12	19	Φ14	8
7400T330	33 × M6	Φ33	M6	12	23	Φ19	10
7400T340	33 × M8	Φ33	M8	13	23	Φ19	10
7400T440	44 × M8	Φ44	M8	13	27	Φ23	11
7400T450	44 × M10	Φ44	M10	17	27	Φ23	11
7400T550	55 × M10	Φ55	M10	17	33	Φ25	13
7400T560	55 × M12	Φ55	M12	22	33	Φ25	13


SK7402T尼龙七星把手 Star knobs

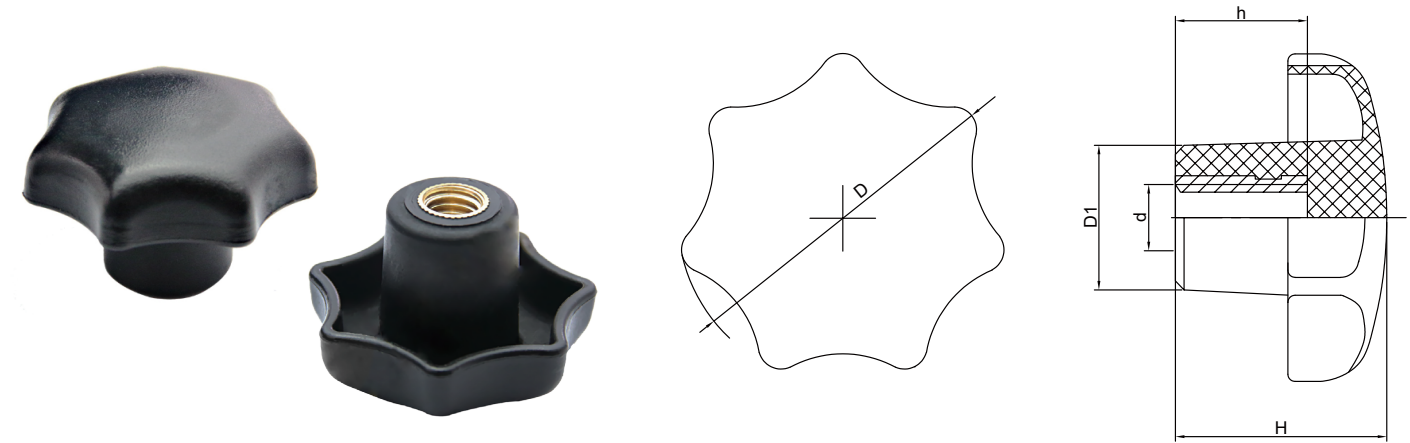

材料：黑色亚光聚酰胺把手、“T” 黄铜螺母嵌件
Material: Matte polyamide resin body, “T” brass nut

代号 Code	规格 Description	D	d	h	H	D1
7402T220	25 × M5	25	M5	10	16	11
7402T330	32 × M6	32	M6	12	23	12
7402T440	40 × M8	40	M8	16	25	18
7402T550	50 × M10	50	M10	20	32	22
7402T660	63 × M12	63	M12	25	39	/
7402T880	80 × M16	80	M16	28	50	29

SK7412T通孔五星把手 Through hole five star knobs

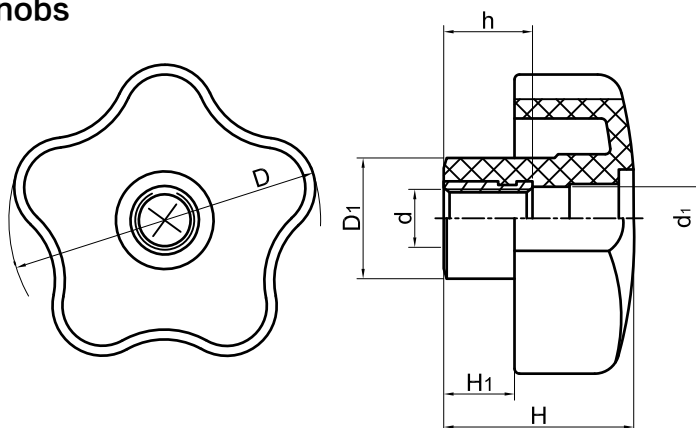


材料：黑色亚光聚酰胺把手、“T”黄铜螺母嵌件

Material: Matte polyamide resin body, “T” brass nut

代号 Code	规格 Description	D	d	h	H	D1	H1	d1
7412T330	32 × M6	Φ32	M6	13	23	Φ15	11	Φ6.8
7412T340	32 × M8	Φ32	M8	13	23	Φ15	11	Φ8.8
7412T440	40 × M8	Φ40	M8	13	27	Φ17	12.5	Φ8.8
7412T450	40 × M10	Φ40	M10	13	27	Φ17	12.5	Φ10.8
7412T550	50 × M10	Φ50	M10	15	34	Φ21.5	13.5	Φ10.8
7412T560	50 × M12	Φ50	M12	15	34	Φ21.5	13.5	Φ12.8
7412T660	63 × M12	Φ63	M12	16	39	Φ24.5	14.5	Φ12.8
7412T680	63 × M16	Φ63	M16	16	39	Φ24.5	14.5	Φ16.8

SK7414T通孔七星把手 Through hole seven star knobs



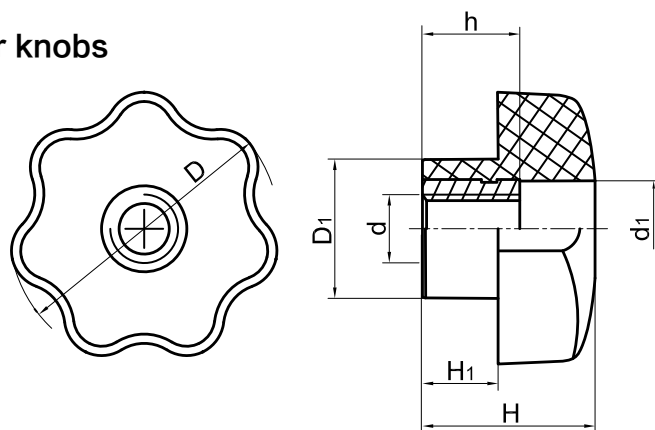


材料：黑色亮光热固性塑料把手、“T”黄铜螺母嵌件

Material: Duroplast body, “T” brass nut

代号 Code	规格 Description	D	d	h	H	D1	H1	d1
7414T220	25 × M5	Φ25	M5	14	19.5	Φ14.5	9	Φ7.9
7414T230	25 × M6	Φ25	M6	14	19.5	Φ14.5	9	Φ7.9
7414T330	32 × M6	Φ32	M6	14	23	Φ18	11	Φ10.5
7414T340	32 × M8	Φ32	M8	14	23	Φ18	11	Φ10.5
7414T440	40 × M8	Φ40	M8	18	29	Φ21.5	14	Φ12
7414T450	40 × M10	Φ40	M10	18	29	Φ21.5	14	Φ12
7414T550	50 × M10	Φ50	M10	18	32	Φ25.5	14	Φ17
7414T560	50 × M12	Φ50	M12	18	32	Φ25.5	14	Φ17
7414T660	63 × M12	Φ63	M12	18	38	Φ30.5	20	Φ17
7414T680	63 × M16	Φ63	M16	18	38	Φ30.5	20	Φ17


SK7401六角把手 Lobe Knobs

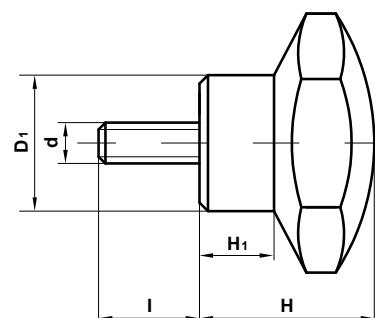

材料：黑色亮光热固性塑料的把手、白色镀锌处理的钢质螺杆
Material: Duroplast body, White galvanized steel bolt thread

代号 Code	规格 Description	D	d	I	H	D1	H1
7401221	22 × M5 × 15	Φ22	M5	15	19	Φ12	8
7401222	22 × M5 × 20	Φ22	M5	20	19	Φ12	8
7401223	22 × M5 × 25	Φ22	M5	25	19	Φ12	8
7401224	22 × M5 × 30	Φ22	M5	30	19	Φ12	8
7401231	22 × M6 × 15	Φ22	M6	15	19	Φ12	8
7401232	22 × M6 × 20	Φ22	M6	20	19	Φ12	8
7401233	22 × M6 × 25	Φ22	M6	25	19	Φ12	8
7401234	22 × M6 × 30	Φ22	M6	30	19	Φ12	8
7401331	33 × M6 × 15	Φ33	M6	15	23	Φ19	10
7401332	33 × M6 × 20	Φ33	M6	20	23	Φ19	10
7401333	33 × M6 × 25	Φ33	M6	25	23	Φ19	10
7401334	33 × M6 × 30	Φ33	M6	30	23	Φ19	10
7401342	33 × M8 × 20	Φ33	M8	20	23	Φ19	10
7401343	33 × M8 × 25	Φ33	M8	25	23	Φ19	10
7401344	33 × M8 × 30	Φ33	M8	30	23	Φ19	10
7401346	33 × M8 × 40	Φ33	M8	40	23	Φ19	10
7401347	33 × M8 × 50	Φ33	M8	50	23	Φ19	10
7401442	44 × M8 × 20	Φ44	M8	20	27	Φ23	11
7401443	44 × M8 × 25	Φ44	M8	25	27	Φ23	11
7401444	44 × M8 × 30	Φ44	M8	30	27	Φ23	11
7401446	44 × M8 × 40	Φ44	M8	40	27	Φ23	11
7401447	44 × M8 × 50	Φ44	M8	50	27	Φ23	11
7401452	44 × M10 × 20	Φ44	M10	20	27	Φ23	11
7401453	44 × M10 × 25	Φ44	M10	25	27	Φ23	11
7401454	44 × M10 × 30	Φ44	M10	30	27	Φ23	11
7401456	44 × M10 × 40	Φ44	M10	40	27	Φ23	11
7401457	44 × M10 × 50	Φ44	M10	50	27	Φ23	11
7401552	55 × M10 × 20	Φ55	M10	20	33	Φ25	13
7401553	55 × M10 × 25	Φ55	M10	25	33	Φ25	13
7401554	55 × M10 × 30	Φ55	M10	30	33	Φ25	13
7401556	55 × M10 × 40	Φ55	M10	40	33	Φ25	13
7401557	55 × M10 × 50	Φ55	M10	50	33	Φ25	13
7401563	55 × M12 × 25	Φ55	M12	25	33	Φ25	13
7401564	55 × M12 × 30	Φ55	M12	30	33	Φ25	13
7401566	55 × M12 × 40	Φ55	M12	40	33	Φ25	13
7401567	55 × M12 × 50	Φ55	M12	50	33	Φ25	13
7401568	55 × M12 × 60	Φ55	M12	60	33	Φ25	13


SK7405七星把手 Star knobs

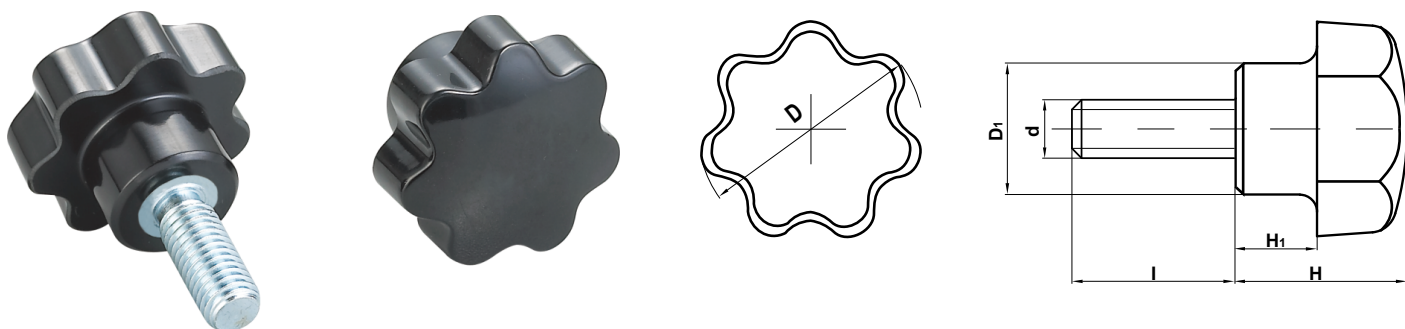

材料：黑色亮光热固性塑料的把手、白色镀锌处理的钢质螺杆
Material: Duroplast body, White galvanized steel bolt thread

代号 Code	规格 Description	D	d	l	H	D1	H1
7405221	25 × M5 × 15	Φ25	M5	15	20	Φ15	10
7405222	25 × M5 × 20	Φ25	M5	20	20	Φ15	10
7405223	25 × M5 × 25	Φ25	M5	25	20	Φ15	10
7405224	25 × M5 × 30	Φ25	M5	30	20	Φ15	10
7405231	25 × M6 × 15	Φ25	M6	15	20	Φ15	10
7405232	25 × M6 × 20	Φ25	M6	20	20	Φ15	10
7405233	25 × M6 × 25	Φ25	M6	25	20	Φ15	10
7405234	25 × M6 × 30	Φ25	M6	30	20	Φ15	10
7405331	32 × M6 × 15	Φ32	M6	15	25	Φ18	12
7405332	32 × M6 × 20	Φ32	M6	20	25	Φ18	12
7405333	32 × M6 × 25	Φ32	M6	25	25	Φ18	12
7405334	32 × M6 × 30	Φ32	M6	30	25	Φ18	12
7405342	32 × M8 × 20	Φ32	M8	20	25	Φ18	12
7405343	32 × M8 × 25	Φ32	M8	25	25	Φ18	12
7405344	32 × M8 × 30	Φ32	M8	30	25	Φ18	12
7405346	32 × M8 × 40	Φ32	M8	40	25	Φ18	12
7405347	32 × M8 × 50	Φ32	M8	50	25	Φ18	12
7405442	40 × M8 × 20	Φ40	M8	20	30	Φ22	14
7405443	40 × M8 × 25	Φ40	M8	25	30	Φ22	14
7405444	40 × M8 × 30	Φ40	M8	30	30	Φ22	14
7405446	40 × M8 × 40	Φ40	M8	40	30	Φ22	14
7405447	40 × M8 × 50	Φ40	M8	50	30	Φ22	14
7405452	40 × M10 × 20	Φ40	M10	20	30	Φ22	14
7405453	40 × M10 × 25	Φ40	M10	25	30	Φ22	14
7405454	40 × M10 × 30	Φ40	M10	30	30	Φ22	14
7405456	40 × M10 × 40	Φ40	M10	40	30	Φ22	14
7405457	40 × M10 × 50	Φ40	M10	50	30	Φ22	14
7405552	50 × M10 × 20	Φ50	M10	20	35	Φ27	16
7405553	50 × M10 × 25	Φ50	M10	25	35	Φ27	16
7405554	50 × M10 × 30	Φ50	M10	30	35	Φ27	16
7405556	50 × M10 × 40	Φ50	M10	40	35	Φ27	16
7405557	50 × M10 × 50	Φ50	M10	50	35	Φ27	16
7405563	50 × M12 × 25	Φ50	M12	25	35	Φ27	16
7405564	50 × M12 × 30	Φ50	M12	30	35	Φ27	16
7405566	50 × M12 × 40	Φ50	M12	40	35	Φ27	16
7405567	50 × M12 × 50	Φ50	M12	50	35	Φ27	16
7405568	50 × M12 × 60	Φ50	M12	60	35	Φ27	16
7405684	63 × M16 × 30	Φ63	M16	30	40	Φ32	19
7405686	63 × M16 × 40	Φ63	M16	40	40	Φ32	19
7405687	63 × M16 × 50	Φ63	M16	50	40	Φ32	19
7405688	63 × M16 × 60	Φ63	M16	60	40	Φ32	19


SK7441手柄球 Spherical knobs

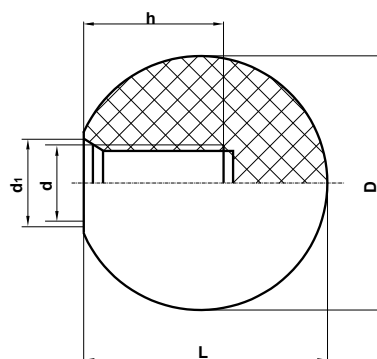

材料：黑色亮光热固性塑料
Material: Duroplast

代号 Code	规格 Description	D	d	h	L	d1
7441120	20 × M5	Φ20	M5	12	19	8.8
7441130	20 × M6	Φ20	M6	14	19	8.8
7441230	25 × M6	Φ25	M6	14	24	10
7441240	25 × M8	Φ25	M8	16	24	10
7441340	32 × M8	Φ32	M8	16	31	12
7441350	32 × M10	Φ32	M10	20	31	12
7441X50	35 × M10	Φ35	M10	20	34	12
7441450	40 × M10	Φ40	M10	20	39	17.8
7441460	40 × M12	Φ40	M12	25	39	17.8
7441560	50 × M12	Φ50	M12	25	47	25
7441580	50 × M16	Φ50	M16	32	47	25


SK7442T手柄球 Spherical knobs

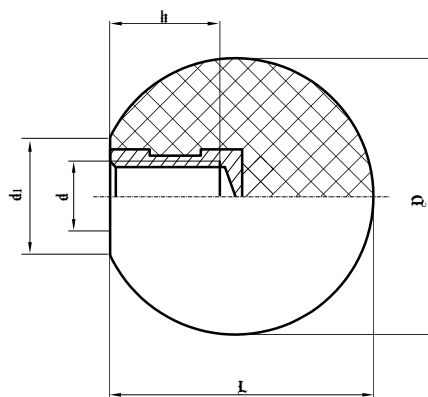

材料：黑色亮光热固性塑料、“T” 黄铜螺母
Material: Duroplast, “T” brass nut

代号 Code	规格 Description	D	d	h	L	d1
7442T120	20 × M5	Φ20	M5	9	19	9.8
7442T130	20 × M6	Φ20	M6	12	19	9.8
7442T230	25 × M6	Φ25	M6	12	24	12
7442T240	25 × M8	Φ25	M8	13	24	12
7442T340	32 × M8	Φ32	M8	13	31	14.2
7442T350	32 × M10	Φ32	M10	17	31	14.2
7442TX50	35 × M10	Φ35	M10	17	34	14.2
7442T450	40 × M10	Φ40	M10	17	39	17.5
7442T460	40 × M12	Φ40	M12	22	39	17.5


SK7443锥形手柄套 Cone-shape knobs

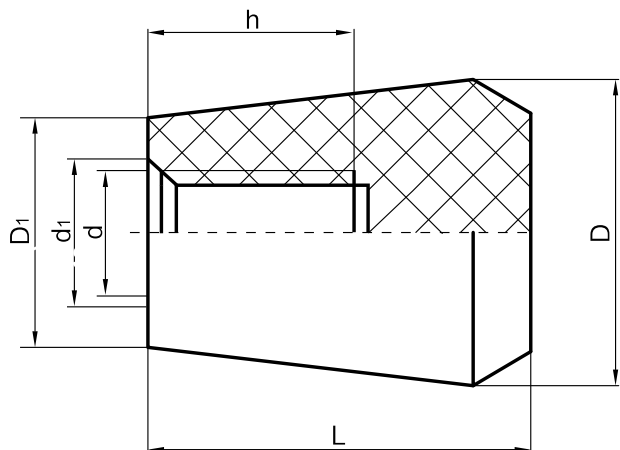

材料：黑色亮光热固性塑料
Material: Duroplast

代号 Code	规格 Description	L	d	h	D	D1	d1
7443130	20 × M6	20	M6	14	Φ16	Φ12	8.8
7443240	25 × M8	25	M8	16	Φ20	Φ15	11.8
7443350	32 × M10	32	M10	20	Φ25	Φ20	13.8
7443460	40 × M12	40	M12	25	Φ32	Φ25	17.7
7443580	50 × M16	50	M16	32	Φ40	Φ32	21.7

SK7447长手柄套 Long knobs

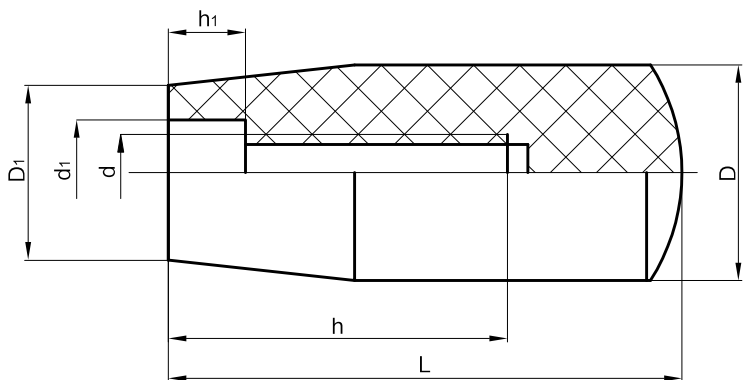


材料：黑色亮光热固性塑料
Material: Duroplast

代号 Code	规格 Description	L	d	h	D	D1	d1	h1
7447540	50 × M8	50	M8	35	Φ21	Φ17	Φ10.3	8
7447650	63 × M10	63	M10	40	Φ23	Φ19	Φ12.3	7.5
7447760	80 × M12	80	M12	55	Φ26	Φ21	Φ14.3	7.5
7447870	100 × M14	100	M14	65	Φ30	Φ24	Φ16.3	8



可调冷却管 Adjustable coolant hoses

编码与订货说明 /Coding and ordering instructions

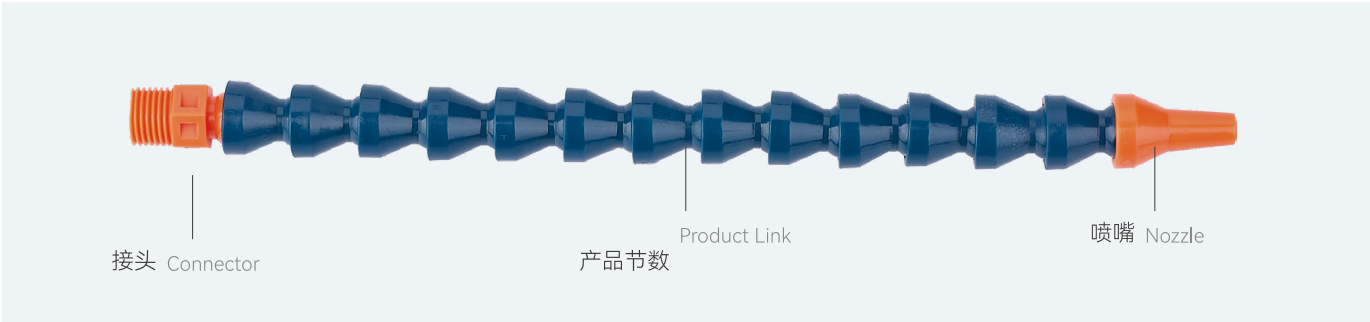

G1/4	C	N	18
成品代号 Trimmed Code	接头代号 Connector Code	喷嘴代号 Nozzle Code	产品节数 Product Link

1. 成品代号，是指产品的内径大小，如：“内径为 1/4”，在零件里代码表示为 G1/4...”

2. 接头代号，是指零部件中接头的序号 C (01~90)，如：1/8 螺纹接头 代号是 C01...；

3. 喷嘴代号，是指零部件中喷嘴的序号 N (01~90)，如：1/4 直角圆嘴 代号是 N01...；

4. 产品节数，是指管体的节数，不包含接头和喷嘴；

5. 对颜色螺纹有要求，需备注。
1. Finished product code refers to the inner diameter of the product, such as: "The inner diameter is 1/4", and the code in the part is represented as G1/4..."

2. Joint code refers to the serial number C (01~90) of the joint in the component, such as: 1/8 threaded joint code is C01;


3. Nozzle code refers to the serial number N (01~90) of the nozzle in the component, such as: the code for 1/4 right angle round nozzle is N01;

4. The number of product sections refers to the number of sections of the pipe body, excluding joints and nozzles;


5. There are requirements for color threads, which need to be noted.

规格 Size	代码 Code
1/4"	G1/4
3/8"	G3/8
1/2"	G1/2

1/4" 系列 1/4 Series

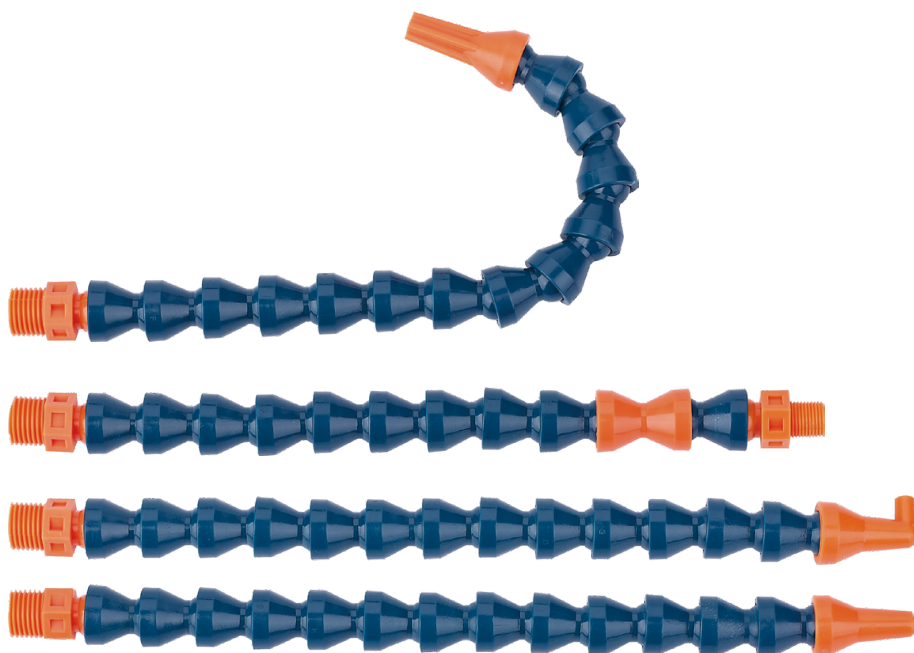


总长	=	接头尺寸	+	冷却管本体尺寸	+	喷嘴尺寸
Overall length		Connector size		Hose body size		Nozzle size



可调冷却管的组装 /Assembly of adjustable coolant hoses

使用专用的冷却管组装钳即可简单的拆装冷却管。

With a special pliers, we can dismount and assemble coolant hose simply.

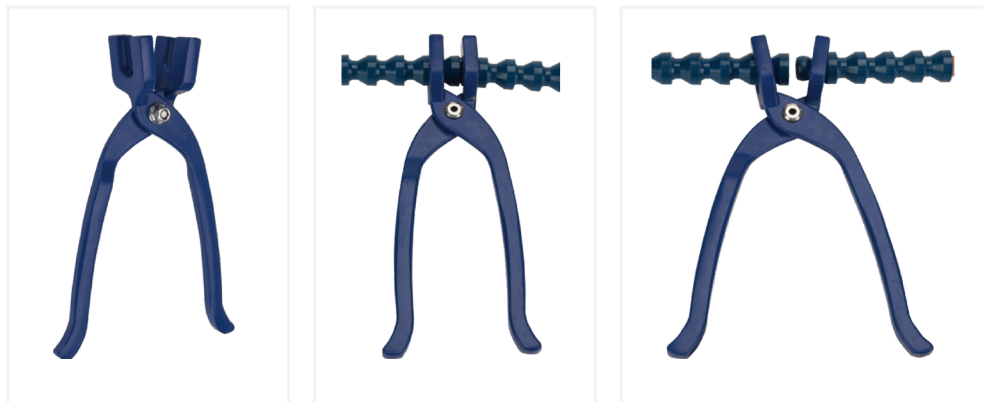

附件 /Appendix 1/4

φ3.2



编号 Code: N01

1/4 直角圆嘴
Right angle
round nozzle

φ4.5



编号 Code: N02

1/4 直角圆嘴
Right angle
round nozzle

φ6



编号 Code: N03

1/4 直角圆嘴
Right angle
round nozzle



编号 Code: N04

1/4 菱形喷嘴
Diamond nozzle

φ1.8



编号 Code: N05

1/8 圆嘴
Circular nozzle

φ3



编号 Code: N06

1/4 圆嘴
Circular nozzle

φ4.3



编号 Code: N07

1/4 圆嘴
Circular nozzle

φ6



编号 Code: N08

1/4 圆嘴
Circular nozzle



编号 Code: N09

1/4 双接头
Double connector



编号 Code: N10

1/4 Y型三通
Y-shaped tee

2×22.5



编号 Code: N11

1/4 扇形扁嘴
Fan-shaped flat
mouth



编号 Code: N12

1/4 管体开关
Tube switch



编号 Code: C01

1/8 螺纹接头
Threaded connector



编号 Code: C02


1/4 螺纹接头
Threaded connector




编号 Code: C03

1/4 螺纹开关
Threaded switch

3/8" 系列 3/8 Series

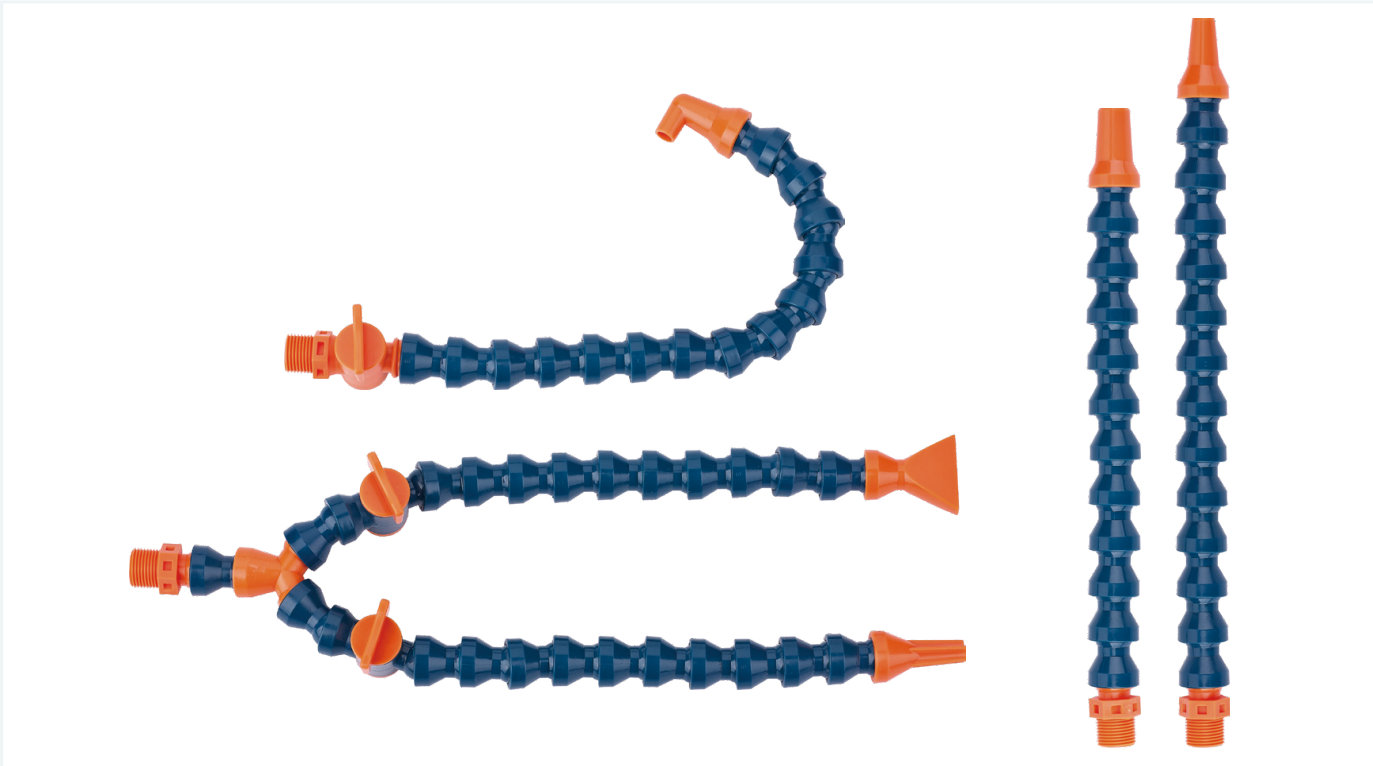


总长	=	接头尺寸	+	冷却管本体尺寸	+	喷嘴尺寸
Overall length		Connector size		Hose body size		Nozzle size

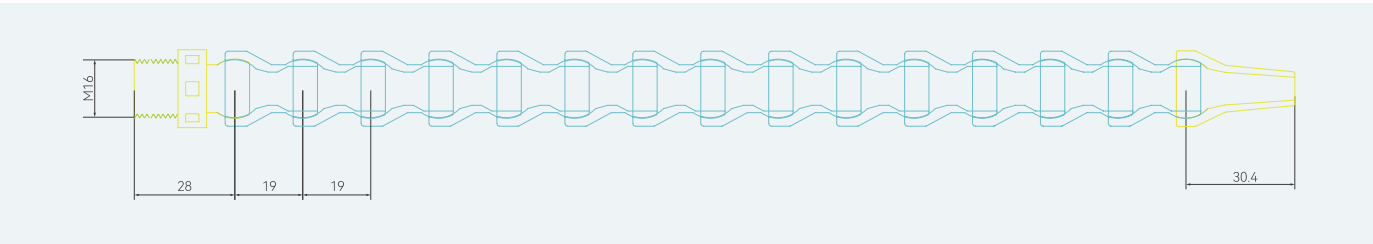

可调冷却管的组装 /Assembly of adjustable coolant hoses

使用专用的冷却管组装钳即可简单的拆装冷却管。

With a special pliers, we can dismount and assemble coolant hose simply.

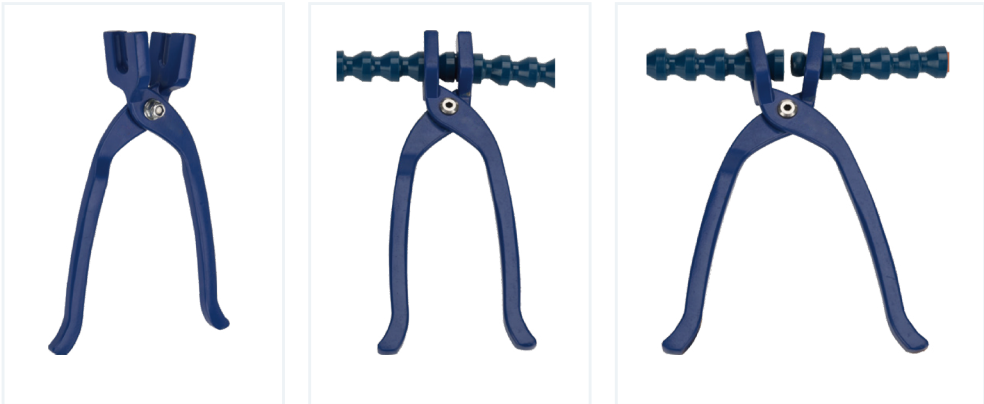

附件 /Appendix 3/8

φ6.5



编号 Code: N31

3/8 直角圆嘴
Right angle
round nozzle

φ9.6



编号 Code: N32

3/8 直角圆嘴
Right angle
round nozzle

φ11



编号 Code: N33

3/8 直角圆嘴
Right angle
round nozzle



编号 Code: N34

3/8 菱形喷嘴
Diamond nozzle

φ6.3



编号 Code: N35

3/8 圆嘴
Large diameter circular
nozzle

φ9.5



编号 Code: N36

3/8 圆嘴
Small diameter circular
nozzle

φ11



编号 Code: N37

3/8 圆嘴
Small diameter circular
nozzle



编号 Code: N38

3/8 双接头
Double connector



编号 Code: N39

3/8 Y型三通
Y-shaped tee

2.6×25



编号 Code: N40

3/8 扇形扁嘴
Fan-shaped flat
mouth

2.8×32



编号 Code: N41

3/8 扇形扁嘴
Fan-shaped flat
mouth



编号 Code: N42

3/8 管体开关
Tube switch



编号 Code: C10

3/8 螺纹接头
Threaded joint



编号 Code: C11


1/2 螺纹接头
Threaded joint




编号 Code: C12

3/8 螺纹开关
Threaded switch

1/2" 系列 1/2 Series

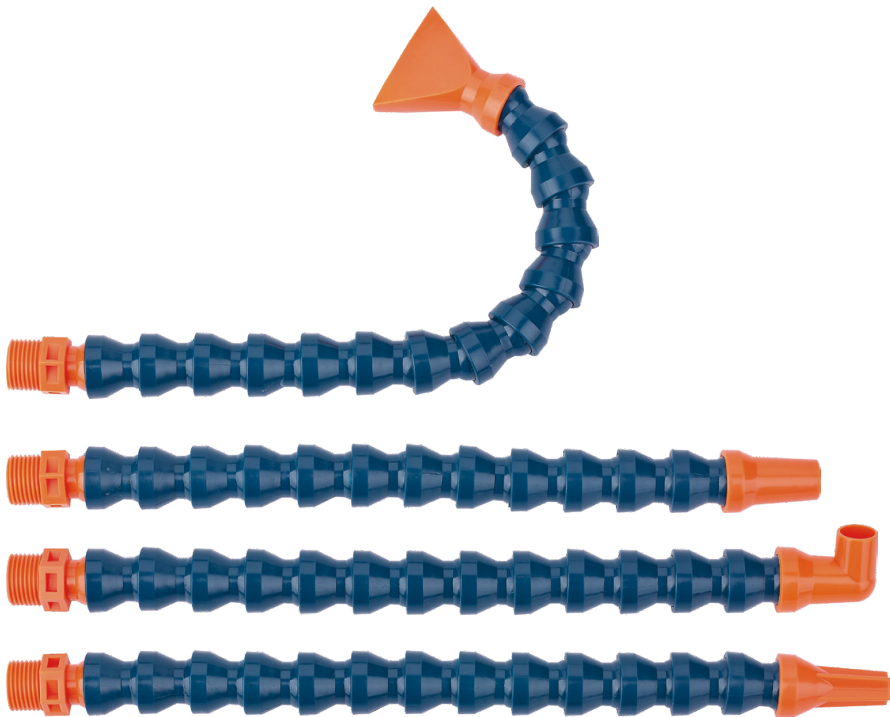


总长	=	接头尺寸	+	冷却管本体尺寸	+	喷嘴尺寸
Overall length		Connector size		Hose body size		Nozzle size

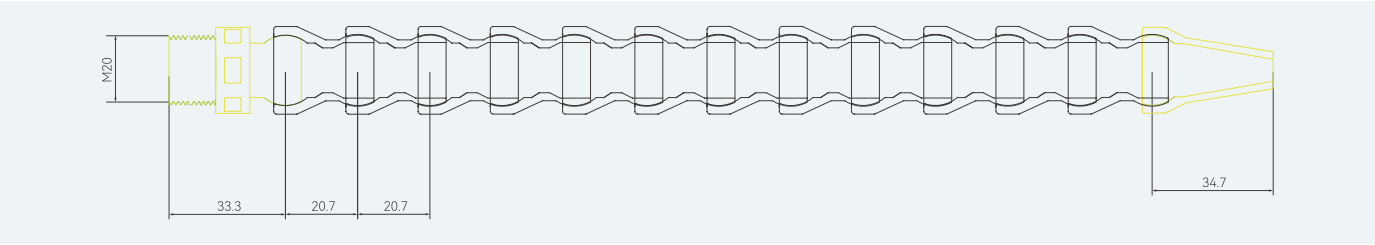

可调冷却管的组装 /Assembly of adjustable coolant hoses

使用专用的冷却管组装钳即可简单的拆装冷却管。
With a special pliers, we can dismount and assemble coolant hose simply.

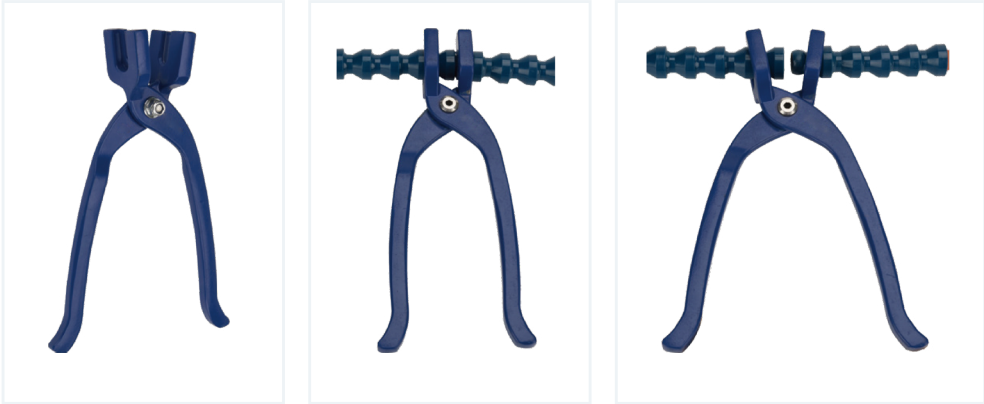

附件 /Appendix 1/2




1/2 直角圆嘴
Right angle
round nozzle



1/2 直角圆嘴
Right angle
round nozzle



1/2 直角圆嘴
Right angle
round nozzle

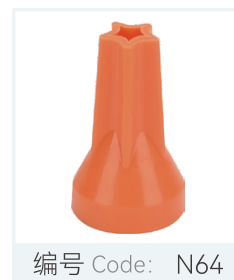

1/2 菱形喷嘴
Diamond nozzle




1/2 圆嘴
Circular nozzle



1/2 圆嘴
Circular nozzle



1/2 圆嘴
Circular nozzle

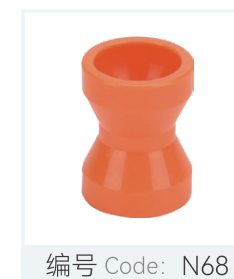

1/2 双接头
Double connector



1/2 Y 型三通
Y-shaped tee



1/2 扇形扁嘴
Fan-shaped flat
mouth



1/2 扇形扁嘴
Fan-shaped flat
mouth



1/2 管体开关
Tube switch



3/8 螺纹接头
Threaded connector



1/2 螺纹接头
Threaded connector



1/2 螺纹开关
Threaded switch